



TRIM STYLES




Angle-Cut Reflector

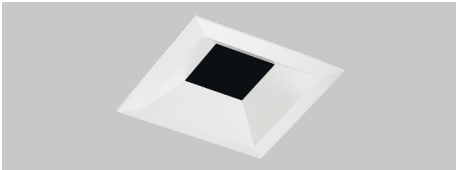

Bevels

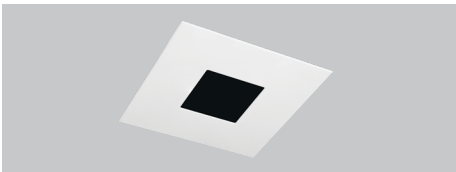

Pinholes



A Dimension:
Self Flanged: 4.5"
Flangeless: 3.625"

FEATURES

SPOT ON! OPTICS

- Beam Distributions from 5 - 60, Field Interchangeable Optics from 12 - 60 degrees
- Patented self-adjusting optic holder accommodates up to 3 beam control lenses or filters (US Patent 8,950,911)

ACU-AIM™ PRECISION AIMING

- Precision geared hot-aiming provides 370° horizontal, 45° vertical aiming via Philips screwdriver
- Optimized center beam optics translates center of the beam through the center of the aperture resulting in low aperture brightness

EXCEPTIONAL PERFORMANCE FROM 3-INCH APERTURE

- Up to 2651 lumens, 25,803 CBCP Delivered!
- Exceptionally consistent color with < 2SDCM for Static White & Tunable White; <1SDCM for WarmDim
- Excellent color rendition with 95+ CRI | 90+ R9 Available
- WarmDim® option mimics halogen dimming (3000K-1800K)
- Tunable White CCT range of 5000K –2700K

PERFORMANCE

LUMEN PACKAGE	WATTS IN	DELIVERED LUMENS	EFFICACY (LPW)	MCBCP
Static White*				
06LM	12	549	47	31201
08LM	7	724	103	7050
12LM	11	1063	97	10344
15LM	14	1319	94	12841
20LM	20	1865	93	18153
25LM	26	2316	89	22549
30LM	33	2651	80	25803
WarmDim®				
08LM	14	738	52	10070
12LM	20	1190	59	8490
15LM	26	1473	57	6382
Tunable White				
08LM	12	927	77	5583
12LM	18	1386	77	8345
15LM	20	1551	78	9339
20LM	31	2184	70	13153

Performance with 3SQA trim at 30K 80CRI (Static White) | 30K 90CRI (WarmDim) | 50K 90CRI (Tunable White)


*06LM shown at 90CRI




FLANGE STYLES



Self-Flanged

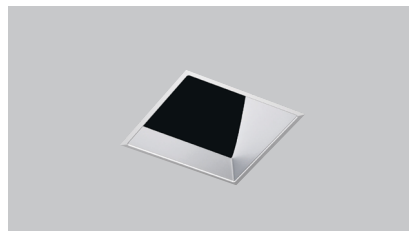

Flangeless (Gypsum)

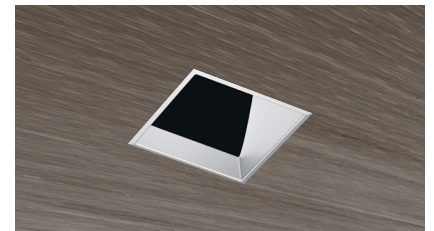

Flangeless (Wood | Stone | Tile)

ORDERING INFORMATION

EXAMPLE: AX3SQ A G4 25LM 30K 95CRI 24D FPC 120 ICAT 3SQABV BS WHSF

Housing		Lumens	CCT	CRI ²	Beam	Driver	Voltage ⁴	Ratings	Options	
AX3SQ A New Construction Adjustable AX3SQ LPA Low Profile New Construction Adjustable	G4	Static White							(blank) Non-ICAT CP ⁵ Chicago Plenum ICAT ⁵ IC Rated, Air-tight	NLIGHT ⁶ nLight Dimming pack controls (Static White and WarmDim only) E6WT20R ^{7,11} Emergency 6W battery pack with remote test switch, T20 compliant
		06LM ¹⁰ 600 lumens	27K 2700K	80CRI	05D ¹⁰ 5° beam	GZ1 0-10V 1% min	120			
		08LM 800 lumens	30K 3000K	90CRI	12D 12° beam	EZ1 0-10V eldoLED linear 1% min	277			
		12LM 1200 lumens	35K 3500K	95CRI	20D 20° beam	EZB 0-10V eldoLED log <1% min	MVOLT (120-277)			
		15LM 1500 lumens			24D 24° beam	EDXB eldoLED DMX square <1% min				
		20LM 2000 lumens			30D 30° beam	EDAB eldoLED DALI 6 log <1% min				
		25LM 2500 lumens			35D 35° beam	FPC Phase Cut Dimming 1% min				
		30LM ¹ 3000 lumens			40D 40° beam	ECOD ¹¹ Lutron EcoSystem 1% min				
					45D 45° beam					
					50D 50° beam					
					60D 60° beam					
					60D20D 60° x 20°					
(Blank)	(Blank)	WarmDim®								
		08LM 800 lumens	WDIM HALR 3000K - 1800K	90CRI	12D ³ 12° beam	GZ1 0-10V 1% min				
		12LM 1200 lumens			15D ³ 15° beam	FPC Phase Cut Dimming 1% min				
		15LM 1500 lumens			20D ³ 20° beam					
					24D 24° beam					
					35D 35° beam					
					40D 40° beam					
					50D 50° beam					
					60D20D 60°x 20°					
		Tunable White								
		08LM 800 lumens	TUWH 5000K - 2700K	90CRI	20D 20° beam	GZ1 0-10V 1% min				
		12LM 1200 lumens			24D 24° beam	NLT ⁶ nLight nTune interface				
15LM 1500 lumens			35D 35° beam	EDAB eldoLED DALI 6 log <1% min						
20LM 2000 lumens			40D 40° beam	EDABT8 eldoLED DALI 8 log <1% min						
			50D 50° beam							
			60D20D 60° x 20°							

Adjustable Trim	Reflector Finish	Flange Style	Trim Lens Environment	Ceiling Installation
Reflector 3SQA Angle Cut Reflector (0-45°) 	W White Paint CD Clear Diffuse BD Black Diffuse WTD Wheat Diffuse	Flanged SF Self Flanged (same finish as reflector) WHSF Self Flanged, White Painted Flange (not available with W finish) Flangeless⁸ FM Flangeless	(blank) Open Damp Location WET Clear Wet Location	Flanged (blank) Ceiling Thickness < 0.875" CTA3SQ/125 Ceiling Thickness 0.875" - 1.25" CTA3SQ/163 Ceiling Thickness 1.25" - 1.625" Flangeless (Gypsum) FMA3SQ/087 Ceiling Thickness < 0.875" FMA3SQ/125 Ceiling Thickness 0.875" - 1.25" FMA3SQ/163 Ceiling Thickness 1.25" - 1.625" Flangeless (Wood Stone Tile)⁹ SFM3SQ/100 (B,W) Ceiling Thickness < 1.00" SFM3SQ/138 (B,W) Ceiling Thickness 1.00" - 1.375" SFM3SQ/163 (B,W) Ceiling Thickness 1.375" - 1.625"
Bevels 3SQABV Bevel Adjustable  3SQSHABV Dead Front, Non Conductive Shower Bevel Adjustable 	Upper Reflector (Shield) Finish BS Black Specular BD Black Diffuse	Trim Finish & Flange Style Flanged WHSF White, Flanged BLSF Black, Flanged Flangeless⁸ WHFM White, Flangeless BLFM Black, Flangeless	(blank) Open Damp Location WET Solite Wet Location	
Pinholes 3SQAPIN 1 1/4" Pinhole Adjustable  3SQAPINLG 1 3/4" Pinhole Adjustable 				

REFLECTOR FINISHES




BEVEL & PINHOLE FINISHES

Upper Reflector Finish



Trim Finish



ORDERING NOTES

- 30LM not available with LPA
- 95CRI available on 27K and 30K only. 80 & 95 CRI not available at 06LM. Contact factory for other CCT/CRI combinations.
- For WDIM, 12D only available with 08LM; 15D only available with 12LM; 20D only available with 15LM
- MVOLT standard on GZ1, EZ1, EZB, ECOD, EDXB, EDAB, EDABT8, NLT (unless NLIGHT). Must be 120 for FPC.
- CP or ICAT not available with LPA at 25LM; not available with A at 30LM; not available with 15LM WDIM or 20LM TUWH
- Must specify 120 or 277 volts for NLIGHT; MVOLT for NLT. NLIGHT only available with GZ1 for 06LM or warmDim. NLIGHT only available with EZ1 or EZB (for static white). NLT and NLIGHT not available with CP.
- E6WT20R not available with WDIM, TUWH, EDXB, CP, ICAT, or NLIGHT.
- Must specify FMA3SQ or SFM3SQ option.
- Specify finish: B = Black, W = White.
- 06LM only available in 05D, and 05D only available in 06LM.
- ECOD, E6WT20R not available at 06LM.

ACCESSORIES


Beam Control Lenses & Filters		Replacement Optics		Optional Installation Accessories	
DIFF 200	Diffuse Spread lens	Static White Optics		WarmDim Optics	
SOLITE 200	Solite Uniformity Lens	3AXOPT/12D	12° Beam	3AXWDOPT/12D	12° Beam
PRISM 200	Prismatic Lens	3AXOPT/20D	20° Beam	3AXWDOPT/15D	15° Beam
LSPREAD 200	Linear Spread Lens	3AXOPT/24D	24° Beam	3AXWDOPT/20D	20° Beam
HCLBL 200	Hexcell Louver	3AXOPT/30D	30° Beam	3AXWDOPT/24D	24° Beam
UVF 200	UV Filter Lens	3AXOPT/35D	35° Beam	3AXWDOPT/35D	35° Beam
DCCF 200 HAL4250	Daylight Blue Correction	3AXOPT/40D	40° Beam	3AXWDOPT/40D	40° Beam
DIFF 200 05D	Diffusing Lens for 05D (+10 & +20)	3AXOPT/45D	45° Beam	3AXWDOPT/50D	50° Beam
		3AXOPT/50D	50° Beam	3AXWDOPT/60D20D	60°x20° Beam
		3AXOPT/60D	60° Beam	Tunable White Optics	
		3AXOPT/60D20D	60°x20° Beam	3AXTWOPT/20D	20° Beam
				3AXTWOPT/24D	24° Beam
				3AXTWOPT/35D	35° Beam
				3AXTWOPT/40D	40° Beam
				3AXTWOPT/50D	50° Beam
				3AXTWOPT/60D20D	60°x20° Beam
				Bar Hangers	
				HB1	Juno Real Nail® 3 Bar Hangers
				HB26	26" C-Channel Bar Hangers
				HB50	50" C-Channel Bar Hangers
				LB27	27" Linear Bar Hangers
				<i>Note: Fixture supplied with Pro-VI™ Bar Hangers</i>	
				Emergency Inverter	
				IIS 35 HE	Up to 35W Remote Mount Micro Inverter (30LM Excluded)

Spot On! Precision Optics




Smooth, striation-free beams with field-interchangeable TIR optics from 12° to 60°

Acu-Aim™ Precision Aiming

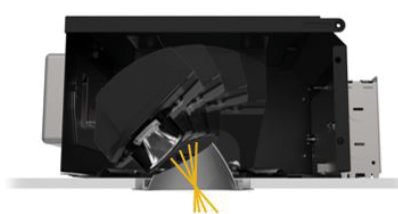

Precision geared hot-aiming is effortless. Centerbeam optics results in lower aperture brightness

Tru-Line™ Precision Installation

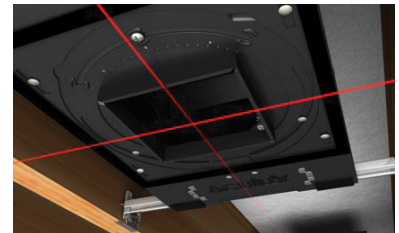

Pro-VI™ bar hangers, coupled with +/-1/2" aperture translation and +/-45° aperture rotation makes perfect installation achievable



PRODUCT SPECIFICATIONS

FIELD INTERCHANGEABLE LED LIGHT ENGINE

- Future proof and easy to maintain-serviceable from below the ceiling

Static White:

- <2SDCMBinning
- 2700K | 3000K | 3500K | 4000K CCT
- 80+ and 90+ available for all CCTs
- 80+CRI and 95+ CRI not available for 600 LM
- 95CRI (>90 R9) only available for 27K & 30K

WarmDim:

- Proprietary WarmDim technology mimics halogen, with CCT shifting from 3000K to 1800K when dimmed.
- <1SDCM Binning, 90+CRI

Tunable White:

- Tunable CCT range 5000K to 2700K
- <2 SDCM Binning, 90+ CRI

SPOT-ON! PRECISION OPTICS

- Beam Distributions from 5 - 60, Field Interchangeable Optics from 12 - 60 degrees
- Patented auto-adjusting optic holder (US Patent 8,950,911). Static White Fixtures accommodate up to three (3) beam control lenses and/or filters for AX3SQ A and up to two (2) for AX3SQ LPA. WarmDim and Tunable White fixtures accommodate up to two (2) beam control lenses and/or filters.
- UGR is zero for fixtures aimed at nadir with a cut-off equal to or less than 60°, per CIE 117-1996 Discomfort Glare in Interior Lighting. [UGR FAQs](#)

ACU-AIM™ PRECISION AIMING

- Precision Geared hot-aiming via Philips screwdriver
- 370° horizontal, 45° vertical aiming
- Optimized center beam optics translates center of the beam through the center of the aperture for maximum efficiency and low aperture brightness
- Numeric indicator marks allow contractor to pre-aim fixtures

HIGH QUALITY TRIMS

- Available with die cast bevels, pinholes, and angle cut reflectors
- Non-corrosive, polycarbonate bevel option for shower applications
- Available in Self Flanged and Flangeless
- Must specify FMA3SQ for gypsum flangeless installation
- Must specify SMF3SQ for wood, stone, tile flangeless installation

FIELD REPLACEABLE DRIVER

- Accommodates 120-277V input and multiple control protocols
- Dims without perceived flicker to <1% depending on driver specified
- Field replaceable without tools from below the ceiling
- >0.9 Power Factor

BUY AMERICAN ACT

- This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations.
- Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY & RATED LIFE

- LED is rated for >50,000 hours at 70% lumen maintenance
- 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.acuitybrands.com/support/warranty/terms-and-conditions>

EMERGENCY BATTERY

- Provides a minimum of 600 lumens (3SQA, 3000K, 80CRI) for minimum duration of 90 minutes.
- Accessible below ceiling for simple service; Self-Testing
- Supplied with Class-2 plenum rated remote test switch
- CEC T20 Compliant

NEW CONSTRUCTION MOUNTING

- Features patented (US Patent 8,038,113) Pro-VI™ bar hanger system compatible with wood stud and T-bar
- Includes vertically adjustable mounting brackets (butterfly brackets) * Excluding 25LM ICAT housings
- Centerline indicators on plaster frame and patented (US Patent 8,277,090) Tru-Line™ Platform featuring +/- 1/2" translation and +/- 45° aperture rotation aids fixture alignment after installation, prior to finishing the ceiling.

JUNCTION BOX

- ICAT Rated for (4) No. 12 AWG 90°C through branch circuit conductors.
- Includes (6) 1/2", (1) 3/4", (4) Non-metallic sheathed cable knock-outs.
- Push-in electrical connectors for field connections.

CODES & LABELS

- UL & cUL listed for through branch wiring, damp location
- Meets energy code Air Leakage requirements per ASTM E283
- Visit www.energystar.gov for specific configurations listed. Not all configurations are Energy Star listed
- Can be used to comply with Title 24, Part 6 with select trims and housings. Reference T24 JA-8 database for list of compliant housings and trims.
- Static White ICAT housings* are rated for direct contact with insulation, including open and closed cell spray foam with a maximum R-value of 7.2R/in. This allows use in ceiling cavities insulated up to R60. WDIM and TUWH ICAT housings* are rated for direct contact with insulation, including open cell spray foam with a maximum R-value of 3.8R/in. They are not suitable for use with closed cell spray foam. *Note: Options: "25LM ICAT", "15LM TUWH ICAT", "ECOD", "EDXB", & "NLIGHT" are excluded and not suitable for use with spray foam insulation.
- 3SQSHABV option can be used to comply with dead front and/or non-conductive lighting electrical code requirements. Flanged (SF) version is certified to IP65
- Union made

CEILING THICKNESS

- Accommodates 1/2" to 1.625" ceiling thickness

A+ CAPABLE LUMINAIRE

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning, when used with Acuity Brands controls products.

- All configurations of this luminaire are calibrated and tested to meet the Acuity Brand's specification for chromatic consistency - including color rendering, color fidelity and color temperature tolerance around standard CIE chromaticity coordinates.

To learn more about Acuity A+ standards, specifications and testing, visit www.acuitybrands.com/aplus.

NOTE:

Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

The product images shown are for illustration purposes only and may not be an exact representation of the product.



DIMENSIONS

Ceiling Cutout: 4-1/8" x 4-1/8" (Refer to installation instructions for flangeless ceiling cutout)




New Construction Adjustable (AX3SQ A)

ICAT/Non-ICAT: 06LM | 08LM | 12LM | 15LM | 20LM

Non-ICAT: 25LM | 30LM

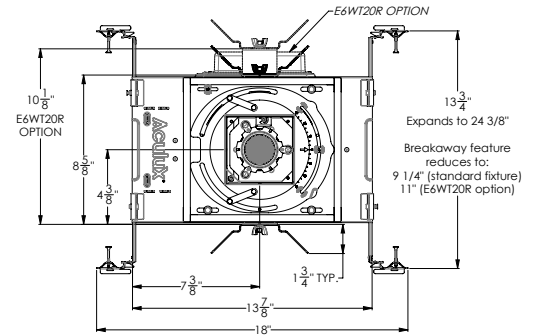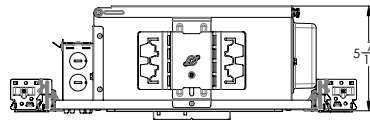




ICAT: 25LM

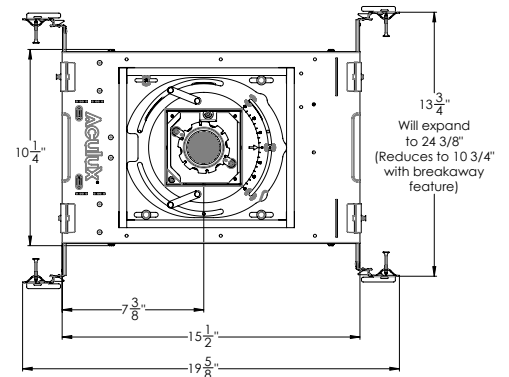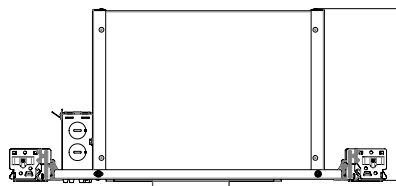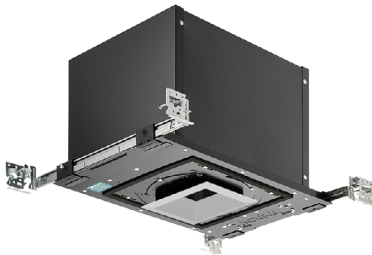

Low Profile New Construction Adjustable (AX3SQ LPA)





ICAT/Non-ICAT: 06LM | 08LM | 12LM | 15LM | 20LM



Non-ICAT: 25LM

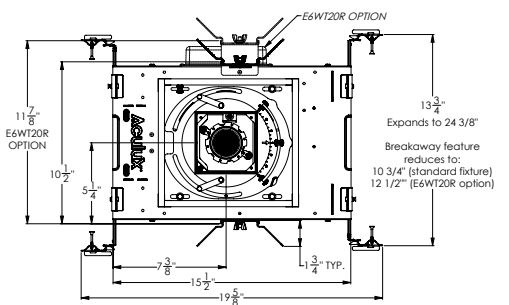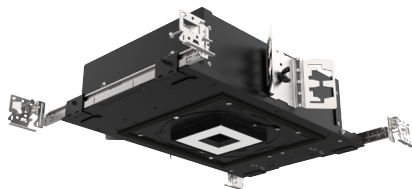

PHOTOMETRICS (@ 30° TILT) - 3SQA

Tested in accordance to IESNA LM79

12 Degree Beam	24 Degree Beam	35 Degree Beam	50 Degree Beam																																																																																								
AX3SQ G4 30LM 30K 80CRI 12D EZ1 MVOLT + 3SQA CD 3000K LEDs, input watts: 32.9, delivered lumens: 2609, LM/W = 79.3, test no. PT03181201	AX3SQ G4 30LM 30K 80CRI 24D EZ1 MVOLT + 3SQA CD 3000K LEDs, input watts: 32.9, delivered lumens: 2520, LM/W = 76.6, test no. PT03181207	AX3SQ G4 30LM 30K 80CRI 35D EZ1 MVOLT + 3SQA CD 3000K LEDs, input watts: 32.9, delivered lumens: 2650, LM/W = 80.5, test no. PT03181213	AX3SQ G4 30LM 30K 80CRI 50D EZ1 MVOLT + 3SQA CD 3000K LEDs, input watts: 32.9, delivered lumens: 2209, LM/W = 67.1, test no. PT03181219																																																																																								
 CP Summary <table><tr><th>0°</th><td>282</td></tr><tr><th>5°</th><td>435</td></tr><tr><th>15°</th><td>3184</td></tr><tr><th>25°</th><td>19654</td></tr><tr><th>35°</th><td>18731</td></tr><tr><th>45°</th><td>2415</td></tr><tr><th>55°</th><td>70</td></tr><tr><th>65°</th><td>1</td></tr><tr><th>75°</th><td>1</td></tr><tr><th>85°</th><td>0</td></tr><tr><th>90°</th><td>0</td></tr></table>	0°	282	5°	435	15°	3184	25°	19654	35°	18731	45°	2415	55°	70	65°	1	75°	1	85°	0	90°	0	 CP Summary <table><tr><th>0°</th><td>670</td></tr><tr><th>5°</th><td>1062</td></tr><tr><th>15°</th><td>4285</td></tr><tr><th>25°</th><td>9777</td></tr><tr><th>35°</th><td>10269</td></tr><tr><th>45°</th><td>3753</td></tr><tr><th>55°</th><td>120</td></tr><tr><th>65°</th><td>2</td></tr><tr><th>75°</th><td>1</td></tr><tr><th>85°</th><td>0</td></tr><tr><th>90°</th><td>0</td></tr></table>	0°	670	5°	1062	15°	4285	25°	9777	35°	10269	45°	3753	55°	120	65°	2	75°	1	85°	0	90°	0	 CP Summary <table><tr><th>0°</th><td>1228</td></tr><tr><th>5°</th><td>2050</td></tr><tr><th>15°</th><td>4506</td></tr><tr><th>25°</th><td>6168</td></tr><tr><th>35°</th><td>6134</td></tr><tr><th>45°</th><td>3689</td></tr><tr><th>55°</th><td>763</td></tr><tr><th>65°</th><td>2</td></tr><tr><th>75°</th><td>1</td></tr><tr><th>85°</th><td>0</td></tr><tr><th>90°</th><td>0</td></tr></table>	0°	1228	5°	2050	15°	4506	25°	6168	35°	6134	45°	3689	55°	763	65°	2	75°	1	85°	0	90°	0	 CP Summary <table><tr><th>0°</th><td>987</td></tr><tr><th>5°</th><td>1466</td></tr><tr><th>15°</th><td>2800</td></tr><tr><th>25°</th><td>3532</td></tr><tr><th>35°</th><td>3582</td></tr><tr><th>45°</th><td>2745</td></tr><tr><th>55°</th><td>725</td></tr><tr><th>65°</th><td>3</td></tr><tr><th>75°</th><td>1</td></tr><tr><th>85°</th><td>0</td></tr><tr><th>90°</th><td>0</td></tr></table>	0°	987	5°	1466	15°	2800	25°	3532	35°	3582	45°	2745	55°	725	65°	3	75°	1	85°	0	90°	0
0°	282																																																																																										
5°	435																																																																																										
15°	3184																																																																																										
25°	19654																																																																																										
35°	18731																																																																																										
45°	2415																																																																																										
55°	70																																																																																										
65°	1																																																																																										
75°	1																																																																																										
85°	0																																																																																										
90°	0																																																																																										
0°	670																																																																																										
5°	1062																																																																																										
15°	4285																																																																																										
25°	9777																																																																																										
35°	10269																																																																																										
45°	3753																																																																																										
55°	120																																																																																										
65°	2																																																																																										
75°	1																																																																																										
85°	0																																																																																										
90°	0																																																																																										
0°	1228																																																																																										
5°	2050																																																																																										
15°	4506																																																																																										
25°	6168																																																																																										
35°	6134																																																																																										
45°	3689																																																																																										
55°	763																																																																																										
65°	2																																																																																										
75°	1																																																																																										
85°	0																																																																																										
90°	0																																																																																										
0°	987																																																																																										
5°	1466																																																																																										
15°	2800																																																																																										
25°	3532																																																																																										
35°	3582																																																																																										
45°	2745																																																																																										
55°	725																																																																																										
65°	3																																																																																										
75°	1																																																																																										
85°	0																																																																																										
90°	0																																																																																										

Measured 30LM 30K 80 CRI		FOR HORIZONTAL AIMING ANGLES 							FOR VERTICAL AIMING ANGLES 								
		Horizontal Aiming Angles							Vertical Aiming Angles								
Beam Spread	CBCP	0°				30°			30°					45°			
		MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W
12D 	25803	6	717	1.7	1.7	466	2.2	1.9	3	358	5.2	3.5	1.7	1014	3.0	1.7	1.2
		8	403	2.2	2.2	262	3.0	2.6	4	202	6.9	4.7	2.2	570	4.0	2.3	1.6
		10	258	2.8	2.8	168	3.7	3.2	5	129	8.7	5.9	2.8	365	5.0	2.8	2.0
		12	179	3.3	3.3	116	4.5	3.8	6	90	10.4	7.1	3.3	253	6.0	3.4	2.4
		14	132	3.9	3.9	86	5.2	4.5	7	66	12.1	8.2	3.9	186	7.0	4.0	2.7
24D 	10954	4	685	1.8	1.8	445	2.5	2.1	2	342	3.5	4.4	1.8	968	2.0	1.9	1.3
		6	304	2.8	2.8	198	3.7	3.2	3	152	5.2	6.6	2.8	430	3.0	2.9	2.0
		8	171	3.7	3.7	111	5.0	4.2	4	86	6.9	8.7	3.7	242	4.0	3.9	2.6
		10	110	4.6	4.6	71	6.2	5.3	5	55	8.7	10.9	4.6	155	5.0	4.9	3.3
		12	76	5.5	5.5	49	7.5	6.4	6	38	10.4	13.1	5.5	108	6.0	5.8	3.9
35D 	6364	4	398	2.6	2.6	258	3.6	3.0	2	199	3.5	7.7	2.6	563	2.0	2.9	1.8
		6	177	3.9	3.9	115	5.4	4.5	3	88	5.2	11.5	3.9	250	3.0	4.4	2.8
		8	99	5.2	5.2	65	7.2	6.0	4	50	6.9	15.3	5.2	141	4.0	5.8	3.7
		10	64	6.5	6.5	41	9.0	7.5	5	32	8.7	19.1	6.5	90	5.0	7.3	4.6
		12	44	7.8	7.8	29	10.8	9.0	6	22	10.4	23.0	7.8	63	6.0	8.8	5.5
50D 	3628	4	227	3.1	3.1	147	4.3	3.5	2	113	3.5	10.9	3.1	321	2.0	3.6	2.2
		6	101	4.6	4.6	65	6.4	5.3	3	50	5.2	16.4	4.6	143	3.0	5.4	3.2
		8	57	6.1	6.1	37	8.6	7.1	4	28	6.9	21.9	6.1	80	4.0	7.2	4.3
		10	36	7.7	7.7	24	10.7	8.8	5	18	8.7	27.3	7.7	51	5.0	9.0	5.4
		12	25	9.2	9.2	16	12.9	10.6	6	13	10.4	32.8	9.2	36	6.0	10.8	6.5

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).





CBCP • Centerbeam candlepower FC • Footcandles at beam center (aim point)



LUMEN | CBCP MULTIPLIERS

CCT	80+ CRI	90+ CRI	95+ CRI
2700K	1.00	0.86	0.65
3000K	1.00	0.88	0.69
3500K	1.05	-	-
4000K	1.07	-	-

PHOTOMETRICS (@ 30° TILT) - 3SQABV

Tested in accordance to IESNA LM79

12 Degree Beam	24 Degree Beam	35 Degree Beam	50 Degree Beam																																																																																																
AX3SQ G4 30LM 30K 80CRI 12D EZ1 MVOLT + 3SQABV BS 3000K LEDs, input watts: 32.9, delivered lumens: 2281, LM/W = 69.3, test no. PT03181204	AX3SQ G4 30LM 30K 80CRI 24D EZ1 MVOLT + 3SQABV BS 3000K LEDs, input watts: 32.9, delivered lumens: 2473, LM/W = 75.2, test no. PT03182104	AX3SQ G4 30LM 30K 80CRI 35D EZ1 MVOLT + 3SQABV BS 3000K LEDs, input watts: 32.9, delivered lumens: 2580, LM/W = 78.4, test no. PT03182110	AX3SQ G4 30LM 30K 80CRI 50D EZ1 MVOLT + 3SQABV BS 3000K LEDs, input watts: 32.9, delivered lumens: 1984, LM/W = 60.3, test no. PT03182116																																																																																																
 CP Summary <table><tr><th>0°</th><th>47°</th></tr><tr><td>0"</td><td>128</td></tr><tr><td>5"</td><td>2217</td></tr><tr><td>15"</td><td>17308</td></tr><tr><td>25"</td><td>18237</td></tr><tr><td>35"</td><td>2408</td></tr><tr><td>45"</td><td>86</td></tr><tr><td>55"</td><td>2</td></tr><tr><td>65"</td><td>0</td></tr><tr><td>75"</td><td>0</td></tr><tr><td>85"</td><td>0</td></tr><tr><td>90°</td><td>0</td></tr></table>	0°	47°	0"	128	5"	2217	15"	17308	25"	18237	35"	2408	45"	86	55"	2	65"	0	75"	0	85"	0	90°	0	 CP Summary <table><tr><th>0°</th><th>129°</th></tr><tr><td>0"</td><td>299</td></tr><tr><td>5"</td><td>4488</td></tr><tr><td>15"</td><td>10601</td></tr><tr><td>25"</td><td>10537</td></tr><tr><td>35"</td><td>4396</td></tr><tr><td>45"</td><td>159</td></tr><tr><td>55"</td><td>1</td></tr><tr><td>65"</td><td>0</td></tr><tr><td>75"</td><td>0</td></tr><tr><td>85"</td><td>0</td></tr><tr><td>90°</td><td>0</td></tr></table>	0°	129°	0"	299	5"	4488	15"	10601	25"	10537	35"	4396	45"	159	55"	1	65"	0	75"	0	85"	0	90°	0	 CP Summary <table><tr><th>0°</th><th>683°</th></tr><tr><td>0"</td><td>1462</td></tr><tr><td>5"</td><td>3979</td></tr><tr><td>15"</td><td>5883</td></tr><tr><td>25"</td><td>6038</td></tr><tr><td>35"</td><td>4406</td></tr><tr><td>45"</td><td>1332</td></tr><tr><td>55"</td><td>2</td></tr><tr><td>65"</td><td>0</td></tr><tr><td>75"</td><td>0</td></tr><tr><td>85"</td><td>0</td></tr><tr><td>90°</td><td>0</td></tr></table>	0°	683°	0"	1462	5"	3979	15"	5883	25"	6038	35"	4406	45"	1332	55"	2	65"	0	75"	0	85"	0	90°	0	 CP Summary <table><tr><th>0°</th><th>657°</th></tr><tr><td>0"</td><td>1060</td></tr><tr><td>5"</td><td>2405</td></tr><tr><td>15"</td><td>2810</td></tr><tr><td>25"</td><td>2778</td></tr><tr><td>35"</td><td>2614</td></tr><tr><td>45"</td><td>1314</td></tr><tr><td>55"</td><td>3</td></tr><tr><td>65"</td><td>1</td></tr><tr><td>75"</td><td>0</td></tr><tr><td>85"</td><td>0</td></tr><tr><td>90°</td><td>0</td></tr></table>	0°	657°	0"	1060	5"	2405	15"	2810	25"	2778	35"	2614	45"	1314	55"	3	65"	1	75"	0	85"	0	90°	0
0°	47°																																																																																																		
0"	128																																																																																																		
5"	2217																																																																																																		
15"	17308																																																																																																		
25"	18237																																																																																																		
35"	2408																																																																																																		
45"	86																																																																																																		
55"	2																																																																																																		
65"	0																																																																																																		
75"	0																																																																																																		
85"	0																																																																																																		
90°	0																																																																																																		
0°	129°																																																																																																		
0"	299																																																																																																		
5"	4488																																																																																																		
15"	10601																																																																																																		
25"	10537																																																																																																		
35"	4396																																																																																																		
45"	159																																																																																																		
55"	1																																																																																																		
65"	0																																																																																																		
75"	0																																																																																																		
85"	0																																																																																																		
90°	0																																																																																																		
0°	683°																																																																																																		
0"	1462																																																																																																		
5"	3979																																																																																																		
15"	5883																																																																																																		
25"	6038																																																																																																		
35"	4406																																																																																																		
45"	1332																																																																																																		
55"	2																																																																																																		
65"	0																																																																																																		
75"	0																																																																																																		
85"	0																																																																																																		
90°	0																																																																																																		
0°	657°																																																																																																		
0"	1060																																																																																																		
5"	2405																																																																																																		
15"	2810																																																																																																		
25"	2778																																																																																																		
35"	2614																																																																																																		
45"	1314																																																																																																		
55"	3																																																																																																		
65"	1																																																																																																		
75"	0																																																																																																		
85"	0																																																																																																		
90°	0																																																																																																		

Measured 30LM 30K 80 CRI																	
		Horizontal Aiming Angles							Vertical Aiming Angles								
Beam Spread	CBCP	0°				30°			30°					45°			
		MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W
	23854	6	663	1.6	1.6	430	2.2	1.9	3	331	5.2	3.5	1.6	937	3.0	1.7	1.2
		8	373	2.2	2.2	242	2.9	2.5	4	186	6.9	4.6	2.2	527	4.0	2.2	1.5
		10	239	2.7	2.7	155	3.7	3.2	5	119	8.7	5.8	2.7	337	5.0	2.8	1.9
		12	166	3.3	3.3	108	4.4	3.8	6	83	10.4	7.0	3.3	234	6.0	3.4	2.3
		14	122	3.8	3.8	79	5.1	4.4	7	61	12.1	8.1	3.8	172	7.0	3.9	2.7
	11446	4	715	1.9	1.9	465	2.6	2.2	2	358	3.5	4.6	1.9	1012	2.0	2.0	1.4
		6	318	2.9	2.9	207	3.9	3.3	3	159	5.2	6.9	2.9	450	3.0	3.0	2.0
		8	179	3.8	3.8	116	5.2	4.4	4	89	6.9	9.2	3.8	253	4.0	4.1	2.7
		10	114	4.8	4.8	74	6.5	5.5	5	57	8.7	11.5	4.8	162	5.0	5.1	3.4
		12	79	5.7	5.7	52	7.8	6.6	6	40	10.4	13.9	5.7	112	6.0	6.1	4.1
	6174	4	386	2.7	2.7	251	3.7	3.1	2	193	3.5	8.2	2.7	546	2.0	3.0	1.9
		6	172	4.0	4.0	111	5.6	4.7	3	86	5.2	12.2	4.0	243	3.0	4.6	2.9
		8	96	5.4	5.4	63	7.5	6.2	4	48	6.9	16.3	5.4	136	4.0	6.1	3.8
		10	62	6.7	6.7	40	9.3	7.8	5	31	8.7	20.4	6.7	87	5.0	7.6	4.8
		12	43	8.1	8.1	28	11.2	9.3	6	21	10.4	24.5	8.1	61	6.0	9.1	5.7
	2810	4	176	3.5	3.5	114	4.9	4.0	2	88	3.5	15.7	3.5	248	2.0	4.2	2.4
		6	78	5.2	5.2	51	7.4	6.0	3	39	5.2	23.5	5.2	110	3.0	6.4	3.7
		8	44	6.9	6.9	29	9.8	8.0	4	22	6.9	31.3	6.9	62	4.0	8.5	4.9
		10	28	8.6	8.6	18	12.3	10.0	5	14	8.7	39.2	8.6	40	5.0	10.6	6.1
		12	20	10.4	10.4	13	14.7	12.0	6	10	10.4	47.0	10.4	28	6.0	12.7	7.3

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).

CBCP • Centerbeam candlepower FC • Footcandles at beam center (aim point)

LUMEN | CBCP MULTIPLIERS



CCT	80+ CRI	90+ CRI	95+ CRI
2700K	1.00	0.86	0.65
3000K	1.00	0.88	0.69
3500K	1.05	-	-
4000K	1.07	-	-



PHOTOMETRICS (@ 30° TILT) - 3SQAPIN

Tested in accordance to IESNA LM79

12 Degree Beam	24 Degree Beam	35 Degree Beam	50 Degree Beam																																																																																																
AX3SQ G4 30LM 30K 80CRI 12D EZ1 MVOLT + 3SQAPIN BS 3000K LEDs, input watts: 32.9, delivered lumens: 1528, LM/W = 46.4, test no. PT03181203	AX3SQ G4 30LM 30K 80CRI 24D EZ1 MVOLT + 3SQAPIN BS 3000K LEDs, input watts: 32.9, delivered lumens: 1792, LM/W = 54.5, test no. PT03182103	AX3SQ G4 30LM 30K 80CRI 35D EZ1 MVOLT + 3SQAPIN BS 3000K LEDs, input watts: 32.9, delivered lumens: 1898, LM/W = 57.7, test no. PT03182109	AX3SQ G4 30LM 30K 80CRI 50D EZ1 MVOLT + 3SQAPIN BS 3000K LEDs, input watts: 32.9, delivered lumens: 1087, LM/W = 33.0, test no. PT03182115																																																																																																
CP Summary <table><thead><tr><th></th><th>0°</th></tr></thead><tbody><tr><td>0°</td><td>18</td></tr><tr><td>5°</td><td>92</td></tr><tr><td>15°</td><td>1880</td></tr><tr><td>25°</td><td>15417</td></tr><tr><td>35°</td><td>12727</td></tr><tr><td>45°</td><td>322</td></tr><tr><td>55°</td><td>7</td></tr><tr><td>65°</td><td>0</td></tr><tr><td>75°</td><td>0</td></tr><tr><td>85°</td><td>0</td></tr><tr><td>90°</td><td>0</td></tr></tbody></table>		0°	0°	18	5°	92	15°	1880	25°	15417	35°	12727	45°	322	55°	7	65°	0	75°	0	85°	0	90°	0	CP Summary <table><thead><tr><th></th><th>0°</th></tr></thead><tbody><tr><td>0°</td><td>74</td></tr><tr><td>5°</td><td>132</td></tr><tr><td>15°</td><td>3967</td></tr><tr><td>25°</td><td>10582</td></tr><tr><td>35°</td><td>8387</td></tr><tr><td>45°</td><td>2352</td></tr><tr><td>55°</td><td>7</td></tr><tr><td>65°</td><td>0</td></tr><tr><td>75°</td><td>0</td></tr><tr><td>85°</td><td>0</td></tr><tr><td>90°</td><td>0</td></tr></tbody></table>		0°	0°	74	5°	132	15°	3967	25°	10582	35°	8387	45°	2352	55°	7	65°	0	75°	0	85°	0	90°	0	CP Summary <table><thead><tr><th></th><th>0°</th></tr></thead><tbody><tr><td>0°</td><td>607</td></tr><tr><td>5°</td><td>1341</td></tr><tr><td>15°</td><td>3409</td></tr><tr><td>25°</td><td>5880</td></tr><tr><td>35°</td><td>5437</td></tr><tr><td>45°</td><td>2478</td></tr><tr><td>55°</td><td>150</td></tr><tr><td>65°</td><td>1</td></tr><tr><td>75°</td><td>0</td></tr><tr><td>85°</td><td>0</td></tr><tr><td>90°</td><td>0</td></tr></tbody></table>		0°	0°	607	5°	1341	15°	3409	25°	5880	35°	5437	45°	2478	55°	150	65°	1	75°	0	85°	0	90°	0	CP Summary <table><thead><tr><th></th><th>0°</th></tr></thead><tbody><tr><td>0°</td><td>103</td></tr><tr><td>5°</td><td>651</td></tr><tr><td>15°</td><td>2079</td></tr><tr><td>25°</td><td>2830</td></tr><tr><td>35°</td><td>2707</td></tr><tr><td>45°</td><td>1554</td></tr><tr><td>55°</td><td>7</td></tr><tr><td>65°</td><td>0</td></tr><tr><td>75°</td><td>0</td></tr><tr><td>85°</td><td>0</td></tr><tr><td>90°</td><td>0</td></tr></tbody></table>		0°	0°	103	5°	651	15°	2079	25°	2830	35°	2707	45°	1554	55°	7	65°	0	75°	0	85°	0	90°	0
	0°																																																																																																		
0°	18																																																																																																		
5°	92																																																																																																		
15°	1880																																																																																																		
25°	15417																																																																																																		
35°	12727																																																																																																		
45°	322																																																																																																		
55°	7																																																																																																		
65°	0																																																																																																		
75°	0																																																																																																		
85°	0																																																																																																		
90°	0																																																																																																		
	0°																																																																																																		
0°	74																																																																																																		
5°	132																																																																																																		
15°	3967																																																																																																		
25°	10582																																																																																																		
35°	8387																																																																																																		
45°	2352																																																																																																		
55°	7																																																																																																		
65°	0																																																																																																		
75°	0																																																																																																		
85°	0																																																																																																		
90°	0																																																																																																		
	0°																																																																																																		
0°	607																																																																																																		
5°	1341																																																																																																		
15°	3409																																																																																																		
25°	5880																																																																																																		
35°	5437																																																																																																		
45°	2478																																																																																																		
55°	150																																																																																																		
65°	1																																																																																																		
75°	0																																																																																																		
85°	0																																																																																																		
90°	0																																																																																																		
	0°																																																																																																		
0°	103																																																																																																		
5°	651																																																																																																		
15°	2079																																																																																																		
25°	2830																																																																																																		
35°	2707																																																																																																		
45°	1554																																																																																																		
55°	7																																																																																																		
65°	0																																																																																																		
75°	0																																																																																																		
85°	0																																																																																																		
90°	0																																																																																																		

Measured 30LM 30K 80 CRI		FOR HORIZONTAL AIMING ANGLES 							FOR VERTICAL AIMING ANGLES 								
Beam Spread	CBCP	0°				30°			30°					45°			
		MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W
12D 	23854	6	663	1.6	1.6	430	2.2	1.9	3	331	5.2	3.5	1.6	937	3	1.7	1.2
		8	373	2.2	2.2	242	2.9	2.5	4	186	6.9	4.6	2.2	527	4	2.2	1.5
		10	239	2.7	2.7	155	3.7	3.2	5	119	8.7	5.8	2.7	337	5	2.8	1.9
		12	166	3.3	3.3	108	4.4	3.8	6	83	10.4	7	3.3	234	6	3.4	2.3
		14	122	3.8	3.8	79	5.1	4.4	7	61	12.1	8.1	3.8	172	7	3.9	2.7
24D 	11446	4	715	1.9	1.9	465	2.6	2.2	2	358	3.5	4.6	1.9	1012	2	2	1.4
		6	318	2.9	2.9	207	3.9	3.3	3	159	5.2	6.9	2.9	450	3	3	2
		8	179	3.8	3.8	116	5.2	4.4	4	89	6.9	9.2	3.8	253	4	4.1	2.7
		10	114	4.8	4.8	74	6.5	5.5	5	57	8.7	11.5	4.8	162	5	5.1	3.4
		12	79	5.7	5.7	52	7.8	6.6	6	40	10.4	13.9	5.7	112	6	6.1	4.1
35D 	6174	4	386	2.7	2.7	251	3.7	3.1	2	193	3.5	8.2	2.7	546	2	3	1.9
		6	172	4	4	111	5.6	4.7	3	86	5.2	12.2	4	243	3	4.6	2.9
		8	96	5.4	5.4	63	7.5	6.2	4	48	6.9	16.3	5.4	136	4	6.1	3.8
		10	62	6.7	6.7	40	9.3	7.8	5	31	8.7	20.4	6.7	87	5	7.6	4.8
		12	43	8.1	8.1	28	11.2	9.3	6	21	10.4	24.5	8.1	61	6	9.1	5.7
50D 	2810	4	176	3.5	3.5	114	4.9	4	2	88	3.5	15.7	3.5	248	2	4.2	2.4
		6	78	5.2	5.2	51	7.4	6	3	39	5.2	23.5	5.2	110	3	6.4	3.7
		8	44	6.9	6.9	29	9.8	8	4	22	6.9	31.3	6.9	62	4	8.5	4.9
		10	28	8.6	8.6	18	12.3	10	5	14	8.7	39.2	8.6	40	5	10.6	6.1
		12	20	10.4	10.4	13	14.7	12	6	10	10.4	47	10.4	28	6	12.7	7.3

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).

CBCP • Centerbeam candlepower FC • Footcandles at beam center (aim point)

DIMMER COMPATIBILITY

Phase Dimming (FPC) - Incandescent, Magnetic Low Voltage and Electronic Low Voltage Dimming

- Dimming range of 100% down to as low as 1% a minimum load of one fixture
- Dimming range and maximum rated load vary depending on dimmer type and model. See maximum load calculations below to identify max number of luminaires per dimmer.

Incandescent (INC) and Magnetic Low Voltage (MLV)

Example: Fixture Rating = 13W; Dimmer Rating = 600W

Equivalent Incandescent Load (EIL) = 50%

$(600/13W) \times 0.5 = 23$ Fixtures per Dimmer

Electronic Low Voltage (ELV)

Example: Fixture Rating = 13W; Dimmer Rating = 600W

Equivalent Incandescent Load (EIL) = 75%

$(600/13W) \times 0.75 = 34$ Fixtures per Dimmer

INCANDESCENT, MLV, ELV WALL DIMMERS

Static White

Manf.	Product Family	Series	Type	Min Light(%)
Lutron	Glyder	GLV*	MLV	2
Leviton	SureSlide	6633*	INC	2
Lutron	Diva	DVLV	MLV	6
Lutron	Diva	DV*	INC	2
Lutron	Skylark	SLV*	MLV	3
Lutron	RadioRA 2	RRD-6D*	INC	2
Lutron	RadioRA 2	RRD-10ND*	INC	2
Leviton	SureSlide	6613	MLV	5
Leviton	IllumaTech	IPL06-10Z*	INC	3
Lutron	Diva	DVCL	INC	3
Insteon	Keypad Dimmer	2334-232	INC	2
Insteon	Dimmer Switch	2477D*	INC	2
Control4	Forward Phase Dimmer	C4-FPD 120	INC	2
Lutron	Nova	NTELV	ELV	6
Lutron	Diva	DVELV*	ELV	2
Lutron	Lutron Maestro	MAELV*	ELV	5
Leviton	Vizia	VPE06-1LX	ELV	2
Leviton	Illumatech	IPE04*	ELV	5
Lutron	Lutron RadioRA2	RRD-6NA	PHA	2
Control4	Adaptive Phase Dimmer	C4-APD 120	PHA	2
Lutron	RadioRA2	RRD-6NA*	PHA	2
Control4	Adaptive Phase Dimmer	C4-APD 120	PHA	2

INTEGRATED CONTROL SYSTEMS

Static White

Manf.	Product Family	Series	Type	Min Light(%)
Lutron	LP	LP-RPM-4U	INC	5
Lutron	LP	LP-RPM-4A*	PHA	2
Lutron	GrafikEye QS	QSGRJ-3P	PHA	2
Lutron	GrafikEye QS	PHPM-PA-120	PHA	2
Lutron	HomeWorks QS	PHPM-PA-120	PHA	2
Lutron	HomeWorks QS	HW-RPM-4A*	PHA	2
Acuity	nLight nSP5PCD ELV	nSP5PCD*	ELV	4
Insteon	Micro Module Dimmer	2442-222*	INC	2
Control4	8 Ch Dimmer	C4-DIN-8DIM-E	PHA	2

*: Aculux recommended dimmers

WarmDim®

Manf.	Product Family	Series	Type	Min Light(%)
Sensor Switch	WPD	WPD*	INC	1
Leviton	Illmatech	IPM06-1LZ	MLV	3
Leviton	Illmatech	IPI06-1LZ	INC	2
Lutron	Diva	DVCL	INC	1
Leviton	SureSlide	6633*	INC	1
Leviton	SureSlide	6613*	MLV	1
Leviton	SureSlide	IPL06	INC	1
Control4	Forward phase dimmer	C4-FPD 120 FWD*	INC	1
Lutron	Diva	DVELV*	ELV	1
Lutron	Maestro	MAELV*	ELV	1
Lutron	Vive	MRF25-6ELV*	ELV	1
Lutron	Caseta	PD-5NE*	ELV	1
Leviton	Illumatech	IPE04	ELV	4
Lutron	Maestro	RRD-PRO REV	PHA	1
Control4	Phase Adaptive Dimmer	C4-APD 120*	PHA	1
Lutron	Maestro	RRD-PRO FWD*	PHA	1

WarmDim®

Manf.	Product Family	Series	Type	Min Light(%)
Acuity	nLight nSP5PCD ELV	nSP5PCD ELV*	ELV	1
Acuity	nLight nSP5PCD ELV	PCDM*	ELV	1
Acuity	Fresco LMPM	LMPM 2D 2L*	PHA	1
Lutron	LP	LP-RPM-4A *	PHA	1
Lutron	LP	LP-RPM-4U*	INC	1
Lutron	GrafikEye QS	Lutron PHPM-PA-120*	PHA	1
Lutron	GrafikEye QS	Lutron Grafik Eye QSGRJ-3P*	MLV	1
Lutron	HomeWorks QS	PHPM-PA-120*	PHA	1
Lutron	HomeWorks QS	HW-RPM-4A*	PHA	1
Legrand	Wattstopper	LMRC-221-U*	PHA	1
Control4	8 Ch Dimmer	C4-DIN-8DIM-E*	PHA	1
Crestron	Phase Adaptive Dimmer	6501748*	PHA	1



Static White, WarmDim®  & Tunable White 

0-10V Dimming (GZ1, EZ1, EZB drivers)

WALL DIMMERS

Manf.	Product Family	Series	Type	-EZ1/-GZ1 Min. Light (%)	-EZB Min. Light (%)
Lutron	Diva	DVTV	0-10V	1	<1
Lutron	Nova	NFTV	0-10V	1	<1
Lutron	Nova T	NTFTV	0-10V	1	<1

INTEGRATED CONTROL SYSTEMS

Manf.	Product Family	Series	Type	-EZ1/-GZ1 Min. Light (%)	-EZB Min. Light (%)
Lutron	GrafikEye QS	GRX-TVI*	0-10V	1	<1
Lutron	HomeWorks QS	GRX-TVI*	0-10V	1	<1
Lutron	HomeWorks QS	GRX-TVM2*	0-10V	1	<1
Lutron	LCP128	GRX-TVI*	0-10V	1	<1
Lutron	LCP128	GRX-TVM2*	0-10V	1	<1
Lutron	LP	GRX-TVM2*	0-10V	1	<1
Lutron	RadioRA2	LMJ-5T-DV-B	0-10V	1**	<1
Crestron	GreenLight	DIN-4DIMFLV4	0-10V	1	<1
Lutron	Energi Tripak	RMJ-5T-DV-B	0-10V	1	<1
Wattstopper	DLM	LMRC-211	0-10V	1	<1
Insteon	Ballast Dimmer	2475DA2	0-10V	1	<1

ELECTRICAL SPECIFICATIONS

Static White

LUMEN PACKAGE	06LM		08LM		12LM		15LM		20LM		25LM		30LM	
Voltage	120	277	120	277	120	277	120	277	120	277	120	277	120	277
Input Watts	12.0	13.0	7.0	7.6	11.0	12.0	13.8	14.6	19.7	20.2	25.8	26.3	32.9	33.3
Input Current	0.11	0.06	0.03	0.06	0.09	0.05	0.12	0.06	0.17	0.08	0.22	0.10	0.28	0.13
Frequency	50/60 Hz		50/60 Hz		50/60 Hz		50/60 Hz		50/60 Hz		50/60 Hz		50/60 Hz	
Power Factor	0.9 MIN.		0.9 MIN.		0.9 MIN.		0.9 MIN.		0.9 MIN.		0.9 MIN.		0.9 MIN.	

WarmDim

LUMEN PACKAGE	08LM		12LM		15LM	
Voltage	120	277	120	277	120	277
Input Watts	14.1	14.5	20.0	20.3	25.8	25.9
Input Current	0.12	0.05	0.17	0.08	0.22	0.10
Frequency	50/60 Hz		50/60 Hz		50/60 Hz	
Power Factor	0.9 MIN.		0.9 MIN.		0.9 MIN.	

Tunable White

LUMEN PACKAGE	08LM		12LM		15LM		20LM	
Voltage	120	277	120	277	120	277	120	277
Input Watts	12.1	12.8	18.4	18.9	21.1	21.6	31.0	31.0
Input Current	0.10	0.05	0.15	0.07	0.18	0.08	0.26	0.11
Frequency	50/60 Hz		50/60 Hz		50/60 Hz		50/60 Hz	
Power Factor	0.9 MIN.		0.9 MIN.		0.9 MIN.		0.9 MIN.	

*: Aculux recommended dimmers

** : Not tested with -GZ1

+: Requires a separate relay module to turn luminaire on/off