



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

Low Voltage Systems

12V AC LED-COMPATIBLE CLASS 2 ELECTRONIC DRIVER/TRANSFORMER

TL602E

PRODUCT SPECIFICATIONS

Description

TL602E-10: 12V-10VA Class 2 electronic Driver/Transformer

- IC rated for recessed applications and can be buried in insulation • Rated for 0.5-10 watts total load • 120VAC input
- Ideally suited for driving Juno Mini LED Downlight/Gimbal and Solo-Task fixtures • May also be used to operate other low wattage LED or incandescent loads.

TL602E-25: 12V-25VA Class 2 electronic Driver/Transformer

- IC rated for recessed applications and can be buried in insulation • Rated for 0.5-25 watts total load • 120VAC input
- Ideally suited for driving Juno Mini LED Downlight/Gimbal and Solo-Task fixtures • May also be used to operate other low wattage LED or incandescent loads.

TL602E-60: 12V-60VA Class 2 electronic Driver/Transformer

- IC rated for recessed applications and can be buried in insulation
- Rated for 0.5-60 watts total load • 120VAC input • Ideally suited for driving Juno Mini LED Downlight/Gimbal and Solo-Task fixtures • May also be used to operate other low wattage LED or incandescent loads.

Note: Other TL602E driver/transformer wattages up to 60W are available via special order — consult factory for pricing and availability.

Construction 18 gauge die formed steel housing • Low-profile, 1" overall height • Available in standard direct-wire and optional 6' 3-wire cord & plug version • Terminal block provided for direct wire inputs accepts 18-12 AWG • All versions provided with terminal block on output side for quick and secure fixture wiring (Type CL2 or NEC equivalent 18-12 AWG) • Direct-wire versions supplied with die-cast fitting for $\frac{3}{8}$ " flexible metal conduit • White polyester powder coat paint finish.

Dimming May be dimmed using only dimmers that have been tested and qualified by Juno for use with Juno LED fixtures; reference the following pages for dimmer compatibility • Consult factory to confirm compatibility of other dimmers prior to installation with Juno LED fixtures.

Installation Transformer should be located within 4' of first fixture in run • To avoid excessive voltage drop in light output, make sure the fixture voltage at the last fixture is at least 10 volts • Fully loaded run lengths longer than 18' with 12 AWG is not recommended due to voltage drop • Terminal block wiring connections for simpler, faster installation • Provision for ground wire attachment • Two $\frac{1}{2}$ " #6 wood screws provided for mounting to wood surfaces • IC rated for use in insulated or non-insulated applications.

Labels cULus Listed for use in the U.S. (UL 2108) and Canada (CSA C22.2 No. 250.0) • Suitable for damp locations.


Product specifications subject to change without notice.

PRODUCT CODES

Catalog Number	Finish	Description
TL602E-10-WH	White	10W 12V AC Electronic Driver/Transformer
TL602E-25-WH	White	25W 12V AC Electronic Driver/Transformer
TL602E-60-WH	White	60W 12V AC Electronic Driver/Transformer



DIMENSIONS

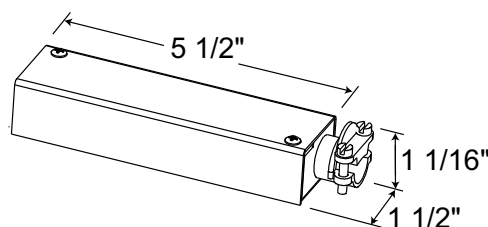

Note: Fully loaded run lengths longer than 18' with 12 AWG is not recommended due to voltage drop.

ENGINEERING DATA

	TL602E-10	TL602E-25	TL602E-60
Input Voltage	120VAC	120VAC	120VAC
Input Current Typ.	0.11A	0.29A	0.56A
Nominal Output	11.7V	11.6V	11.5V
Max. Load	10 Watts (VA)	25 Watts (VA)	60 Watts (VA)
Operating Frequency	>20kHz	>20kHz	>20kHz
Power Factor	>.90	>.90	>.90
T.H.D.	<30%	<30%	<30%

OPTIONS (Add as suffix to catalog number)

Catalog Number	Description
-CP6 *	6ft. Cord & Plug, factory installed

Ordering Example: TL602E-60-WH-CP6

*Note: Not UL Listed

12V AC LED-COMPATIBLE CLASS 2 ELECTRONIC DRIVER/TRANSFORMER

TL602E

APPLICATION

Consideration	12V Electronic Driver/Transformer	12V Magnetic Transformer
• Length	• Use for short to medium fixture run lengths and low to medium wattage systems	• Use for medium to long run lengths and medium to higher wattage systems
• Dimming	• For optimal results, use dimmers specifically designed for use with electronic transformers; transformers used with Juno LED fixtures should only be operated with dimmers pre-qualified for suitability by Juno Lighting Group	• For optimal results, use dimmers specifically designed for use with magnetic transformers; transformers used with Juno LED fixtures should only be operated with dimmers pre-qualified for suitability by Juno Lighting Group
• Transformer Location	• For best performance, transformer should be located close to fixture run. • Can be surface mounted or installed in insulation. • Install where ambient temperature will not exceed 120°F (50°C); transformer must be accessible	• Install in well ventilated locations where ambient temperature will not exceed 140°F (60°C); transformer must be accessible
• Distance to First Fixture	• For best results, should be mounted within 4' to first fixture in run.	• Suitable for remote mounting at long distances

MINI DOWNLIGHT/GIMBAL-TABLE PREDICTING VOLTAGE AT FIXTURE FOR VARIOUS WIRE LENGTHS, GAUGES AND LOADS

TL602E 60W, 12V AC Electronic Transformer, 120V Input, when used with 5W Mini Downlight/Gimbal fixtures

Distance from Transformer to First Fixture	#12 Gauge				#14 Gauge				#18 Gauge			
	Number of Fixtures				Number of Fixtures				Number of Fixtures			
	1	4	7	10	1	4	7	10	1	4	7	10
1'	12.0	11.7	11.2	10.4	12.0	11.7	11.2	10.3	12.0	11.6	11.1	10.1
2'	12.0	11.6	11.2	10.3	12.0	11.6	11.1	10.2	12.0	11.5	10.9	9.7
4'	12.0	11.6	11.1	10.1	12.0	11.5	10.9	9.8	12.0	11.3	10.7	9.3
6'	12.0	11.6	11.0	9.8	12.0	11.5	10.8	9.4	12.0	11.4	10.5	8.9
8'	12.0	11.4	10.8	9.4	12.0	11.4	10.6	9.0	12.0	11.3	10.2	8.6
10'	12.0	11.5	10.7	9.1	12.0	11.3	10.3	8.7	12.0	11.2	9.9	8.5
12'	12.0	11.4	10.4	8.8	12.0	11.2	10.0	8.6	12.0	11.1	9.6	8.5
14'	12.0	11.3	10.1	8.6	11.9	11.1	9.7	8.5	11.9	10.9	9.2	8.4
16'	11.9	11.1	9.7	8.5	11.9	11.0	9.4	8.4	11.9	10.8	8.9	8.3
18'	11.9	10.9	9.4	8.4	11.9	10.9	9.1	8.4	11.8	10.6	8.7	8.3
20'	11.9	10.9	9.2	8.4	11.9	10.7	8.8	8.3	11.8	10.5	8.6	8.2

Notes:

1. Max 10 fixtures
2. For this analysis, 18" of wire was used between fixtures

The shaded areas represent the suggested operating range of 10.0 to 12.0 volts at the fixture using the TL602E transformer. Do not exceed 12 volts. To ensure less than a 20% drop in light output between the first and last fixture in a run, make sure the fixture voltage at the last fixture is at least 10 volts. Fully loaded, run lengths longer than 18' with 12AWG and transformer remote mounting more than 4' from the first fixture are not recommended due to voltage drop. A voltmeter with high frequency response (such as a Fluke 187 multimeter) should be used to confirm that the proper voltage is present.

MINI DOWNLIGHT/GIMBAL DIMMER COMPATIBILITY

May be dimmed using the following Juno qualified dimmers: Leviton® Acenti Ace-06-1L, Lutron® Diva DVELV-300P, Lutron® Nova T²NTELV 300, Lutron® Skylark SELV-300P, Lutron® Spacer SPSELV-600.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
 220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
 Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2011 Juno Lighting, LLC.

Low Voltage Systems

12V AC LED-COMPATIBLE CLASS 2 ELECTRONIC DRIVER/TRANSFORMER

TL602E

SOLO-TASK-TABLE PREDICTING FIXTURE VOLTAGE FOR VARIOUS WIRE LENGTHS, GAUGES AND LOADS

TL602E 60W, 12V AC Electronic Transformer, 120V Input, when used with 3.5W Solo-Task fixtures

Distance from Transformer to First Fixture	#14 Gauge				#18 Gauge			
	Number of Fixtures				Number of Fixtures			
	1	4	9	14	1	4	9	14
1'	12.0	11.8	11.3	10.3	12.0	11.7	11.2	10.1
2'	12.0	11.7	11.2	10.2	12.0	11.6	11.0	9.7
4'	12.0	11.7	11.1	9.8	12.0	11.5	10.8	9.3
6'	12.0	11.6	11.0	9.4	12.0	11.4	10.6	8.9
8'	12.0	11.6	10.9	9.0	12.0	11.3	10.4	8.6
10'	12.0	11.5	10.8	8.7	12.0	11.3	10.1	8.5
12'	12.0	11.4	10.6	8.6	12.0	11.2	9.8	8.5
14'	12.0	11.3	10.4	8.5	11.9	11.1	9.5	8.4
16'	12.0	11.2	10.1	8.4	11.9	11.0	9.2	8.3
18'	11.9	11.1	9.8	8.4	11.9	10.9	8.9	8.3
20'	11.9	11.0	9.5	8.3	11.9	10.7	8.6	8.2

Notes:

1. Max 14 fixtures
2. For this analysis, 18" of wire was used between fixtures

The shaded areas represent the suggested operating range of 10.0 to 12.0 volts at the fixture using the TL602E transformer. Do not exceed 12 volts. To ensure less than a 20% drop in light output between the first and last fixture in a run, make sure the fixture voltage at the last fixture is at least 10 volts. Fully loaded, run lengths longer than 18' with 12AWG and transformer remote mounting more than 4' from the first fixture are not recommended due to voltage drop. A voltmeter with high frequency response (such as a Fluke 187 multimeter) should be used to confirm that the proper voltage is present.

SOLO-TASK DIMMER COMBATIBILITY

May be dimmed using the following Juno qualified dimmers: Leviton® Illumatech IPE04, Lutron® Diva DVELV-300P, Lutron® Nova T☆NTELV 300, Lutron® Skylark SELV-300P, Lutron® Spacer SPSELV-600, Lutron® Maestro MAELV-600.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
 220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
 Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2011 Juno Lighting, LLC.