



Bus Drops and Safety Springs

Amtec bus drop grips are made of high strength galvanized steel strand. Stainless is available upon request. Amtec bus drop grips are easily installed and absorb tension, vibration and pull with no damage. They support flexible cord or bus drop cable at bus duct or industrial areas. Single eye can be used with springs by disassembling draw bar from coil, placing through eye and replacing draw bar. Hook eyes available please consult factory.

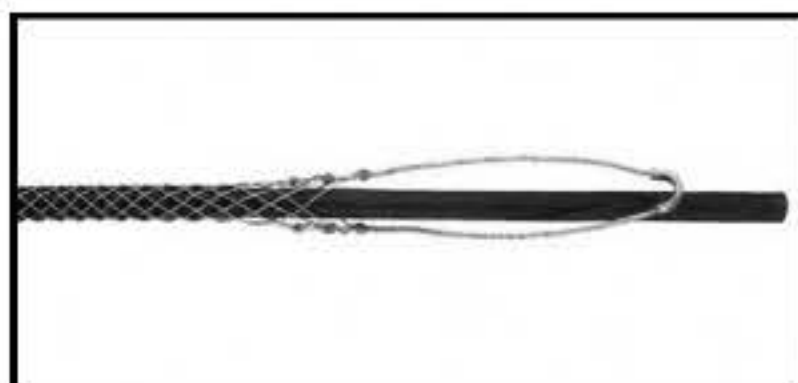


Single Eye, Wide Range Bus Drop

Part Number	Dia. Ra.	Description	Approx. Breaking Strength	Eye Length	Mesh Length
7304-001	.22-.32	BD-022	350 LBS.	3	3 1/2**
7304-002	.30-.43	BD-030	450 LBS.	4	4
7304-003	.41-.56	BD-041	550 LBS.	6	4 3/4
7304-004	.53-.73	BD-053	1000 LBS.	7	6
7304-005	.70-.85	BD-070	1400 LBS.	7	6 3/4
7304-006	.82-1.00	BD-082	1400 LBS.	8	8
7304-007	.96-1.25	BD-096	1500 LBS.	9	9 1/2
7304-008	1.25-1.50	BD-125	1800 LBS.	10	12 1/2**

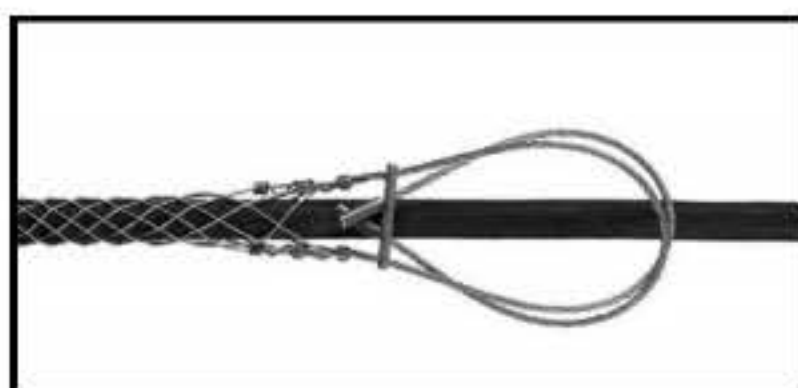

Universal Bale, Wide Range Bus Drop

Part Number	Dia. Ra.	Description	Approx. Breaking Strength	Eye Length	Mesh Length
7304-009	.22-.32	BD-022-UB	350 LBS.	9	3 1/2**
7304-010	.30-.43	BD-030-UB	450 LBS.	10	4
7304-011	.41-.56	BD-041-UB	550 LBS.	12	4 3/4
7304-012	.53-.73	BD-053-UB	1000 LBS.	13	6
7304-013	.70-.85	BD-070-UB	1400 LBS.	13	6 3/4
7304-014	.82-1.00	BD-082-UB	1400 LBS.	14	8
7304-015	.96-1.25	BD-096-UB	1500 LBS.	15	9 1/2

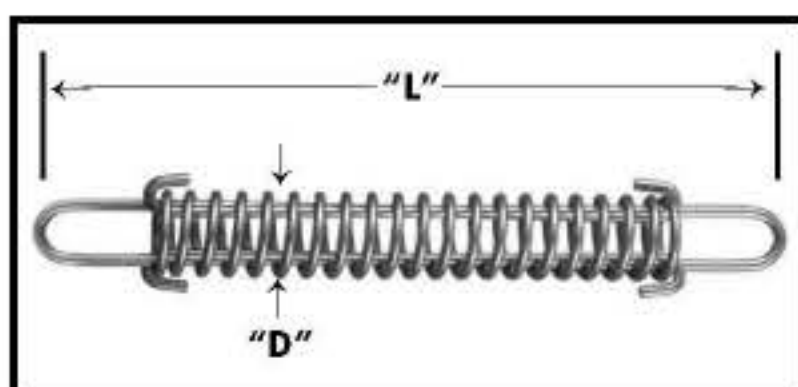

Bus Drop Safety Springs

Part Number	Maximum Deflection	Description	Approx. Breaking Strength	Length (No Load) L D
203-02-001	2 1/8 @40 LBS.	40 LB. Spring	600 LBS.	8 1/4 3/4
203-02-002	3 1/8 @80 LBS.	80 LB. Spring	850 LBS.	8 1/4 1

Lengths at Nominal Diameter (Inches)

* Dim with Bale Fully Extended

** Not UL Listed