


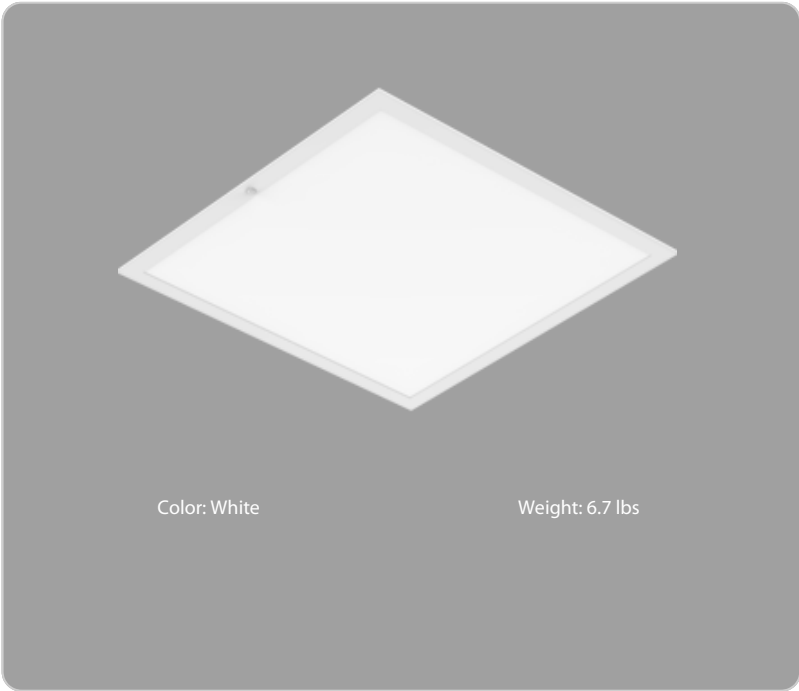

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

| Driver Info |                  | LED Info       |                  |
|-------------|------------------|----------------|------------------|
| Type        | Constant Current | Watts          | 40W              |
| 120V        | 0.33A            | Color Temp     | 2700-6500K       |
| 208V        | 0.19A            | Color Accuracy | 80-86 CRI        |
| 240V        | 0.17A            | L70 Lifespan   | N/A              |
| 277V        | 0.14A            | Lumens         | 4,600-4,981 lm   |
| Input Watts | 41-42.7W         | Efficacy       | 112.2-116.7 lm/W |

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:  
40W/30W/25W (factory default: 40W)  
Color Temperature Selectable:  
3500K, 4000K and 5000K (factory default:4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Electrical

Driver:

Constant Current, Class II, 120-277V, 50/60 Hz:  
40W: 120V: 0.33A, 208V: 0.19A, 240V: 0.17A, 277V: 0.14A  
30W: 120V: 0.25A, 208V: 0.14A, 240V: 0.13A, 277V: 0.11A  
25W: 120V: 0.21A, 208V: 0.12A 240V: 0.10A, 277V: 0.09A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

2.64% at 120V, 8.15% at 277V

Power Factor:

99.6% at 120V, 93.2% at 277V

Aux Power Supply:

No

Dim to Off:

Yes

Surge Protection:

2 kV + 4 kV

Construction

Cold Weather Starting:

The minimum starting temperature is -22°F (-30°C)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

IC Rated:

Suitable for direct contact with insulation

Lens:

Precision engineered polystyrene diffuser provides high uniformity, and reduced glare. No visible diodes, hot-spots, or shadows.

Housing:

Aluminum+Iron

Reflector:

TPET reflective paper

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Installation

Mounting:

Surface, suspended & recessed mounting. The mounting accessories sold separately.

Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

## Technical Specifications (continued)

### Color Stability:

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### Lightcloud

#### Lightcloud Blue:

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA (Interior);  
NHCZ2BIA17L (Exterior)

Learn more at [www.lightcloud.com](http://www.lightcloud.com).

#### Gateway Required:

No

#### Communication Protocol:

Bluetooth Mesh

#### Range:

Up to 60 feet between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction. Up to 200 feet clear line of sight (varies by device).

#### Spacing Criteria:

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

### Factory Reset:

Method 1: Delete from App

Open the app and access the device settings for the paired device. Be sure that the device is online and select 'Delete'. The device will flash on/off 5 times and return to full brightness.

Method 2: Manual

Power the device off and on 5x consecutively. Do not allow less than 4s to elapse from switching off to on. Do not allow more than 2s to elapse from switching on to off. The device will flash 3x, then reset to 100% brightness at default CCT.

Method 3: Rapid Reset Tool

The Rapid Reset process must be done by a professional electrician qualified by RAB. Reach out to your RAB sales manager to request a Rapid Reset Tool. The tool simply needs to be placed directly on the back of the fixture for 2s or until the lamp/luminaire flashes 3x, then resets to 100% brightness at the default CCT.

### SmartShift

#### SmartShift:

SmartShift is the most advanced - yet easiest to use - circadian lighting system, which syncs white color tuning with the local sunrise and sunset. Requires the NANO/LCB (sold separately)

### Sensor Settings

#### Sensor Connection Type:

RJ09

#### Max Mounting Height:

9 ft

#### Detection Range:

20 ft diameter at 9 ft mounting height

#### Sensor Technology:

Microwave (MVS)

### Default Setting:

Uncommissioned State:

Motion Sensitivity: High

Brightness when triggered : 100%

Hold time: 20 minutes

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Daylight: Disabled

Commissioned State:

Once pair, the sensor will default to disabled. Once enabled the following settings apply:

Motion Sensitivity: High

Brightness when triggered: Last on status

Hold time: 20 minutes

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Daylight: Disabled

### Adjustable Sensor Settings?:

Yes, using the Lightcloud Blue mobile app

### Sensing Type:

Occupancy, Vacancy

### Occupied Actions:

On or On at a Dim Level

### Vacant Actions:

Off or On at a Dim Level

### Occupancy Timeout:

1 minute to 240 minutes

### Daylight Sensing:

Closed loop daylight harvesting with continuous dimming. Specify settings using the Lightcloud Blue mobile app.

### High/Low Dim Level:

The High Dim Level (HDL) is limited to 50%-70%


The Low Dim Level (LDL) is limited to 20%-70%

### Other

#### 5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

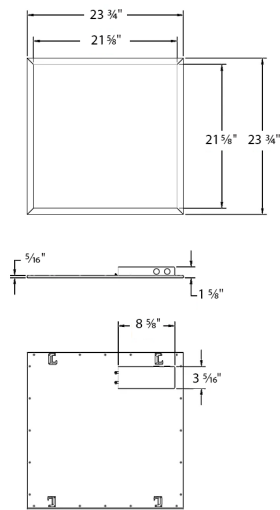

Features

- 100,000-hour LED Lifespan
- DLC Standard Listed
- 5-Year, No-Compromise Warranty

Ordering Matrix

| Family | Size          | Wattage         | Driver               | Color Temp                  | Options                                     | Output       |
|--------|---------------|-----------------|----------------------|-----------------------------|---------------------------------------------|--------------|
| EZP    | 2X2           |                 |                      |                             | /LCBS/MVS                                   |              |
|        | 2X2 = 2' x 2' | 2X4 = 50/40/30W | /D10 = 0-10V Dimming | Blank = 3500/4000/5000K CCT | /LCBS/MVS = Lightcloud Blue w/MVS Sensor    | Blank = High |
|        | 2X4 = 2' x 4' | 1X4 = 40/30/25W | Blank = 120-277V,    | Adjustable                  | /LCBS/MVS/E2 = Lightcloud Blue w/MVS        | Output       |
|        | 1X4 = 1' x 4' | 2X2 = 40/30/25W | 0-10V Dimming        | Tunable White 2700-6500K*   | Sensor and Battery Backup                   |              |
|        |               |                 |                      |                             | /LCBS/E2 = Lightcloud Blue w/PIR Sensor and |              |
|        |               |                 |                      |                             | Battery Backup                              |              |
|        |               |                 |                      |                             | /LCB/E2 = Lightcloud Blue and Battery       |              |
|        |               |                 |                      |                             | Backup                                      |              |
|        |               |                 |                      |                             | /E2 = Battery Backup                        |              |
|        |               |                 |                      |                             | /LCBS = Lightcloud Blue w/PIR Sensor        |              |
|        |               |                 |                      |                             | /LCB = Lightcloud Blue                      |              |
|        |               |                 |                      |                             | /LCS = Lightcloud Sensor                    |              |
|        |               |                 |                      |                             | /LC = Lightcloud                            |              |
|        |               |                 |                      |                             | Blank = No Option                           |              |