



# Antique Bronze Frame with Green Leaves Lens

Note: Fixture will come fully assembled with the frame and lens shown above.

Project:	Туре:
Prepared By:	Date:

Driver Info		LED Info	
Туре	Constant Current	Watts	14W
120V	0.12A	Color Temp	4000K (Neutral)
208V	0.07A	Color Accuracy	96 CRI
240V	0.06A	R9	85
277V	0.06A	L70 Lifespan	50,000 Hours
Input Watts	14W	Lumens	231 lm
		Efficacy	16.5 lm/W

# **Technical Specifications**

### Compliance

# UL Listed:

Suitable for damp locations. Recommended for indoor use only.

### **ADA Compliant:**

Meets ADA Requirements for wall-mounted luminaires.

### IESNA LM-79 &lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNAIm-79 and Im-80

### Performance

### Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to 60W Incandescent

### **LED Characteristics**

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

### **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### **Electrical**

#### Driver:

Constant Current, Class 2, 120-277VAC, 50/60Hz, 350mA or 640mA

### **Dimming Driver:**

0 - 10V (at 120-277V), TRIAC and ELV (at 120V only)

#### THD:

19.9% at 120V, 21.7% at 277V

### **Power Factor:**

96.4% at 120V, 85.6% at 277V

### **Battery Backup:**

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

### **Battery Backup Light Loss Factor:**

0.343

## Construction

### Housing:

Die-cast and extruded aluminum

### Mounting:

Wall mount with junction box included

#### Lens:

Acrylic lens with green leaves print. See <u>installation</u> <u>sheet</u> for cleaning instructions.

### **Operating Temperature:**

-20°C (-4°F) to 40°C (104°F)

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Finish:

Luxuriously Electroplated Antique Bronze

## Other

### Warrantv:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.



# **Technical Specifications (continued)**

## **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

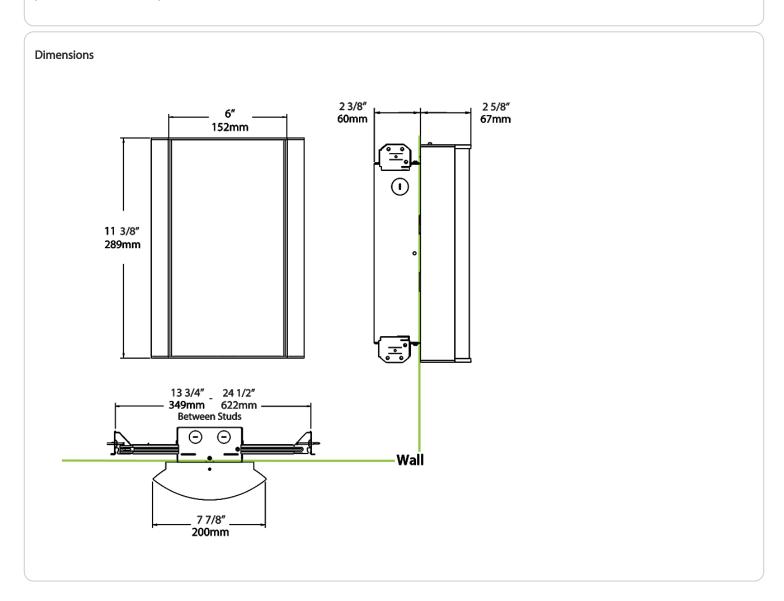



HALV 10L 940  10L = 1000lm / 14W 1 940 = 90CRI, 4000 935 = 90CRI, 3500 930 = 90CRI, 3000 927 = 90CRI, 2700	FG1 = Frosted with Grill Style #1	S = Silver A = Antique Bronze SA = Satin Nickel CU = Copper  MVS = Microwave Occupancy Sensor /BL = Bi-Level Control /LC = Lightcloud® Controller /MVS/E2 = Microwave Occupancy Sensor Battery Backup² /BL/E2 = Bi-Level Control w/ Battery Back
<b>18L</b> = 1800lm / 25W <sup>1</sup> <b>935</b> = 90CRI, 3500 <b>930</b> = 90CRI, 3000	FG1 = Frosted with Grill Style #1 FG2 = Frosted with Grill Style #2 FG3 = Frosted with Grill Style #3 NL = Natural Leaves	K = Black S = Silver A = Antique Bronze SA = Satin Nickel CU = Copper  K = Black /MVS = Microwave Occupancy Sensor /BL = Bi-Level Control /LC = Lightcloud® Controller /MVS/E2 = Microwave Occupancy Sensor Battery Backup² /BL/E2 = Bi-Level Control w/ Battery Back
	TL = Toffee Leaves LW = Linen Hampton White LS = Linen Stone LH = Linen Harbor MS = Metallic Spun Silver MC = Metallic Spun Copper MG = Metallic Spun Gold CW = Crush Polar White CS = Crush Sedona MP = Mirage Platinum MA = Mirage Bronze	<b>/LC/E2 =</b> Lightcloud® Controller w/ Batte Backup