



## Technical Specifications (continued)

### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Installation

#### Mounting:

Comes standard with V-hooks for chain mounting. Accessories available for pendant and surface mounting ([purchased separately](#)).

### Lightcloud

#### Lightcloud:

Lightcloud Blue is a Bluetooth mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patent-pending Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA

[Learn more at www.lightcloud.com](http://www.lightcloud.com)

#### Gateway Required:

No

#### Communication Protocol:

Bluetooth Mesh

#### Range:

Up to 60 ft between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction. Up to 200 ft clear line of sight (varies by device).

#### Spacing Criteria:

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

#### Factory Reset:

Method 1: Delete from App

Open the app and access the device settings for the paired device. Be sure that the device is online and select 'Delete'.

Method 2: Rapid Reset Tool

The Rapid Reset process must be done by a professional electrician qualified by RAB. Reach out to your RAB sales manager to request a Rapid Reset Tool. The tool simply needs to be placed directly on the side of the device for 2s or until the fixture flashes 3x, then resets to 100% brightness.

### Input Voltage:

12VDC

### Operating Frequency:

50/60Hz

### Input Current @ 12V (mA):

30mA

### Operating Temperature:

-40°F to 140°F (-20°C to 60°C)

### Dimming:

Yes, when connected to a compatible 0-10V driver

### Mounting Height:

40 ft

### Detection Range:

40 ft diameter mounted at 40 ft

### Sensor:

Passive Infrared (PIR)

### Default Setting:

Uncommissioned State:

Motion Sensitivity: High

Brightness when triggered: 100%

Hold time: 1 minute

Standby to dim: 20%

Standby time: 1 minute

When vacant: Off

Commissioned State:

Motion Sensitivity: High

Brightness when triggered: Last on status

Hold time: 20 minutes

When vacant: Off

### Occupied Actions:

On or On at a Dim Level

### Vacant Options:

Off or On at a Dim Level

### Occupancy Timeout:

1 minute to 240 minutes

### Daylight Sensing:

The sensor will determine to trigger the light(s) on or not based on the daylight threshold level set in the Lightcloud Blue mobile app.

### Environment:

Suitable for dry, damp, or wet environments in indoor applications

### IP Rating:

IP65

### Sensor Settings

#### Remote Control Accessory:

Adjust settings using remote control (catalog# MSR1). Only available with 0-10V dimming driver options. [Remote control available here](#).

### Other


#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

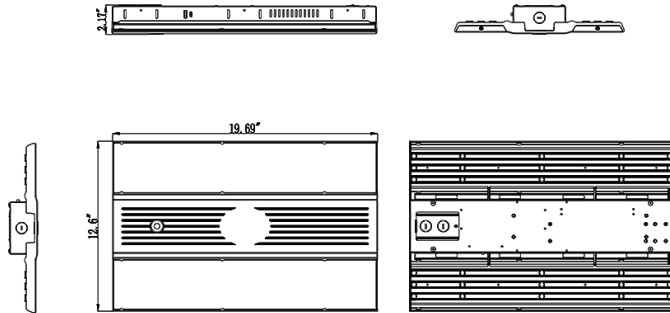

Features

- 100,000-Hour LED lifespan
- DLC Premium Listed
- 0-10V dimming, standard
- 5-Year, limited warranty

Ordering Matrix

Family	Size/Wattage	Color Temp	Mounting	Finish	Driver	Options
RBAY17	M					/LCBS/8CP
	M = 20" (260/220/160W) L = 39" (400/320/260W) S = 14" (130/100/80W)	Blank = 3500/4000/5000K	Blank = V-Hook/Chain	Blank = White	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	/E/8CPT4 = Battery Backup w/8' Cord & 480V Plug /E/8CP2 = Battery Backup w/8' Cord & 277V Plug /E/8CP = Battery Backup w/8' Cord & 120V Plug /E/8C = Battery Backup w/8' Cord /8CPT4 = 8' Cord & 480V Plug /8CP2 = 8' Cord & 277V Plug /8CP = 8' Cord & 120V Plug /8C = 8' Cord /LCBS/E = Lightcloud Blue w/PIR Sensor and Battery Back Up /LCBS = Lightcloud Blue w/PIR Sensor /E = Battery Backup <sup>1</sup> Blank = No Option

<sup>1</sup> Available only for 120-277V models