# HALV10L927-MA-CU/BL/E2

# RAB

Warm)

147 lm

10.5 lm/W

50,000 Hours

92

Color Accuracy 97 CRI

L70 Lifespan

Lumens

Efficacy



# **Copper Frame with Mirage Bronze Lens**

Note: Fixture will come fully assembled with the frame and lens shown above.

Proje	ect:	Type: Date:		
Prep	ared By:			
Driver Ir	nfo	LED Info		
Туре	Constant Current	Watts	14W	
120V	0.12A	Color Temp	2700K (Residential	

R9

0.07A

0.06A

0.06A

208V

240V

277V

Input Watts 14W

Compliance

# UL Listed:

Suitable for damp locations. Recommended for indoor use only.

# **ADA Compliant:**

Meets ADA Requirements for wall-mounted luminaires.

# IESNA LM-79 &lm-80 Testing:

**Technical Specifications** 

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNAIm-79 andIm-80

#### Performance

# Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

# Wattage Equivalency:

Equivalent to 60W Incandescent

#### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color

# **Color Stability:**

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

# Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Electrical

#### Driver:

Constant Current, Class 2, 120-277VAC, 50/60Hz, 350mA or 640mA

Dimming Driver: 0 - 10V (at 120-277V), TRIAC and ELV (at 120V only)

# THD:

19.9% at 120V, 21.7% at 277V

# Power Factor: 96.4% at 120V, 85.7% at 277V

# Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

Battery Backup Light Loss Factor: 0.343

### Construction

Housing: Die-cast and extruded aluminum

#### Mounting:

Wall mount with junction box included

### Lens:

Acrylic lens with mirage bronze print. See installation sheet for cleaning instructions.

#### **Operating Temperature:**

-20°C (-4°F) to 40°C (104°F)

### Green Technology:

Mercury and UV free. RoHS-compliant components.

#### Finish:

Luxuriously Electroplated Copper

# Other

### Bi-Level:

Allows 75%, 50%, 25% output modes

#### Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty</u>.

# HALV10L927-MA-CU/BL/E2

# **Technical Specifications (continued)**

# **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

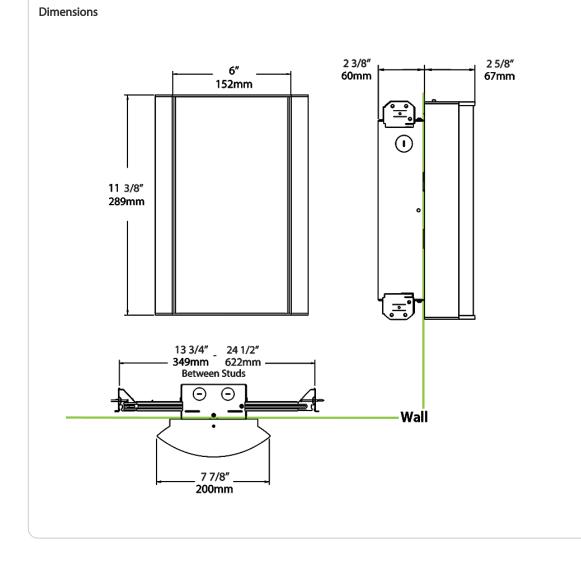



# HALV10L927-MA-CU/BL/E2

# RAB

Ordering	Ordering Matrix								
Family	Lumen Package	CRI/Color Temp		Lens		Finish	Options		
HALV	10L	927	-	MA	-	CU	/BL/E2		
	<b>10L</b> = 1000lm / 14W <sup>1</sup> <b>18L</b> = 1800lm / 25W <sup>1</sup>	940 = 90CRI, 4000K 935 = 90CRI, 3500K 930 = 90CRI, 3000K 927 = 90CRI, 2700K		<ul> <li>F = Frosted (Standard)</li> <li>FG1 = Frosted with Grill Style #1</li> <li>FG2 = Frosted with Grill Style #2</li> <li>FG3 = Frosted with Grill Style #3</li> <li>NL = Natural Leaves</li> <li>GL = Green Leaves</li> <li>TL = Toffee Leaves</li> <li>LW = Linen Hampton White LS = Linen Harbor</li> <li>MS = Metallic Spun Silver</li> <li>MC = Metallic Spun Copper</li> <li>MG = Metallic Spun Gold</li> <li>CW = Crush Polar White CS = Crush Sedona</li> <li>MP = Mirage Platinum</li> <li>MA = Mirage Bronze</li> </ul>		W = White K = Black S = Silver A = Antique Bronze SA = Satin Nickel CU = Copper	Blank = No Option /E2 = Battery Backup /MVS = Microwave Occupancy Sensor <sup>2</sup> /BL = Bi-Level Control /LC = Lightcloud® Controller /MVS/E2 = Microwave Occupancy Sensor w/ Battery Backup <sup>2</sup> /BL/E2 = Bi-Level Control w/ Battery Backup /LC/E2 = Lightcloud® Controller w/ Battery Backup		
1	Lumen values are appro	oximations for models	s with	a standard, frosted lens. Visit rai ² Available only with gril	0	5	based on your specific configuration.		