
# HALV10L930-CW-SA/LC/E2

# RAB

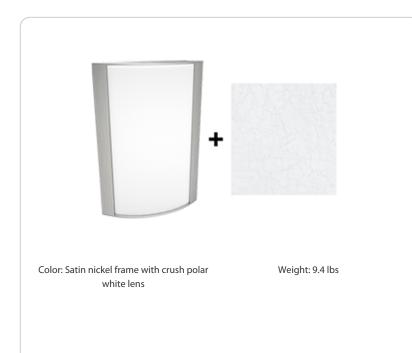

Technical Sp	ecifications
--------------	--------------

#### Lightcloud

## Lightcloud Controller Installed:

LCLC/W Fixture, Zone, and plug-load control from one powerful device. Capable of switching, 0-10V dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network. Attach to fixture, junction box, or electrical panel. Learn more about Lightcloud.

### Compliance

### UL Listed:

Suitable for damp locations. Recommended for indoor use only.

#### **ADA Compliant:**

Meets ADA Requirements for wall-mounted luminaires.

#### IESNA LM-79 &lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNAIm-79 andIm-80

## Performance

#### Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to 60W Incandescent

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color

#### Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

#### **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Electrical

#### Driver:

Constant Current, Class 2, 120-277VAC, 50/60Hz, 350mA or 640mA

#### Dimming Driver:

0 - 10V (at 120-277V), TRIAC and ELV (at 120V only)

## THD:

19.8% at 120V, 21.7% at 277V

#### **Power Factor:** 96.4% at 120V, 85.7% at 277V

Proje	ct:	Туре:	
Prepared By:		Date:	
Driver In	fo	LED Info	
Туре	Constant Current	Watts	14W
120V	0.12A	Color Temp	3000K (Warm)
208V	0.07A	Color Accuracy	94 CRI
240V	0.06A	R9	84
277V	0.06A	L70 Lifespan	50,000 Hours
Input Wa	tts 14W	Lumens	356 lm

#### Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

Efficacy

25.4 lm/W

Battery Backup Light Loss Factor: 0.343

#### Construction

#### Housing:

Die-cast and extruded aluminum

#### Mounting:

Wall mount with junction box included

#### Lens:

Acrylic lens with crush polar white print. See installation sheet for cleaning instructions.

# Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish: Luxuriously Electroplated Satin Nickel

# HALV10L930-CW-SA/LC/E2

# RAB

# **Technical Specifications (continued)**

# Other


### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u>

### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

#### Dimensions

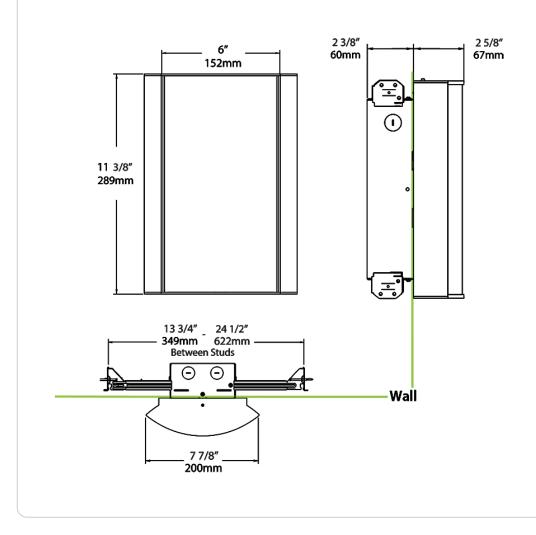

# HALV10L930-CW-SA/LC/E2

# RAB

Ordering Matrix									
Family	Lumen Package	CRI/Color Temp		Lens		Finish	Options		
HALV	10L	930	-	CW	-	SA	/LC/E2		
	10L = 1000lm / 14W <sup>1</sup> 940 = 90CRI, 4000K   18L = 1800lm / 25W <sup>1</sup> 935 = 90CRI, 3500K   930 = 90CRI, 3000K 927 = 90CRI, 2700K   FG2 = Frosted (Standard)   FG3 = Frosted with Grill Style   #3   NL = Natural Leaves   GL = Green Leaves   TL = Toffee Leaves   LW = Linen Hampton White   LS = Linen Stone   LH = Linen Harbor   MS = Metallic Spun Silver   MC = Metallic Spun Gold   CW = Crush Polar White   CS = Crush Sedona   MP = Mirage Platinum   MA = Mirage Bronze					W = White K = Black S = Silver A = Antique Bronze SA = Satin Nickel CU = Copper	Blank = No Option /E2 = Battery Backup /MVS = Microwave Occupancy Sensor <sup>2</sup> /BL = Bi-Level Control /LC = Lightcloud® Controller /MVS/E2 = Microwave Occupancy Sensor w/ Battery Backup <sup>2</sup> /BL/E2 = Bi-Level Control w/ Battery Backup /LC/E2 = Lightcloud® Controller w/ Battery Backup		
1	Lumen values are appro	oximations for models	s with	a standard, frosted lens. Visit rab <sup>2</sup> Available only with grili	-	-	based on your specific configuration.		