HALV18L927-CW-CU/LC/E2

RAB

Warm)

591 lm

22.8 lm/W

50,000 Hours

91

Color Accuracy 95 CRI

L70 Lifespan

Lumens

Efficacy



Technical	Specifications
1 CCI III CUI	specifications

Lightcloud

Lightcloud Controller Installed:

LCLC/W Fixture, Zone, and plug-load control from one powerful device. Capable of switching, 0-10V dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network. Attach to fixture, junction box, or electrical panel. Learn more about Lightcloud.

Compliance

UL Listed:

Suitable for damp locations. Recommended for indoor use only.

ADA Compliant:

Meets ADA Requirements for wall-mounted luminaires.

IESNA LM-79 &lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNAIm-79 andIm-80

Performance

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Wattage Equivalency:

Equivalent to 100W Incandescent

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color

208V

240V

277V

0.13A

0.11A

0.1A

Input Watts 25.9W

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Electrical

Driver:

Constant Current, Class 2, 120-277VAC, 50/60Hz, 350mA or 640mA

Dimming Driver:

0 - 10V (at 120-277V), TRIAC and ELV (at 120V only)

THD:

12.6% at 120V, 16.1% at 277V

Power Factor: 98.4% at 120V, 94.3% at 277V

Proje	ect:	Туре:			
Prep	ared By:	Date:			
Driver Ir	nfo	LED Info			
Туре	Constant Current	Watts	25W		
120V	0.22A	Color Temp	2700K (Residential		

R9

Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

Battery Backup Light Loss Factor: 0.187

Construction

Housing:

Die-cast and extruded aluminum

Mounting:

Wall mount with junction box included

Lens:

Acrylic lens with crush polar white print. See installation sheet for cleaning instructions.

Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish: Luxuriously Electroplated Copper

HALV18L927-CW-CU/LC/E2

RAB

Technical Specifications (continued)

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u>

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

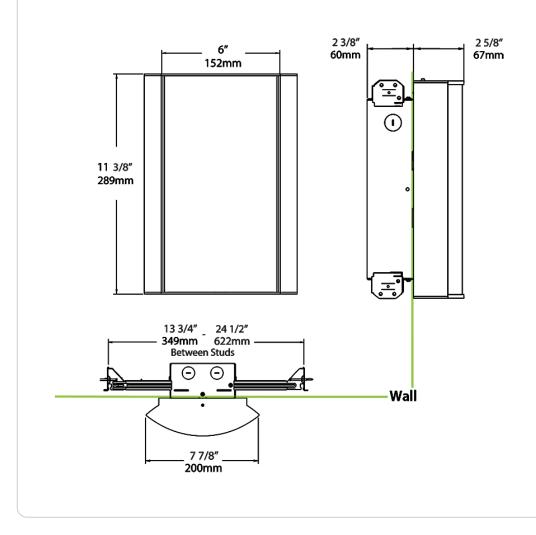

HALV18L927-CW-CU/LC/E2

RAB

Ordering Matrix								
Family	Lumen Package	CRI/Color Temp		Lens		Finish	Options	
HALV	18L	927	-	CW	-	CU	/LC/E2	
	HALV 18L 927 - CW - 10L = 1000lm / 14W ¹ 940 = 90CRI, 4000K 935 = 90CRI, 3500K 935 = 90CRI, 3500K 930 = 90CRI, 3000K 930 = 90CRI, 3000K 935 = 90CRI, 2700K FG1 = Frosted (Standard) FG1 = Frosted with Grill Style #1 FG2 = Frosted with Grill Style #1 FG3 = Frosted with Grill Style #2 FG3 = Frosted with Grill Style #3 NL = Natural Leaves GL = Green Leaves TL = Toffee Leaves TL = Toffee Leaves LW = Linen Hampton White LS = Linen Stone LH = Linen Harbor MS = Metallic Spun Copper MG = Metallic Spun Cold CW = Crush Polar White CS = Crush Sedona MP = Mirage Platinum MA = Mirage Bronze MA = Mirage Bronze					W = White K = Black S = Silver A = Antique Bronze SA = Satin Nickel CU = Copper	Blank = No Option /E2 = Battery Backup /MVS = Microwave Occupancy Sensor ² /BL = Bi-Level Control /LC = Lightcloud® Controller /MVS/E2 = Microwave Occupancy Sensor w/ Battery Backup ² /BL/E2 = Bi-Level Control w/ Battery Backup /LC/E2 = Lightcloud® Controller w/ Battery Backup	
1	¹ Lumen values are approximations for models with a standard, frosted lens. Visit rablighting.com for exact output based on your specific configuration. ² Available only with grill pattern							