
## HALV18L935-MG-SA/LC/E2

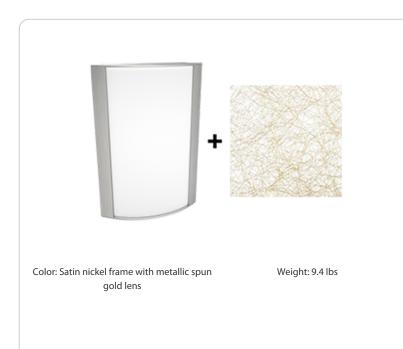

	a 10
Technical	Specifications

#### Lightcloud

### Lightcloud Controller Installed:

LCLC/K Fixture, Zone, and plug-load control from one powerful device. Capable of switching, 0-10V dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network. Attach to fixture, junction box, or electrical panel. Learn more about Lightcloud.

#### Compliance

#### UL Listed:

Suitable for damp locations. Recommended for indoor use only.

#### **ADA Compliant:**

Meets ADA Requirements for wall-mounted luminaires.

#### IESNA LM-79 &lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNAIm-79 and Im-80

### Performance

#### Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to 100W Incandescent

#### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color

#### **Color Stability:**

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

#### **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

#### Electrical

#### Driver:

Constant Current, Class 2, 120-277VAC, 50/60Hz, 350mA or 640mA

#### Dimming Driver:

0 - 10V (at 120-277V), TRIAC and ELV (at 120V only)

### THD:

12.6% at 120V, 16.1% at 277V

#### **Power Factor:** 98.4% at 120V, 94.3% at 277V

Proje	ect:	Туре:		
Prepa	ared By:	Date:		
Driver Ir	nfo	LED Info		
Type 120V	Constant Current 0.22A	Watts Color Temp	25W 3500K (Warm	

Туре	Constant Current	Watts	25W	
120V	0.22A	Color Temp	3500K (Warm Neutral)	
208V	0.13A			
240V	0.11A	Color Accuracy	95 CRI	
277V	0.1A	R9	85	
Input Watts	25.9W	L70 Lifespan	50,000 Hours	
•		Lumens	408 lm	
		Efficacy	15.8 lm/W	

#### **Battery Backup:**

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

**Battery Backup Light Loss Factor:** 0.187

#### Construction

#### Housing:

Die-cast and extruded aluminum

#### Mounting:

Wall mount with junction box included

#### Lens:

Acrylic lens with metallic spun gold print. See installation sheet for cleaning instructions.

**Operating Temperature:** 

### -20°C (-4°F) to 40°C (104°F)

Green Technology: Mercury and UV free. RoHS-compliant components.

Finish: Luxuriously Electroplated Satin Nickel

# HALV18L935-MG-SA/LC/E2

# RAB

### **Technical Specifications (continued)**

### Other


#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u>

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

#### Dimensions

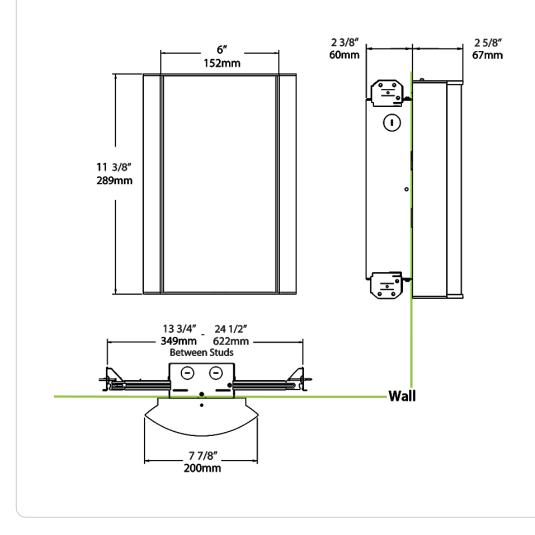

# HALV18L935-MG-SA/LC/E2

# RAB

Ordering Matrix							
Family	Lumen Package	CRI/Color Temp		Lens		Finish	Options
HALV	18L	935	-	MG	-	SA	/LC/E2
10L = 1000lm / 14W <sup>1</sup> 940 = 90CRI, 4000K F = Frosted (Standard) W = White Blank = No Option   18L = 1800lm / 25W <sup>1</sup> 935 = 90CRI, 3500K 935 = 90CRI, 3500K FG = Frosted with Grill Style K = Black /E2 = Battery Backup   930 = 90CRI, 2700K FG = Frosted with Grill Style K = Antique Bronze /MVS = Microwave Occupancy Sensor <sup>2</sup> #2 SA = Satin Nickel /LC = Lightcloud <sup>e</sup> Controller   #3 K= Natural Leaves /BL/E2 = Bi-Level Control w/ Battery Backup <sup>2</sup>						<pre>/E2 = Battery Backup /MVS = Microwave Occupancy Sensor <sup>2</sup> /BL = Bi-Level Control /LC = Lightcloud® Controller /MVS/E2 = Microwave Occupancy Sensor w/ Battery Backup <sup>2</sup> /BL/E2 = Bi-Level Control w/ Battery Backup /LC/E2 = Lightcloud® Controller w/ Battery</pre>	
<sup>1</sup> Lumen values are approximations for models with a standard, frosted lens. Visit rablighting.com for exact output based on your specific configuration. <sup>2</sup> Available only with grill pattern							