## HALVS10L927-LS-A/LC/E2

# RAB



Technical	Specifications	

## Lightcloud

## Lightcloud Controller Installed:

LCLC/K Fixture, Zone, and plug-load control from one powerful device. Capable of switching, 0-10V dimming, power monitoring. Can also be used to extend the range of the Lightcloud mesh network. Attach to fixture, junction box, or electrical panel. Learn more about Lightcloud.

## Compliance

## UL Listed:

Suitable for damp locations. Recommended for indoor use only.

### ADA Compliant:

Meets ADA Requirements for wall-mounted luminaires.

## IESNA LM-79 &lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNAIm-79 andIm-80

## Performance

## Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

## Wattage Equivalency:

Equivalent to 60W Incandescent

## LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs; binned and mixed for uniform light output and color

208V

240V

277V

Input Watts 14W

0.07A

0.06A

0.06A

## Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

## **Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

## Electrical

#### Driver:

Constant Current, Class 2, 120-277VAC, 50/60Hz, 350mA or 640mA

### **Dimming Driver:**

0 - 10V (at 120-277V), TRIAC and ELV (at 120V only)

## THD:

19.8% at 120V, 21.6% at 277V

#### **Power Factor:** 96.4% at 120V, 85.7% at 277V

Proje	ect:	Туре:			
Prep	ared By:	Date:			
Driver Ir	nfo	LED Info			
Туре	Constant Current	Watts	14W		
120V	0.12A	Color Temp	2700K (Residential Warm)		

R9

## Battery Backup:

Battery backup will operate the LED Lamp for 90 minutes if power fails. Wired for 120V-277V.

Color Accuracy 95 CRI

L70 Lifespan

Lumens

Efficacy

92

261 lm

18.6 lm/W

50,000 Hours

Battery Backup Light Loss Factor: 0.343

### Construction

## Housing:

Die-cast and extruded aluminum

### Mounting:

Wall mount with junction box included

### Lens:

Acrylic lens with linen stone print. See <u>installation</u> <u>sheet</u> for cleaning instructions.

## **Operating Temperature:**

-20°C (-4°F) to 40°C (104°F)

### Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish: Luxuriously Electroplated Antique Bronze

# HALVS10L927-LS-A/LC/E2

## **Technical Specifications (continued)**


## Other

Warranty: RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u>

## **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

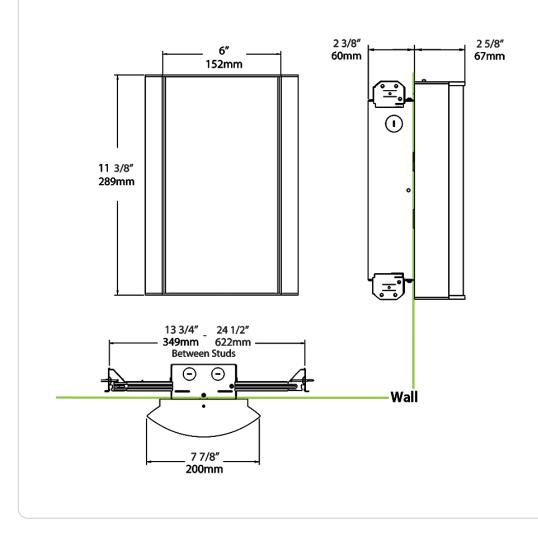

# HALVS10L927-LS-A/LC/E2

# RAB

Family	Lumen Package	CRI/Color Temp	Lens		Finish	Options
HALVS	10L	927	– LS	-	А	/LC/E2
	<b>10L</b> = 1000lm / 14W <sup>1</sup> <b>18L</b> = 1800lm / 25W <sup>1</sup>	940 = 90CRI, 4000K 935 = 90CRI, 3500K 930 = 90CRI, 3000K 927 = 90CRI, 2700K	<ul> <li>F = Frosted (Standard)</li> <li>FG1 = Frosted with Grill Style #1</li> <li>FG2 = Frosted with Grill Style #2</li> <li>FG3 = Frosted with Grill Style #3</li> <li>NL = Natural Leaves</li> <li>GL = Green Leaves</li> <li>TL = Toffee Leaves</li> <li>LW = Linen Hampton White LS = Linen Stone</li> <li>LH = Linen Harbor</li> <li>MS = Metallic Spun Gold</li> <li>CW = Crush Polar White</li> <li>CS = Crush Sedona</li> <li>MP = Mirage Platinum</li> <li>MA = Mirage Bronze</li> </ul>		W = White K = Black S = Silver A = Antique Bronze SA = Satin Nickel CU = Copper	Blank = No Option /E2 = Battery Backup /MVS = Microwave Occupancy Sensor <sup>2</sup> /BL = Bi-Level Control /LC = Lightcloud® Controller /MVS/E2 = Microwave Occupancy Sensor w, Battery Backup <sup>2</sup> /BL/E2 = Bi-Level Control w/ Battery Backup /LC/E2 = Lightcloud® Controller w/ Battery Backup
<sup>1</sup> [	umen values are approx	ximations for models w	5			based on your specific configuration.