

# INSTRUCTIONS

## JBSHARK8-G2 INSTALLATION

# RAB®

RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: [marketing@rablighting.com](mailto:marketing@rablighting.com)



SHARK - 8FT

### IMPORTANT

#### READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

**WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.**

**CAUTION: For proper weatherproof function all gaskets must be seated properly and all screws inserted and tightened firmly. Apply weatherproof silicone sealant around the edge of the ceiling mounting box and/or junction box. This is especially important with an uneven ceiling surface. Silicone all plugs and unused conduit entries.**

**FOLLOW ALL SHARK® (sold separately) INSTALLATION INSTRUCTIONS.**

### INSTALLATION

1. Use appropriate mounting hardware (*not supplied*) to secure the JBSHARK8-G2 Bracket (2) to Mounting Surface or Junction Box (*supplied by other*) as shown in Fig. 1. Check that the Gasket (2) is fully seated (Fig. 2). Use Cord Grip provided to feed supply wires into fixture.
2. Recommended JBSHARK8-G2 Bracket distance center to center is 38 1/8" and end to end is 51 5/8" as shown in Fig. 3.
3. Use appropriate UL approved wire connectors as required by code to complete wiring with supply wires. Be careful not to pinch wires.
4. Push Housing into JBSHARK8-G2 Bracket (2) to secure fixture to Mounting Surface as shown in Fig. 1.

Fig: 1

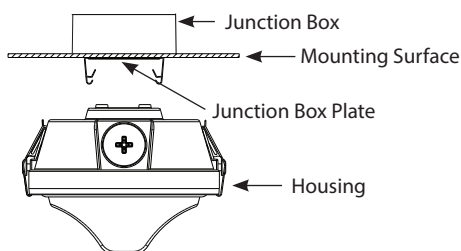


Fig: 2


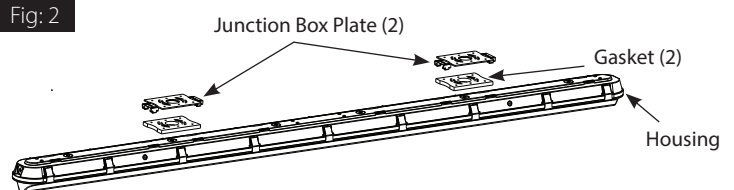


Fig: 3

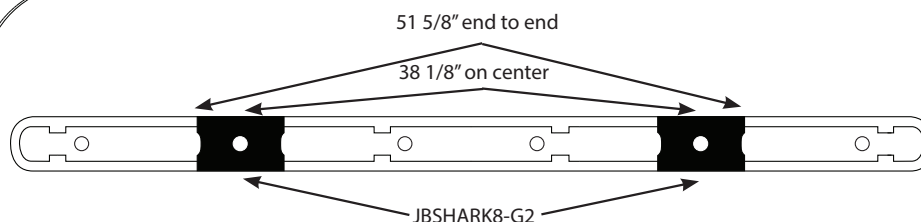

### TROUBLESHOOTING

1. Check that line voltage at the fixture is correct. Be sure the fixture is grounded properly.
2. Refer to wiring, cleaning and maintenance directions on SHARK® (*sold separately*) Installation Instructions.

*Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.*

**RAB®**  
© 2020 RAB LIGHTING Inc.  
Northvale, New Jersey 07647 USA

#### Easy Answers

[rablighting.com](http://rablighting.com)  
Visit our website for product info

Tech Help Line  
Call our experts: 888 722-1000

e-mail  
Answered promptly - [sales@rablighting.com](mailto:sales@rablighting.com)

Free Lighting Layouts  
Answered online or by request

JBSHARK8-G2 IN 0120  
73682-RAB

**RAB WARRANTY:** RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).