



Color: Black

Weight: 0.1 lbs

Project:	Type:
Prepared By:	Date:

**Technical Specifications**

**Lightcloud**

**Lightcloud Blue Installed:**

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA (Interior);  
NHCZ2BIA17L (Exterior)

Learn more at  
[www.rablighting.com/feature/new-lightcloud-blue](http://www.rablighting.com/feature/new-lightcloud-blue).

**Gateway Required:**

No

**Communication Protocol:**

Bluetooth Mesh

**Range:**

Outdoor: Up to 200 feet clear line of sight; Up to 120 feet around corners

**Spacing Criteria:**

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

**Factory Reset:**

Method 1: Delete from App  
Open the app and access the device settings for the paired device. Be sure that the device is online and select 'Delete'. The device will flash on/off 3x and return to full brightness.

Method 2: Manual

Locate the device identification button at the top of the Controller under the Lightcloud logo. Press and hold this button for 10s or until the indicator light begins flashing red. If the Controller is attached to a fixture, the fixture will also flash on/off 3x.

**Status Indicator:**

The status indicator light is located around the circumference of the top of the Controller.

Solid Green: connected to a Lightcloud Blue network.

Blinking Red: unprovisioned, ready to pair

**Device Identification Button:**

Located at the top of the controller under the Lightcloud logo.  
Once the Controller has been provisioned to the Lightcloud Blue mobile app this button offers the following functionality:  
Press once to rapid identify this device in the Lightcloud Blue mobile app  
Press twice to toggle circuit on and off  
Press twice and hold to set dim level  
Press and hold for 10s to reset the device to factory settings and into pairing mode

**Performance**

**Product Type:**

Lightcloud Blue Controller

**Description:**

Make it smart! Use this controller to connect compatible fixtures to Lightcloud Blue for wireless control. Easily control devices up to 200 feet apart, no need to run additional wire.

**Electrical**

**Dimmable:**

Yes using the Lightcloud Blue mobile app or compatible devices. The Low-Voltage Controller must be connected to a compatible 0-10V dim-to-off fixture with 12V AUX supply.

This will not operate properly when connected to a standard dimmer or dimming control.

## Technical Specifications (continued)

**Input Voltage:**

10.5-36VDC

**Operating Frequency:**

50/60Hz

**Operating Temperature:**

-4°F to 113°F (-20°C to 45°C)

**Construction**

---

**Finish:**

White

**Enclosure Material:**

Plastic

**Compliance**

---

**Listings:**

UL Listed

**Environment:**

Suitable for use indoors and outdoors in dry, damp, or wet environments.

**IP Rating:**

IP66

**Certification Model Number:**

LCBAUX-X/B

**FCC:**

Complies with Part 15 of the FCC Rules

**Other**

---

**Compatible Products:**

0-10V dim-to-off fixture with 12V AUX supply.

**Compatible Accessories:**

LCLCSENSE/SH

LC & LCB Luminaire standalone PIR sensor

LCLCSENSE/P/EG/A/2

Lightcloud luminaire PIR sensor for EZPAN

LCLCSENSE/M/EG/A

Lightcloud luminaire MVS sensor for EZPAN

LCLCSENSE/M/EG/B

Lightcloud luminaire PIR sensor for SWISH

LCLCSENSE/P/EG/B/2


Lightcloud luminaire MVS sensor for SWISH

**5-Year, No-Compromise Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's

warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

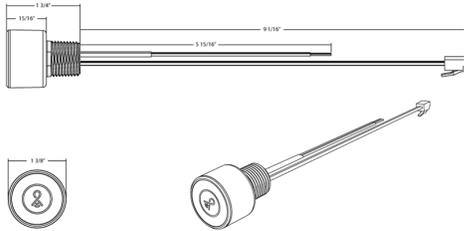

## Features

- Remotely controlled to enable switching and dimming in any compatible 0-10V dim-to-off LED fixture with 12V AUX supply
- Direct connect to the Lightcloud Blue mobile app via Bluetooth; no Gateway or Hub required
- For indoor and outdoor applications
- Manually control a fixture on/off and adjust the dim level using the single Controller button
- Quickly identify the fixture during commissioning by pressing the Controller button 1x to highlight the device in the Lightcloud Blue mobile app

## Ordering Matrix

Family	Voltage	Range	Color
LCBAUX		X	/B
	Blank = 10.5V-36V	Blank = Standard X = Extended	/W = White /B = Black