



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	14/18/22/26/30W
120V	0.12A/0.15A/0.18A/0.22A/0.25A	Color Temp	3500/4000/5000/5700/6500K
208V	0.07A/0.09A/0.10A/0.13A/0.14A	Color Accuracy	84-87 CRI
240V	0.06A/0.07A/0.09A/0.11A/0.12A/0.13A	L70 Lifespan	100,000 Hours
277V	0.06A/0.07A/0.09A/0.10A/0.11A	Lumens	2036-4317 lm
Input Watts	14-30W	Efficacy	142.4-146.2 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
30/26/22/18/14W (factory default 30W)
Color temperature selectable by
3500/4000/5000/5700/6500K (factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-QFCG72 (Direct Linear Ambient Luminaires)
DLC Product Code: S-9JQPSP (Stairwell and Passageway Luminaires)

LED Characteristics

LEDs:

Long-life, high-efficacy, discrete, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Color Consistency:

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Construction

Ambient Temperature :

Max Power Temp Rating: 122°F (50°C)
Middle Power Temp Rating: 55°C (132°F)
Low Power Temp Rating: 62°C (144°F)

Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

Lens:

Polycarbonate lens

Housing:

Galvanized steel (painting)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Electrical

Driver:

Constant Current, Class II, 120-277V, 50/60 Hz:
30W: 120V: 0.27A, 208V: 0.15A, 240V: 0.13A, 277V: 0.12A
26W: 120V: 0.22A, 208V: 0.13A, 240V: 0.11A, 277V: 0.09A
22W: 120V: 0.18A, 208V: 0.11A, 240V: 0.09A, 277V: 0.08A
18W: 120V: 0.15A, 208V: 0.09A, 240V: 0.08A, 277V: 0.06A
14W: 120V: 0.12A, 208V: 0.07A, 240V: 0.06A, 277V: 0.05A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Aux Power Supply:

Yes

Technical Specifications (continued)

Dim to Off:

Yes

Surge Protection:

L-N 1 kV, L/N-G 2 kV

Installation

Mounting:

Surface mounting standard. V-Hooks and Chain mounting available (ordered separately, SR VHOOK KIT).

Sensor Settings

Remote Control Accessory:

Adjust settings using remote control (catalog# MSR1). Only available with 0-10V dimming driver options. [Remote control available here.](#)

Other

5-Year Limited Warranty:


The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Accessories:

Suspended Mounting Kit: SR VHOOK KIT

Surface Mount Kit: SR JOIN KIT

Dimensions

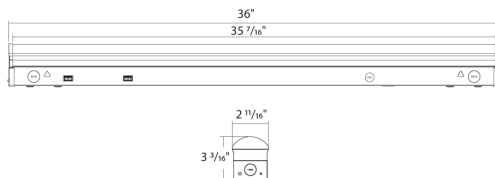

Features

50,000-Hour LED lifespan

120-277V standard

0-10V dimming, standard

5-Year, limited warranty

Ordering Matrix

Family	Size/Wattage	Mounting	Color Temp	Finish	Options
SR	3				
	3 = 3ft (30/26/22/18/14W) 4L = 4ft (28/24/20/16/12W) 4 = 4ft (40/35/30/25/20W) 8 = 8ft (60/52/44/36/28W) 8H = 8ft (85/75/65/55/45W) 2 = 2ft (19/15/11/7/4W)	Blank = J-Box Adaptor	Blank = 3500/4000/5000/5700/6500K CCT Adjustable	Blank = White	/LCBS/MVS/E = Lightcloud Blue MVS Sensor w/Battery Back Up /LCBS/E = Lightcloud Blue PIR Sensor w/Battery Back Up /PIR/E = Passive Infrared Occupancy Sensor w/Battery Back Up /MVS/E = Microwave Occupancy Sensor w/Battery Back Up /LCBS/MVS = Lightcloud Blue w/MVS Sensor /LCBS = Lightcloud Blue w/PIR Sensor /PIR = Passive Infrared Occupancy Sensor /MVS = Microwave Occupancy Sensor /E = Battery Back Up Blank = No Option