### W34-90L-840/LC

# RAB



Proje	ect:	Туре:		
Prep	ared By:	Date:		
Driver Ir	nfo	LED Info		
<b>Driver Ir</b> Type	<b>nfo</b> Constant Current	LED Info Watts	86W	
Туре	Constant Current	Watts	4000K (Neutral)	
Туре 120V	Constant Current 0.73A	Watts Color Temp	4000K (Neutral) 83 CRI	
Type 120V 208V	Constant Current 0.73A 0.42A	Watts Color Temp Color Accuracy	4000K (Neutral) 83 CRI	

### **Technical Specifications**

#### Other

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

#### Electrical

#### Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.73A, 208V: 0.42A, 240V: 0.36A, 277V: 0.32A

**THD:** 7.82% at 120V, 8.93% at 277V

··· ··· · , ··· · ,


**Power Factor:** 99.6% at 120V, 97.2% at 277V

#### Compliance

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements. DLC Product Code: PPWYVQCZ

## W34-90L-840/LC

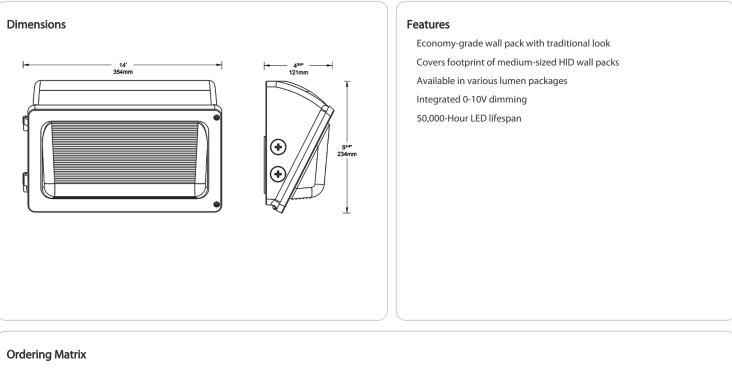

Family	Lumen Package		CRI/Color Temp	Voltage	Options
W34 –	90L	-	840		/LC
	<b>55L</b> = 6,500lm, 51W <b>70L</b> = 8,500lm, 69W <b>90L</b> = 10,000lm, 87W		Blank = 80 CRI / 5000K 840 = 80 CRI / 4000K 830 = 80 CRI / 3000K	Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming	Blank = No Option /PCU = 120-277V Button Photocell /MVS = Microwave Motion Sensor /LC = 120-277V Lightcloud® Controller

All values are nominal with +/- 10% tolerance. See spec sheet for more details.