


Mechanical Time Switch - 24-Hour Mechanical Time Switch, 120 VAC, 60Hz, 1 NO/1 NC, SPDT, Indoor Metal Enclosure, 1 Hour Interval

Item T105

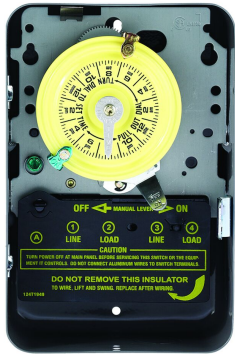

PRODUCT DESCRIPTION

The T100 Series Mechanical Time Switch has proven it can stand the test of time. These dependable time switches can handle electrical loads up to 40 A per pole and allow for up to 12 ON/OFF operations per day. A manual override switch provides added convenience.

FEATURES

- ▶ Direct 24-hour control of most loads
- ▶ Up to 12 ON/OFF operations each day with minimum ON/OFF times of one hour
- ▶ Manual override
- ▶ One ON and one OFF tripper included
- ▶ Can be installed in most Intermatic enclosures

APPLICATIONS

- ▶ Timing/Scheduling ON/OFF
- ▶ Indoor Lighting Control

TECHNICAL DATA

General	
Model Number	T105
Description	24-Hour Mechanical Time Switch, 120 VAC, 60Hz, 1 NO/1 NC, SPDT, Indoor Metal Enclosure, 1 Hour Interval
UPC Code	078275800106
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

Control Specifications	
Minimum ON/OFF Times	1 hour
Maximum ON/OFF Operations	12
Skipper Wheel	Not Included
Operation Mode	24 hour
Has Manual Override	Yes
Application Compatibilities	LED; HID

Mechanical Specifications	
Enclosure Type	Indoor type 1 metal
Number of Trippers Included	1 ON/1 OFF

Dimensions	
Product Dimensions (H x W x D) in	7 7/8 x 5 1/8 x 3 5/8 in
Wire Size Min	#14 AWG
Wire Size Max	#8 AWG
Knockout Dimensions Bottom	(2) combination 1/2" - 3/4"
Knockout Dimensions Back	(1) combination 1/2" - 3/4"

Load Ratings

Tungsten Range(s)	40 A, 120-240 VAC, 60 Hz
Electronic Ballast	16 A
Electronic Ballast Load Ratings Ranges	16 A, 120 VAC
Inductive	40 A, 240 VAC, 60 Hz; 40 A, 208 VAC, 60 Hz; 40 A, 120 VAC, 60 Hz
Motor	2 HP, 24 FLA @ 120 VAC, 60 Hz; 5 HP, 28 FLA @ 240 VAC, 60 Hz
Resistive Load Ratings Ranges	40 A, 120-240 VAC, 60 Hz
Inductive Load Ratings Ranges	40 A, 120-240 VAC, 60 Hz
Pilot Duty Load Ratings Ranges	1000 VA, 120-240 VAC, 60 Hz

Electrical Specifications

Wiring Option	Terminals
Input Voltage Range(s)	120 VAC, 60 Hz
Number of Circuits	1
Switch Type	1 NO/1 NC; SPDT
Maximum Power Consumption (W)	3 W

Packaging

Unit Carton Dimensions (H x W x L) in	8.25 x 3.5 x 5.5 in
---------------------------------------	---------------------

Environmental Specifications

Temperature (operation)	-40 °F to 130 °F / (-40 °C to 54 °C)
-------------------------	--------------------------------------

Standards and Certifications

UL Certification	cULus
CSA Certification	cCSAus
Other Certifications and Compatibilities	LED
UL File Number	UL917
CSA File Number	C22.2-177; LR3730
California Proposition 65	Lead

ACCESSORIES




156T1978AMX
1 Set of ON/OFF Trippers for T100, T7000, and WH40



156T1978A
Extra/replacement trippers 1 ON and 1 OFF



156T1978AD12
12 Pack of 156T1978A Trippers for T100, T7000, and WH40



22T338GR
Mounting Bracket for Intermatic Standardized Timer Mechanisms



124T1952
Insulator for Double-Pole Time Switch (T103, T104, T105, T173, T174, T175, T176, T185, WH40)



WG1570-10D
125 VAC, 60 Hz Motor for T101, T103, T105



WG1570-10DMX
125 VAC, 60 Hz Motor for T101, T103, T105

Product Image Not Available

156T1957A
Skipper Screws (3 per package)