

# Weather Proof Cover - Plastic In-Use Weatherproof Cover, Single-Gang, Vrt/Hrz, 3.625" Clear

Item WP1110C



#### PRODUCT DESCRIPTION

Plastic In-Use Weatherproof Covers are easy to install and include adhered gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

## **FEATURES**

- ► Complies with 2020 NEC Article 314.15 for damp and wet locations
- ► UL Certified for Type 3R outdoor enclosures
- ► Meets requirements for cold impact testing: -60° F (-51° C)
- ► Heavy-duty UV stabilized polycarbonate cover, mounting base and inserts
- ▶ 1/8" (3 mm) thick, pre-adhered neoprene gasket with slits for mounting screws
- Lockable hasp: All models accept up to 1/4" (6 mm) dia shank, except WP3100C & WP3103C accept up to 1/8" (3 mm) dia shank
- ► Three inserts provided with all models that allow each model to meet multiple installations (up to 16 configurations)
- ► Max cord size: (2) #14 AWG or (1) #12 AWG
- Mounts vertically or horizontally
- ► Warranty: 1-year limited

#### **APPLICATIONS**

► Receptacle Protection

## **TECHNICAL DATA**

Mandal Novales	
Model Number	WP1110C
Description	Plastic In-Use Weatherproof Cover, Single-Gang, Vrt/Hrz, 3.625" Clear
UPC Code	078275072824
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

Mechanical Specifications	
Number of Included Inserts	3
Insert Types Included	WP17
Hinge Direction	Vertical/Horizontal
s Extra-Duty Rated	No

Dimensions	
Product Dimensions (H x W x D) in	5.75 x 4 x 3.625 in
Accepted Cord Size Max	2x14 AWG; 1x12 AWG
Box Type	Single

Material Specifications	
Color	Clear
Weatherproof Cover Material	UV Stabilized Plastic

## Packaging




 Shipping Weight (lbs)
 0.444

 Unit Carton Dimensions (H x W x L) in
 4.001 x 4.501 x 6.251 in

Standards and Certifications		
UL Certification	cULus	
California Proposition 65	None	
RoHS Certification	N/A	



## **DRAWINGS AND DIAGRAMS**

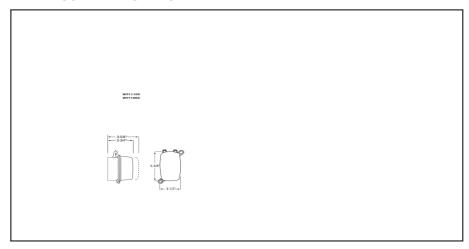



## **ACCESSORIES**



WP17 Single-Gang Inserts (3)