

## Weather Proof Cover - Extra-Duty Plastic In-Use Weatherproof Cover, Single-Gang, Vrt/Hz, 2.75" White

Item WP5100W



### PRODUCT DESCRIPTION

Plastic In-Use Weatherproof Covers are extra-duty rated and easy to install. Covers come with a gasket, mounting screws, base, cover assembly and inserts to meet the needs of a variety of applications.

### FEATURES

- ▶ Complies with 2020 NEC Article 406.9 (B)(1) for wet locations and extra-duty applications
- ▶ CEC Article 26-702 Compliant
- ▶ UL Certified for Type 3R outdoor enclosures
- ▶ Meets requirements for cold impact testing: -60° F (-51° C)
- ▶ Heavy-duty UV stabilized polycarbonate cover, mounting base and inserts
- ▶ 1/8" (3 mm) thick, neoprene gasket with slits for mounting screws
- ▶ Lockable hasp: All models accept up to 1/4" (6 mm) dia shank
- ▶ Impact rated: 12 lbf. impact test to ensure cover remains intact
- ▶ Reinforced hinge pin designed to exceed 40 lbf. hinge hang/stress test
- ▶ Warranty: 1-year limited

### APPLICATIONS

- ▶ Receptacle Protection

### TECHNICAL DATA

#### General

Model Number	WP5100W
Description	Extra-Duty Plastic In-Use Weatherproof Cover, Single-Gang, Vrt/Hz, 2.75" White
UPC Code	078275145672
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

#### Mechanical Specifications

Number of Included Inserts	3
Insert Types Included	WP17
Hinge Direction	Vertical/Horizontal
Is Extra-Duty Rated	Yes

#### Dimensions

Product Dimensions (H x W x D) in	6 1/3 x 4 2/3 x 2 3/4 in
Accepted Cord Size Max	2x14 AWG; 1x12 AWG
Box Type	Single

#### Material Specifications

Color	White
Weatherproof Cover Material	UV Stabilized Plastic

#### Packaging


Shipping Weight (lbs)	0.5
-----------------------	-----

Unit Carton Dimensions (H x W x L) in	6.5 x 2.75 x 4.75 in
---------------------------------------	----------------------

**Standards and Certifications**

UL Certification	cULus
CSA Certification	cCSAus
California Proposition 65	None

**DRAWINGS AND DIAGRAMS**

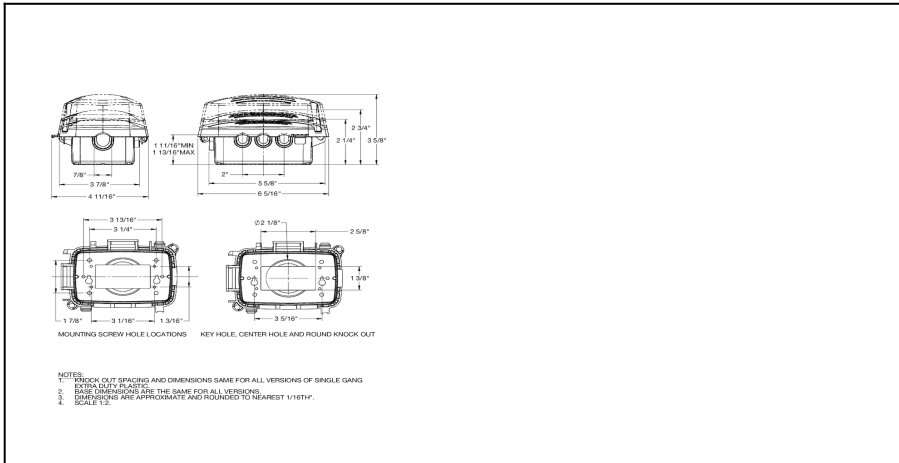

---

## ACCESSORIES



WP17  
Single-Gang Inserts (3)