

IC1 Series 4" Incandescent Housing

IC Rated, Compact Size



Features

- 4" Housing
- Medium base porcelain socket with nickel-plated copper screw shell
- Housing is vertically adjustable to accommodate up to a 1" ceiling thickness
- Aluminum housing is fully assembled for ease of installation
- Shipped with socket cap to protect against paint overspray
- Real Nail® 3 bar hangers: telescoping system with pre-installed removable nail for easy repositioning of housing in joist construction • Integral T-bar mounting feature for secure installation in suspended ceilings • Patented breakaway bars for tight joist spacing • Bar hangers may be re-positioned 90° • Curved foot facilitates alignment with joist bottom • Quick-Loc slot and oversized set screw lock fixture in position
- Pre-wired junction box with (6) 1/2" and (1) 3/4" knockouts with pryout slots, (4) non-metallic sheathed cable connectors, and ground wire
- Shadow-free, knife-edge trim design blends smoothly into the ceiling and allows architectural continuity with Aculux® trims
- UL Listed, C-UL/CSA certified for through-branch wiring, maximum (6) #12 AWG minimum 90° C branch circuit conductors (3 in, 3 out)
- Thermally protected against improper use of lamps
- Lamp wattage ratings and apertures based on trim selection on pages 39-41

Ordering Information

Catalog Number: **IC1** - Standard

Catalog Number: **IC1S** - IC1 with smaller footprint bar hanger (Real Nail® 2)

Catalog Number: **IC1W** - IC1 with push-in electrical connectors for fast, secure installation



Description

IC rated, energy efficient Air-Loc® sealed double wall construction housing does not require separate Air-Loc gasket • Can be completely covered with insulation • Air-Loc housing with all trims stops infiltration and exfiltration of air, reducing heating and cooling costs



Listings

UL Listed, C-UL/CSA certified for through-branch wiring, damp and wet locations • Washington State, IECC and MEC energy codes as tested per ASTM-E283 • Wet location listed with trims 11, 12, 4101, 4102 and 4181 • Wet location listed with trims 14 and 17 with outdoor rated PAR20 lamps • Conforms with City of Chicago IP requirements

Accessories

Catalog Number	Description
GU10-WHIP	Medium base to GU10 base flexible socket adapter (use with 440 & 448 trims only)
T599	1" Socket Extender
4TSA	4" Housing Adaptor Converts original 4" housings for optimal retention of push-in style trims.

Dimensions

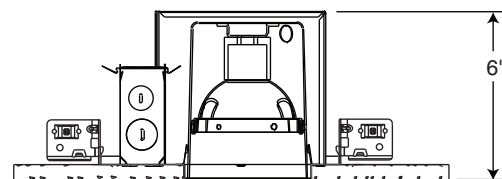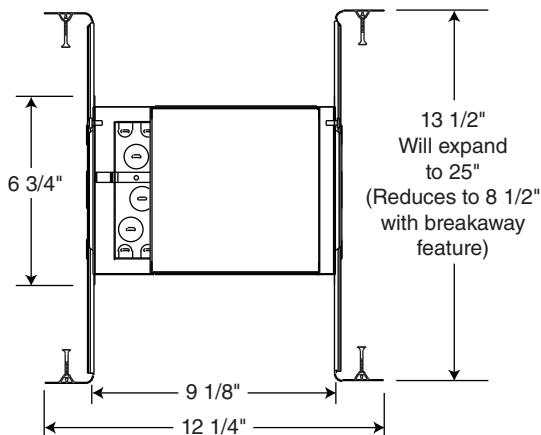

4 1/2" Ceiling Cutout

Down-Lites

