


GFTR2-HGW

20 Amp SmartlockPro® GFCI Receptacle/Outlet, Hospital Grade, Tamper-Resistant

SmartlockPro Self-Test GFCI Duplex Receptacle Outlet, Extra Heavy-Duty Hospital Grade, Wallplate Included, Tamper-Resistant, Power Indication, 20 Amp, 125 Volt, Back and Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - White

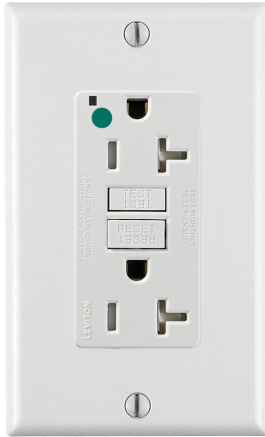


Color :  White

UPC Code : 078477723821

Country Of Origin : China

NEMA :  5-20R

Available Colors :

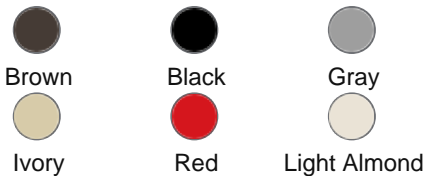

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1 HP

Electrical Specifications

Amperage : 20 A

Grounding : Self-Grounding

Pole : 2

Short Circuit Current Rating : 10kA

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-0 per UL 94

Operating Temperature : -35C to +66C

Material Specifications

Body Material : Polycarbonate

Face Material : PBT

Ground Clips : Brass

Grounding Screw : Plated Steel

Line Contacts : Brass

Shutter Mechanism : Delrin® Acetal

Strap Material : Galvanized Steel

Terminal Clamp : Brass

Terminal Screws : Plated Steel

Mechanical Specifications

Product ID : Ratings are permanently marked on device

Screw Terminal Torque : 14-18 in-lbs

Terminal Accom. : 14-10 AWG solid or stranded

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Termination : Back and Side Wire

Product Features

Brand : SmartlockPro

Color : White

Device Type : Duplex Receptacle Outlet

Feature : Wallplate Included|Tamper-Resistant|Power Indication

Function : GFCI

Grade : Extra Heavy-Duty Hospital Grade

NEMA : 5-20R

Standards and Certifications

ANSI : C-73

Applicable Standards : UL 943, UL 498, CSA C22.2 No. 42 & 144, FedSpec W-C-596

Certification/Listing : UL, CSA, NOM-ANCE

NEMA : WD-1 & WD-6

Warranty

Warranty : 2-Year Limited

Patents *

MX308495	US7737809
CA2427366	US7868719
US9077091	MX315596
CA2621644	US7820909
MX269232	US9053886
US8242362	US8599522
MX251584	CA2515035
US8587914	US8004804
CA2425810	US7697252
CA2677283	MX302458
US7355117	MX276626
US8547126	CA2865659

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

SPECIFICATION SUBMITTAL

<p>JOB NAME:</p> <input style="width: 90%; height: 20px;" type="text"/>	<p>CATALOG NUMBERS:</p> <table border="1" style="width: 100%;"> <tr> <td style="width: 50%; height: 20px;"><input type="text"/></td> <td style="width: 50%; height: 20px;"><input type="text"/></td> </tr> <tr> <td style="width: 50%; height: 20px;"><input type="text"/></td> <td style="width: 50%; height: 20px;"><input type="text"/></td> </tr> </table>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>				
<input type="text"/>	<input type="text"/>				
<p>JOB NUMBER:</p> <input style="width: 90%; height: 20px;" type="text"/>					

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S. T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.