

NE-602LED

Compact Dual Head LED Emergency Light with Optional Remote Capability

Source: (2) 1W or 2W LED
(2) 75lm or 125lm

Type _____

Project _____

Catalog No. _____

Notes _____

PRODUCT DESCRIPTION

Luminaire provides 90 minutes of light from two adjustable heads for illuminating paths of egress upon failure of normal power. Emergency unit is available in higher lumen output and remote capability.

FEATURES

- Compact housing with (2) adjustable LEDs
- Light weight snap together design
- Plastic enclosure with 5VA flame retardant.
- 3.6V maintenance-free, rechargeable Ni-Cad battery.
- Self-diagnostic and self-testing option available
- High output option available (4W / 250lm)
- Ceiling or wall mounted
- Universal 120-277V input
- Remote capable, must specify

SPECIFICATION

Construction: Injection-molded thermoplastic ABS housing. Plastic enclosure with 5VA flame retardant. Quick connector design for easy installation. Two fully adjustable glare-free round heads for emergency lighting.

Mounting: Plastic enclosure includes a top and side knockout for conduit application. Suitable for wall mounting or ceiling mounting. Waterproof vandal resistant enclosure available, must specify NEG-602.

Operation: Luminaire will operate for a minimum of 90 minutes during a loss of power with a 24 hour maximum recharge time per battery.

ELECTRICAL

Input Voltage: 120/277VAC 60Hz

Lumens / Wattage:

NE-602LEDRC: (2) 75lm / 1W

NE-602LEDHORC: (2) 125lm / 2W

Color Temperature: 6000K

Operating Temp.: 10°C to 40°C ambient temperature (-25°C to 50°C when used with NEG-602)

Battery: NiCad 3.6V 3W maintenance-free


Remote Option: Luminaire is capable of including an additional 3.6V / 3W battery. Additional battery is used to power an additional remote emergency light. Upon power failure, additional battery requires an additional 24 hours to recharge.

LABELS AND LISTINGS

- cULus Listed for Damp Locations (Wet Location Listed when used with NEG-602)
- Meets or exceeds all requirements in NFPA 70, NFPA 101 life safety code
- [3-Year Limited Warranty](#)



PRODUCT IMAGES & DIMENSIONS

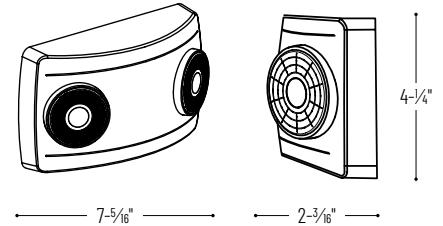

NEG-602



NEB-NICAD4



NEB-NICAD5

Compact Dual Head LED Emergency Light

Description

- ~~NE-602LEDB = (2) 1W / 75lm LED Heads without Battery for Remote Capability, Black Finish~~ (Discontinued, replacement: [NE-612LEDB](#))
- ~~NE-602LEDW = (2) 1W / 75lm LED Heads without Battery for Remote Capability, White Finish~~ (Discontinued, replacement: [NE-612LEDW](#))
- ~~NE-602LEDRCB = (2) 1W / 75lm LED Heads with 3.6V / 3W Battery for Remote Capability and Self Diagnostics / Self-Testing, Black Finish~~
- ~~NE-602LEDRCW = (2) 1W / 75lm LED Heads w/ Battery for Remote Capability, Self-Diagnostics & Testing~~ (Discontinued, replacement: [NE-612LEDRCW](#))
- ~~NE-602LEDHORCB = (2) 2W / 125lm LED Heads with 3.6V / 3W Battery for Remote Capability and Self Diagnostics / Self-Testing, Black Finish~~
- ~~NE-602LEDHORCW = White Finish~~ (Discontinued, direct replacement: [NE-612LEDHORCW](#))

Optional Accessory

Description

- **NEG-602** = Waterproof Vandal Resistant Enclosure
- **NEB-NICAD4** = Replacement Battery for NE-602LED
- **NEB-NICAD5** = Replacement Batteries for NE-602LED with Remote (RC)

Example: **NE-602LEDRCW** = Compact Dual Head LED Emergency Light with (2) 1W / 75lm LED Heads with 3.6V / 3W Battery for Remote Capability and Self Diagnostics / Self-Testing, White finish