

NELOCAC-16R

16" ELO LED Surface Mount Luminaire

Source: 20W LED
2100lm

PRODUCT DESCRIPTION

16" ELO LED Surface Mount is a thin 1" luminaire that mounts easily over a standard or fire rated junction boxes.

FEATURES

- Delivering up to 2100 lumens
- 2700K, 3000K or 4000K @ 90+ CRI
- Easily surface mounts over junction box
- Can be suspended from ceiling with pendant or stem kit accessory
- Dimmable with Triac or ELV dimmer
- 5-year limited warranty

MOUNTING

Surface Mount: Steel bracket mounts on junction box and luminaire twist and locks onto steel bracket.

Compatible Junction Boxes:

- 3" and 4" Octagonal
- 4" Square
- 4" Pancake
- 4" Plastic Round

Cable Mount: Pendant kit (ordered separately) can be used to suspend luminaire up to 4'.

Stem Mount: Stem kit (ordered separately) can be used to suspend luminaire from swivel canopy from 1' to 7' (must specify). Swivel canopy is compatible with sloped ceilings with a ceiling pitch from 1/12 to 10/12.

ELECTRICAL

Input Voltage: 120-277V

Delivered Lumens / Wattage: 2100lm / 20W

Color Temperature: 2700K, 3000K or 4000K

Color Rendering Index: 90+ CRI

Lifetime: 54,000 Hours @ L70

Operating Temperature: 0°C to 40°C ambient temperature

Dimming: Triac or ELV @ 120V only

[Click Here](#) or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab

OPTIONAL ACCESSORIES

[NELOCAC-16PK](#) = 4' Pendant Kit

[NELOCAC-16ST](#) = Stem Mount Kit, must specify length

LABELS AND LISTINGS

- cETLus Listed for Damp Location
- ENERGY STAR certified
- FCC Listed
- 5-Year Limited Warranty
- Certified to the high efficacy requirements of California Title 24 JA8-2022
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1).



Type

Project


Catalog No.

Notes


Performance Data

Part Number	Lumens	CCT
NELOCAC-16R927W	1738lm	2700K
NELOCAC-16R930W	1922lm	3000K
NELOCAC-16R940W	2097lm	4000K

PRODUCT IMAGES & DIMENSIONS

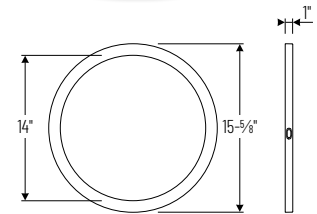

NELOCAC-16R
16" ELO

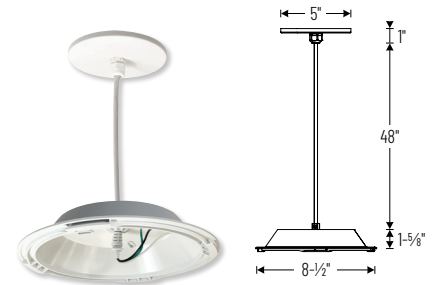

NELOCAC-16PK
Pendant Kit



NELOCAC-16ST
Stem Kit

16" ELO LED Surface Mount Luminaire

CCT / CRI / Finish

NELOCAC-16R927W = 2700K / 90+ CRI / White Finish

NELOCAC-16R930B = 3000K / 90+ CRI / Black Finish

NELOCAC-16R930W = 3000K / 90+ CRI / White Finish

NELOCAC-16R940W = 4000K / 90+ CRI / White Finish

Optional Mounting Accessory

Description	Finish	Length
NELOCAC-16PK = Pendant Kit	B = Black	(blank) = 4'
	W = White	
NELOCAC-16ST = Stem Kit	B = Black	/12 = 1'
	W = White	/24 = 2'
		/36 = 3'
		/48 = 4'
		/60 = 5'
		/72 = 6'
		/84 = 7'

Example: **NELOCAC-16R930W** = 16" ELO LED Surface Mount Luminaire, 3000K / 90+ CRI, White finish