


2" Iolite Accessories

2" Iolite Round Trimless Adjustable

Type	
Project	
Catalog No.	
Notes	

FIELD CHANGEABLE OPTICS

Iolite luminaires include spot, narrow flood and flood optics. Optics can be changed in the field by removing LED module from die-cast trim. Optional frosted optics are available.

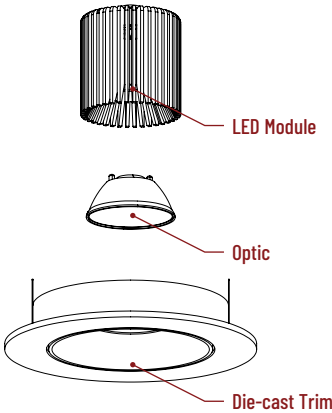

LED Module

Optic

Die-cast Trim



Frosted Optics

NIO-REFL38FR
NIO-REFL60FR

60° Optic
73° Optic

Not compatible with /HL LED module.



Premium TIR Optics

NIO-REFLTIR15
NIO-REFLTIR25

22° Optic
26° Optic

Not compatible with /HL, Comfort Dim (CDX) LED modules or Hex Cell Louver




10° TIR Optic Assembly

Specialized narrow spot LED module assembly is also available. Requires LE4 housing, [Click Here](#) for more information.

ACCESSORIES

Iolite accessories can be added at any point in the design process. Accessories easily install between LED module and die-cast trim. Luminaire will accommodate (1) hex louver and (1) collar accessory, no accessory holder required.

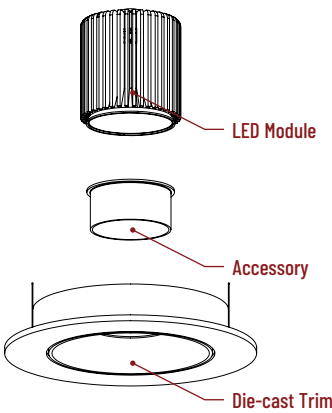

LED Module

Accessory

Die-cast Trim



Translucent Decorative Collar

NIO-AS14(color)
NIO-AS19(color)
NIO-AS26(color)
Color:
AM (amber), BLU (blue), FR (frosted), R (red)

5/8" length
3/4" length
1" length

Translucent collars color the aperture with the specified color while producing white general light. Collars are available in different lengths. Use to add interest, create a theme, match a theme or define a space.



Opaque Collar Snoot

NIO-AS14(color)
NIO-AS19(color)
NIO-AS26(color)
Color:
MPW (matte powder white), WH (white)

5/8" length
3/4" length
1" length

Opaque snoot greatly reduces aperture brightness while preserving light output.



Hex Cell Louver

NIO-HC


Black

Hex cell louver subtly reduces aperture brightness by reducing light output by about 20%.

Hex cell louver is not compatible with TIR optics.


TRIMLESS

2" Iolite trimless downlights have no exposed trim flange and the result is a minimalist knife edge appearance. A trimless mount mud ring is installed after the drywall and a professional drywall finisher floats the ceiling to blend in the mud ring.



Mud Ring

Suction Cup



Trimless Mount Mud Ring

NIO-TLMR-2RA

Mounts trimless downlight with no exposed flange and no extension beyond ceiling plane. Mud ring attaches to drywall. Only for use with NH10ICD-28 or NH10ICDCP-28 new construction housings and NIO-2RTLND or NIO-2RTLA. Dimensions: 7-7/8" diameter 1/2" thick



Suction Cup for Removal

NIO-TLSUCTION

Assist removing trimless downlight from finished ceiling after installation. For maintenance on trimless downlight.