

NMRG2

Flanged High Lumen LED Gimbal Multiple Lighting Housing

Source: 16W to 30W LED

900lm to 2500lm per head

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

Multi-lamp functionality and architectural aesthetics define Nora Lighting's recessed LED Multiple Lighting System. The recessed family of fixtures are available in one to three lamp linear configurations. The fixture fascia is slightly recessed above the ceiling line, creating a stylish coffered ceiling design. Each LED can independently rotate 360° and adjust vertically 35°. A variety of fully adjustable trims are offered for independent aiming of each lamp.

CONSTRUCTION

Housing: 0.35" galvanized steel with louver-type ventilation openings for proper heat dissipation. Contains six 3/4" knockouts for electrical entry to the wiring compartment are available. A 0.35" thick steel cover secured by wing nuts encloses all lamp connections inside the housing.

Installation: Universal brackets accept 25" C-Channel Bar Hangers (NRA-38), 27" flat bar hangers (NRA-28), 24-1/2" bar hangers with captive nails (NRA-60), or simple rigid 1/2" steel conduit for tie-down to ceilings grids. Purchased separately.

Minimum Clearance: Requires a minimum clearance of 3" from thermal insulation and 1/2" from any adjacent building components.

Quick Connect: Each driver has a lead with quick connect. The quick connect easily attaches to quick connect of the LED module. Drivers can be supplied with a single supply or individual supply line for independent control.

Thermal Protector: Standard UL thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing allow greater airflow.

ELECTRICAL

Input Voltage: 120V or 120-277V (must specify)

Lumens / Wattage Per Head: L09 = 900lm / 16W; L15 = 1500lm / 18W; L25 = 2500lm / 27W

Operating Temperature: 0°C to 45°C

Dimming: Triac, ELV or 0-10V dimming (must specify)

[Click Here](#) or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab

COMPATIBLE TRIMS

CATALOG NO.	DESCRIPTION
NMRT2-1J	One-Head Regressed Face Trim
NMRT2-1F1	One-Head Flat Face Trim
NMRT2-1J2	Two-Head Regressed Face Trim
NMRT2-1F2	Two-Head Flat Face Trim
NMRT2-1J3	Three-Head Regressed Face Trim
NMRT2-1F3	Three-Head Flat Face Trim

OPTIONAL ACCESSORIES

Multiple lighting housings are compatible with bar hangers ordered separately


Catalog No.	Description
NRA-28/0.5IN	(2) 27" Flat Bar Hangers
NRA-38	(2) 25" C-Channel Bar Hangers
NRA-60	(2) 24-1/2" Bar Hangers

LABELS AND LISTINGS

- cULus Listed for damp locations
- 5-Year Limited Warranty



PRODUCT IMAGES AND DIMENSIONS

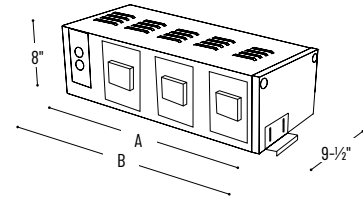

Dimensions	Length (A)	Length w/ Bracket (B)	Ceiling Cut-Out
1 Head	9-1/2"	10-1/2"	8-1/2" x 8-1/2"
2 Head	18"	19"	17" x 8-1/2"
3 Head	23-1/2"	24-1/2"	22-1/2" x 8-1/2"

Flanged High Lumen LED Gimbal Multiple Lighting Housing

Number of Heads	Driver	Lumens / Wattage Per Head
NMRG2-11 = One Head	D3 = 120V Input; Triac / ELV / 0-10V dimming	L09 = 900lm / 16W
NMRG2-12 = Two Heads	D6 = 120-277V Input; 0-10V dimming	L15 = 1500lm / 18W
NMRG2-13 = Three Heads		L25 = 2500lm / 27W

Optional Accessories

Description
NRA-28/0.5IN = (2) 27" Flat Bar Hangers
NRA-38 = (2) 25" C-Channel Bar Hangers
NRA-60 = (2) 24-1/2" Bar Hangers

Example: **NMRG2-12D3L25** = Two Head Flanged High Lumen LED Gimbal Multiple Lighting Housing, 120V input; 2500lm / 30W per head