

NOXAC-432

4" AC Onyx LED Retrofit Baffle

Source: 10.5W or 15W

Up to 700lm or 1000lm

PRODUCT DESCRIPTION

4" AC Onyx Retrofit Series requires no driver and allow for a sleek design. Spun aluminum construction provides clean sharp edges and is suitable for use with most 4" recessed housings. Deep regressed optics and round aperture deliver even and glare-free illumination.

FEATURES

- Up to 700 or 1000 delivered lumens
- 2700K, 3000K, 3500K, 4000K or 5000K @ 90+ CRI
- Dimmable AC LED
- Includes medium base socket adapter for easy retrofitting in 4" recessed housings
- Quick connector is compatible with dedicated LED housings
- 5-year limited warranty
- Classified for wet locations
- ENERGY STAR certified

SPECIFICATION

Reflector: One piece, spun aluminum construction dissipates heat and extends life. Unitized Thermal Management, UTM, provides exceptional cool operation.

Mounting: Two steel, spring mounting blades allow for easy and secure mounting in most 4" housings.

Retrofit: Luminaires include a medium base screw-socket adapter ([NRA-21ISM](#)) for retrofitting into medium base downlight housings. Intended to be used as a LED lamp replacement. GU24 socket adapter ([NRA-212SM](#)) is available.

ELECTRICAL	(blank)	/HL
Input Voltage	120VAC	
Frequency	60Hz	
Input Power	10.5W	15W
Color Temperature	3500K, 4000K, 5000K	2700K, 3000K, 3500K, 4000K, 5000K
Dimming	Triac / ELV	
Operating Temp.	35°C max.	25°C max.

COMPATIBLE HOUSINGS

Onyx retrofits are compatible with most 4" IC and Non-IC housings by Nora and others.

Fire Box

- [NFBIC-4LMRATA*](#) IC Air-Tight Dedicated LED Firebox
- [NFBIC-427LMRATA*](#) Shallow ICAT Dedicated LED Firebox
- [NFBIC-4INCATA](#) IC Air-Tight Line Voltage Firebox

New Construction

- [NHRIC-4LMRAT*](#) IC Air-Tight Dedicated LED
- [NHIC-4LMRAT/277*](#) ICAT Dedicated LED, 277V (includes step-down transformer)
- [NHICCP-4LMRAT*](#) Chicago Plenum Dedicated LED
- [NHIC-427LMRAT*](#) Shallow IC Air-Tight Dedicated LED
- [NSIC-401QAT](#) IC Air-Tight Line Voltage
- [NS-401QAT](#) Air-Tight Line Voltage
- [NHIC-4G24AT](#) IC Air-Tight GU24

Remodel

- [NHRIC-4LMRAT*](#) IC Air-Tight Dedicated LED
- [NHRIC-427LMRAT*](#) Shallow IC Air-Tight Dedicated LED
- [NSR-404QAT](#) Air-Tight Line Voltage
- [NSRIC-404QAT](#) IC Air-Tight Line Voltage

* Nora LED Dedicated housings are listed for use only with Nora LED Retrofits.

ACCESSORIES

- [NOX-4EYELIDW](#): White round eyelid used to convert round reflector or baffle to half moon wall wash trim.
- [NOX-4OR-W](#): White round oversize ring used to cover ceiling cut-outs up to 5-7/8".

LABELS AND LISTINGS

- 700lm luminaires are cULus classified for Wet Locations
- 1000lm luminaires are eTLus classified for Wet Locations
- ENERGY STAR certified
- 5-Year Limited Warranty
- Meets ASTM-E283 Air-Tight requirements
- FCC compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2022



Type

Project

Catalog No.




Notes

Performance Data

Part Number	(blank) Lumens	/HL Lumens	CCT
NOXAC-43127WW	-	971lm	2700K
NOXAC-43130WW	-	952lm	3000K
NOXAC-43135WW	723lm	969lm	3500K
NOXAC-43140WW	714lm	1025lm	4000K
NOXAC-43150WW	733lm	1018lm	5000K

Delivered lumens will vary depending on trim type

PRODUCT IMAGES AND DIMENSIONS

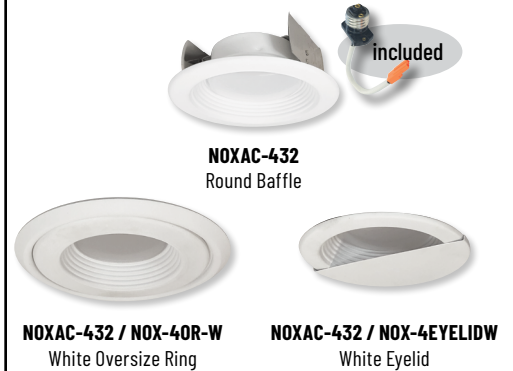

4" AC Onyx LED Retrofit Baffle

Lumens / Wattage / Color Temperature / Finish

- NOXAC-43235WW** = 723lm / 10.5W / 3000K, White
- NOXAC-43240WW** = 714lm / 10.5W / 3000K, White
- NOXAC-43250WW** = 733lm / 10.5W / 3000K, White
- NOXAC-43227WW/HL** = 971lm / 15W / 2700K, White
- NOXAC-43230WW/HL** = 952lm / 15W / 3000K, White
- NOXAC-43235WW/HL** = 969lm / 15W / 3500K, White
- NOXAC-43240WW/HL** = 1025lm / 15W / 4000K, White
- NOXAC-43250WW/HL** = 1018lm / 15W / 5000K, White

Optional Accessories

Description

- NOX-4EYELIDW** = 4" Round White Eyelid
- NOX-4OR-W** = 4" Round White Oversize Ring
- NRA-21ISM** = Medium base screw-in socket (included w/ each)
- NRA-212SM** = Socket adapter for use with GU24 housings

Example: **NOXAC-43230WW/HL** = 4" AC Onyx LED Round Retrofit Baffle, 3000K, White Baffle / White Flange, 952lm / 15W

NOXAC-432

4" AC Onyx LED Retrofit Baffle Accessories

Type	_____
Project	_____
Catalog No.	_____
Notes	_____



Onyx Eyelid

NOX-4EYELIDW

Round eyelid clips on reflector or baffle to convert into half moon wall wash.

White



Onyx Oversize Ring

NOX-4OR-W

Round oversize ring covers large ceiling cut-outs up to 5-7/8".

White



Medium Base Screw-In Socket

NRA-211SM

Medium base screw-in socket adapter for retrofitting into existing medium base housings. One is included with each luminaire.



Socket Adapter for GU24 Housings

NRA-212SM

GU24 socket adapter for retrofitting into existing GU24 housings.