

# NOXAC-5632

## 5"/6" AC Onyx LED Retrofit Baffle

Source: 12.5W or 15.5W

Up to 850lm or 1150lm

### PRODUCT DESCRIPTION

5"/6" AC Onyx Retrofit Series requires no driver and allow for a sleek design. Spun aluminum construction provides clean sharp edges and is suitable for use with most 5" and 6" recessed housings. Deep regressed optics and round aperture deliver even and glare-free illumination.

### FEATURES

- Up to 850 or 1150 delivered lumens
- 2700K, 3000K, 3500K, 4000K or 5000K @ 90+ CRI
- Dimmable AC LED
- Includes medium base socket adaptor for easy retrofitting in 5" or 6" recessed housings
- 5-year limited warranty
- ENERGY STAR certified
- Classified for wet locations

### SPECIFICATION

**Reflector:** One piece, spun aluminum construction dissipates heat and extends life. Unitized Thermal Management, UTM, provides exceptional cool operation.

**Housings:** Compatible with most 5" and 6" IC and non-IC housings by Nora and others.

**Mounting:** Two steel, torsion mounting springs allow for easy and secure mounting in most 5" and 6" housings.

**Retrofit:** Luminaires include a medium base screw-socket adapter ([NRA-21ISM](#)) for retrofitting into medium base downlight housings. Intended to be used as a LED lamp replacement. GU24 socket adapter ([NRA-212SM](#)) is available.

| ELECTRICAL               | (blank)             | /HL                               |
|--------------------------|---------------------|-----------------------------------|
| <b>Input Voltage</b>     | 120VAC              |                                   |
| <b>Frequency</b>         | 60Hz                |                                   |
| <b>Input Power</b>       | 12.5W               | 15.5W                             |
| <b>Color Temperature</b> | 3500K, 4000K, 5000K | 2700K, 3000K, 3500K, 4000K, 5000K |
| <b>Dimming</b>           | Triac / ELV         |                                   |
| <b>Operating Temp.</b>   | 35°C max.           | 35°C max.                         |

### COMPATIBLE HOUSINGS

Onyx retrofits are compatible with most 5" & 6" IC and Non-IC housings by Nora and others.

#### Fire Box

- [NFBC-5INCATA](#) 5" ICAT Fire Box
- [NFBC-5LMRATA\\*](#) 5" ICAT Dedicated LED Fire Box
- [NFBC-6INCATA](#) 6" ICAT Fire Box
- [NFBC-6LMRATA\\*](#) 6" ICAT Dedicated LED Fire Box

#### New Construction

- [NHIC-5LMRAT\\*](#) 5" ICAT Dedicated LED
- [NHIC-5LMRAT/277\\*<sup>1</sup>](#) 5" ICAT Dedicated LED, 277V
- [NHIC-527LMRAT\\*](#) 5" ICAT Shallow Dedicated LED
- [NHIC-501QAT](#) 5" ICAT Line Voltage
- [NHIC-527QAT](#) 5" ICAT Shallow Line Voltage
- [NH-501Q](#) 5" Line Voltage
- [NHIC-5G24ATFL](#) 5" ICAT GU24
- [NHIC-6LMRAT\\*](#) 6" ICAT Dedicated LED
- [NHIC-6LMRAT/277\\*<sup>1</sup>](#) 6" ICAT Dedicated LED, 277V
- [NHICCP-6LMRAT\\*](#) 6" Chicago Plenum Dedicated LED
- [NHIC-27LMRAT\\*](#) 6" ICAT Shallow Dedicated LED
- [NHIC-17QAT](#) 6" ICAT Line Voltage
- [NHIC-17QNBAT](#) 6" ICAT Line Voltage (No Bracket)
- [NHIC-27QAT](#) 6" ICAT Shallow Line Voltage
- [NH-26Q](#) 6" Line Voltage
- [NHIC-6G24ATFL](#) 6" ICAT GU24

#### Remodel

- [NHRIC-5LMRAT\\*](#) 5" ICAT Dedicated LED
- [NHRIC-527LMRAT\\*](#) 5" ICAT Shallow Dedicated LED
- [NHRIC-504QAT](#) 5" ICAT Line Voltage
- [NHRIC-527QAT](#) 5" ICAT Shallow Line Voltage
- [NHR-504Q](#) 5" Line Voltage
- [NHRIC-6LMRAT\\*](#) 6" ICAT Dedicated LED
- [NHRIC-27LMRAT\\*](#) 6" ICAT Shallow Dedicated LED
- [NHRIC-17QAT](#) 6" ICAT Line Voltage
- [NHRIC-17QNBAT](#) 6" ICAT Line Voltage (No Bracket)
- [NHRIC-27QAT](#) 6" ICAT Shallow Line Voltage
- [NHR-26Q](#) 6" Line Voltage

\* Nora LED Dedicated housings are listed for use only with Nora LED Retrofits.

<sup>1</sup> Housings include a step down transformer

### LABELS AND LISTINGS

- 850lm luminaires are cULus classified for Wet Locations
- 1150lm luminaires are cETLus classified for Wet Locations
- ENERGY STAR certified
- [5-Year Limited Warranty](#)
- Meets ASTM-E283 Air-Tight requirements
- FCC compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2022



Type

Project

Catalog No.


Notes

### Performance Data

| Part Number           | (blank) Lumens | /HL Lumens | CCT   |
|-----------------------|----------------|------------|-------|
| <b>NOXAC-56327WW</b>  | -              | 1144lm     | 2700K |
| <b>NOXAC-563130WW</b> | -              | 1111lm     | 3000K |
| <b>NOXAC-563135WW</b> | 824lm          | 1071lm     | 3500K |
| <b>NOXAC-563140WW</b> | 869lm          | 1162lm     | 4000K |
| <b>NOXAC-563150WW</b> | 862lm          | 1146lm     | 5000K |

*Delivered lumens will vary depending on trim type*

### PRODUCT IMAGES AND DIMENSIONS

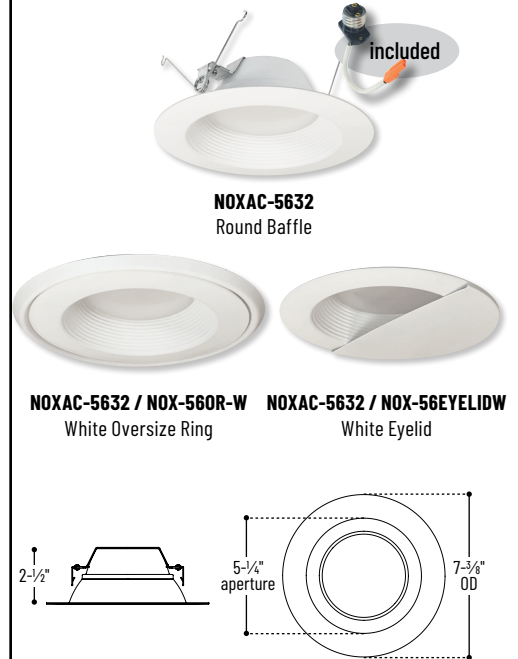

## 5"/6" AC Onyx LED Retrofit Baffle

Lumens / Wattage / Color Temperature / Finish

- NOXAC-563227WW/HL** = 1150lm / 15.5W / 2700K / White
- NOXAC-563230WW/HL** = 1150lm / 15.5W / 3000K / White
- NOXAC-563235WW** = 850lm / 12.5W / 3500K / White
- NOXAC-563235WW/HL** = 1150lm / 15.5W / 3500K / White
- NOXAC-563240WW** = 850lm / 12.5W / 4000K / White
- NOXAC-563240WW/HL** = 1150lm / 15.5W / 4000K / White
- NOXAC-563250WW** = 850lm / 12.5W / 5000K / White
- NOXAC-563250WW/HL** = 1150lm / 15.5W / 5000K / White

## Optional Accessories

Description

- NOX-56EYELIDW** = 5"/6" Round White Eyelid
- NOX-56OR-W** = 5"/6" Round White Oversize Ring
- NRA-21ISM** = Medium base screw-in socket (included w/ each)
- NRA-212SM** = Socket adapter for use with GU24 housings

Example: **NOXAC-563230WW/HL** = 5"/6" AC Onyx, Round Baffle LED Retrofit, 3000K, White Baffle / White Flange, 1150lm / 15.5W

# NOXAC-5632

5"/6" AC Onyx Retrofit Baffle Accessories

|             |       |
|-------------|-------|
| Type        | _____ |
| Project     | _____ |
| Catalog No. | _____ |
| Notes       | _____ |



Onyx Eyelid

**NOX-56EYELIDW**

White

Round eyelid clips on reflector or baffle to convert into half moon wall wash



Onyx Oversize Ring

**NOX-56OR-W**

White

Round oversize ring covers large ceiling cut-outs up to 8-1/4"



Medium Base Screw-In Socket

**NRA-211SM**

Medium base screw-in socket adapter for retrofitting into existing medium base housings. One is included with each luminaire.



Socket Adapter for GU24 Housings

**NRA-212SM**

GU24 socket adapter for retrofitting into existing GU24 housings.