

NULS-LED Series

LED Linear Under Cabinet

Source: 5W / 525lm per foot

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

Low profile slim under cabinet fixtures ranging in length from 11" to 45". NULS LED is an economical way to provide linear lighting in under cabinet, cove or general lighting applications. 3-Wire system meets most code requirements. Providing bright even illumination the NULS LED is a perfect solution for energy efficient linear lighting.

FEATURES

- Slim low profile construction
- Frosted lens eliminates LED diode image
- 120V linear system
- 525 lumens / 5W per foot
- 2700K, 3000K or 4000K @ 80+ CRI
- Dimmable and linkable
- Mounting hardware and end-to-end connector are included
- cULus Listed

ELECTRICAL

Input Voltage: 120V

Lumens: 525lm per foot

Wattage: 11" = 4W; 21" = 8W; 33" = 12W; 45" = 16W

Color Temperature: 2700K, 3000K or 4000K

CRI: 80+CRI

Operating Temp.: 32°F to 113°F (0° to 45°C)

Lifetime: 60,000 hours @ L70

Maximum Wattage Per Run: 120W

Dimming: Dimmable down to 15% with Triac dimmer

[Click Here](#) or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab.

CONSTRUCTION

Housing: Injection molded plastic construction

Mounting: Mounting hardware is included with each unit. Luminaire has an input and output on opposite ends.

Included with every fixture: (2) mounting brackets and (1) end-to-end connector

ACCESSORIES

NULSA-JBOX: Junction Box (Not UL Listed)

NULSA-106: 6' 3-Wire Cord and Plug

NULSA-272-HWC: 6' 3-Wire Hardwire Power Cord (connects to NULSA-JBOX)

NULSA-211: 8.5" On/Off Switch Cable

NULSA-206: 6" Jumper Cable

NULSA-212: 12" Jumper Cable

NULSA-218: 18" Jumper Cable

NULSA-206-90: 6" 90° Jumper Cable

NULSA-212-90: 12" 90° Jumper Cable

NULSA-218-90: 18" 90° Jumper Cable

NULSA-MTGKIT: Hardware Kit (included with each fixture)

NULSA-MAGMC: Magnetic Mounting Bracket (Set of 2)

LABELS AND LISTINGS

· cULus Listed for Dry Location


· [5-Year Limited Warranty](#)



PRODUCT IMAGES AND DIMENSIONS



Mounting brackets and coupler are included
(NULSA-MTGKIT)

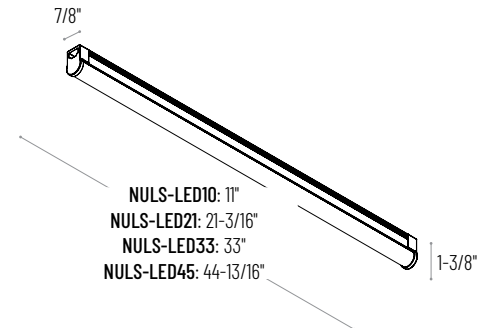

NULS LED Linear Under Cabinet

Series	Length / Wattage	CCT	Finish
NULS-LED	10 = 11" / 4W	27 = 2700K	W = White
	21 = 21" / 8W	30 = 3000K	
	33 = 33" / 12W	40 = 4000K	
	45 = 45" / 16W		

Optional Accessories

Description
NULSA-JBOX = Junction Box (Not UL Listed)
NULSA-106 = 6' 3-Wire Cord and Plug
NULSA-272-HWC = 6' 3-Wire Hardwire Power Cord
NULSA-211 = 8.5" On/Off Switch Cable
NULSA-206 = 6" Jumper Cable
NULSA-212 = 12" Jumper Cable
NULSA-218 = 18" Jumper Cable
NULSA-206-90 = 6" 90° Jumper Cable
NULSA-212-90 = 12" 90° Jumper Cable
NULSA-218-90 = 18" 90° Jumper Cable
NULSA-MTGKIT = Hardware Kit (included with ea. fixture)
NULSA-MAGMC = Magnetic Mounting Brackets (Set of 2)

Example: **NULS-LED2130W** = 21" NULS LED Linear, 8W, 3000K, White Finish

NULS-LED Accessories

LED Linear Under Cabinet
Source: 5W / 525lm per foot

Type
Project
Catalog No.
Notes



Junction Box

NULSA-JBOX

Used to power NULS-LED series using Jumper Cables or NULSA-272-HWC Hardwire Connector.
(Not UL Listed)



6' 3-Wire Cord and Plug

NULSA-106

Convert NULS-LED series from hardwire to direct plug-in units.



6' 3-Wire Hardwire Power Cord

NULSA-272-HWC

Used to hardwire junction box (NULSA-JBOX)



8.5' 3-Wire On/off switch Cable

NULSA-211

Used to turn on NULS-LED fixtures.



Jumper Cable

NULSA-206 6"
NULSA-212 12"
NULSA-218 18"
Used to join NULS-LED fixtures together or connect to junction box (NULSA-JBOX).



90° Jumper Cable

NULSA-206-90 6"
NULSA-212-90 12"
NULSA-218-90 18"
Used to join NULS-LED fixtures together at a 90° angle or connect to junction box (NULSA-JBOX).



Hardware Kit (included w/fixture)

NULSA-MTGKIT
Hardware kit included with each luminaire. Consist of (2) mounting brackets and (1) end-to-end connector.



Magnetic Mounting Brackets

NULSA-MAGMC Set of Two
Used to mount NULS-LED series to metal surface.