

# NUTP4 Series

12V Standard Silicone Encapsulated LED Tape Light

Source: 1.5W/ft. LED  
100lm/ft.

Type
Project
Catalog No.
Notes

## PRODUCT DESCRIPTION

LED Tape Light is a perfect solution for your LED linear lighting needs. This energy efficient and very low profile LED Tape is great for use in cove lighting, architectural enhancements, under cabinet or many more discreet locations. This flexible LED light source is a durable silicone encapsulated tape, cULus Listed for Damp Location applications. Available in a roll, kit, or sections. Each roll or kit comes with (16) 12" sections linked together.

## FEATURES

- Available in 16' kit, 16' roll, 12" section, and 4' section
- 100 lumens per foot
- Separable every 12", easily disconnected and connected without soldering
- Field cuttable every 2" or 3 LEDs
- Easy to install; pre-applied 3M™ tape or 15 acrylic mounting clips (included with roll/kit)
- Three available colors: Blue, Cool White (4200K) or Warm White (3000K)
- No soldering or additional wiring is required

## INCLUDED WITH EVERY 16' ROLL

(1) 16' Tape Light Roll with 12" separable sections, (15) Acrylic Mounting Clips with screws [NATL-401], and (1) 9" Power Line Interconnector [NATL-515].

## INCLUDED WITH EVERY 16' KIT

(1) 16' Tape Light Roll, (15) Acrylic Mounting Clips with screws [NATL-401], (1) 9" Power Line Interconnector [NATL-515], (5) Shrink Wrap Tubes [NATL-400] and (1) 24W Plug-In Driver [NAPK-524/12].

## SPECIFICATION

**Construction:** The silicone encapsulated tape can be cut every 2" or 3 LEDs at marked intervals. Cutting does not effect circuit (shrink wrap tube included for concealment). LED Tape Light is also separable every 12", each connection has pre-installed shrink wrap around power connections to ensure listing. Simply slice the clear shrink wrap at each electrical connection, and separate pieces. This eliminates soldering when using partial rolls. Each roll or kit comes with 9" power line connector [NATL-515].

**Mounting:** Each Tape Light includes pre-applied 3M™ adhesive tape for simple installation. Optional channels and clear acrylic clips are available.

## ELECTRICAL

**Input Voltage:** 12V

**Light Source:** 18 LEDs per foot

**Lumens / Wattage:** 100lm / 1.5W per foot

**Color Temperature:** Blue, 3000K or 4200K

**Color Rendering Index:** 90+ CRI

**Life Expectancy:** 50,000 hours

**Dimming:** Dimmable with Dimmable LED Driver


**Maximum Run Length:** 32'

## LABELS AND LISTINGS

- cULus Listed for Damp Locations
- 3-Year Limited Warranty



## PRODUCT IMAGES & DIMENSIONS

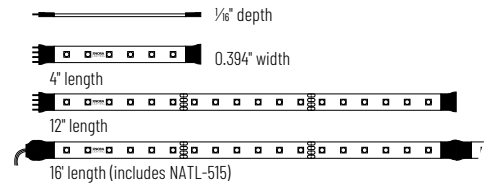

## 12V Standard Silicone Encapsulated LED Tape Light

Length / Finish	CCT / CRI	Section Length
<b>NUTP4-W16LED</b> = 16' Roll / White finish	<b>930</b> = 3000K / 90 CRI <b>942</b> = 4200K / 90 CRI <b>B</b> = Blue	(blank) = 16' Roll
<b>NUTP4-WLED</b> = Section / White finish	<b>930</b> = 3000K / 90 CRI <b>942</b> = 4200K / 90 CRI <b>B</b> = Blue (4" section only)	<b>/4</b> = 4" Section <b>/12</b> = 12" Section
<b>NUTP4-W16LED</b> = 16' Kit / White finish	<b>930K</b> = 3000K / 90 CRI <b>942K</b> = 4200K / 90 CRI	(blank) = 16' Kit

Example: **NUTP4-WLED930/12** = 12" 12V Standard LED Tape Light, 3000K / 90 CRI

# NUTP4 Series

## 12V Standard Silicone Encapsulated LED Tape Light Accessories

Type

Project

Catalog No.


Notes



\*Y\* Splitter Cable

**NATL-300W**


Allows splitting the Tape Light from a run or driver, into two separate runs.



X-Splitter Cable

**NATL-301W**

Allows splitting the Tape Light from a run or driver, into three separate runs.



Interconnection Cable

**NATL-202W**

2" Cable

**NATL-206W**

6" Cable

**NATL-218W**

18" Cable

**NATL-236W**

36" Cable

**NATL-272W**

72" Cable

Allows easy linking of two Tape Light sections. Cables are flexible and can be moved in any direction, or be joined together for custom lengths.




Power Line Interconnector

**NATL-509W**

9" Cable

Connects any Tape Light run to a driver. (1) Power line interconnector is included with every Tape Light roll/kit.



Power Line Interconnector with On/Off Switch

**NATL-511W**

11" Cable

Allows individual switching on any Tape Light run, and connect LED Tape Light run directly to LED Driver.



Shrink Wrap Tube

**NATL-400**

Pack of 5

Seals connection made in the field. Necessary to maintain cULus listing. Two shrink wrap tubes are included with every Tape Light roll and section.



End Cap

**NATL-403**

**NATL-403W**

Black

White

Covers open end of Tape Light.




Clear Acrylic Mounting Clips

**NATL-401**

Pack of 15

Use in conjunction with adhesive backing to attach Tape Light to a surface. Pack of 15 clear acrylic mounting clips are included with every Tape Light roll.



4' Plastic Channel

**NATL-420B**

**NATL-420W**

Black

White

Mounts Tape Light to various surfaces. Tape Light snaps into the channel. Field cuttable.




Mounting Clips for Channels

**NATL-CMC**

Pack of 15

Mounting clips for NATL-C23, NATL-C24 and NATL-C27. Pack includes 15 mounting clips.




4' Shallow Recessed Channel

**NATL-C23A**

Aluminum

Used to mount tape light recessed in a surface. Diffused lens, end caps and mounting hardware are included. Field cuttable.




4' Shallow Recessed Channel

**NATL2-C23A**

Aluminum

Used to mount tape light recessed in a surface. Diffused lens, end caps and mounting hardware are included. Field cuttable.




4' Shallow Channels

**NATL-C24A**

Aluminum

Used to mount tape light to various surfaces. Plastic diffuser and end caps included. Field cuttable.




4' Shallow Channel

**NATL2-C24A**

Aluminum

Used to mount tape light to various surfaces. Diffused lens, end caps and mounting hardware are included. Field cuttable.




4' Deep Recessed Channel

**NATL-C25A**

Aluminum

Used to mount tape light recessed in a surface. Plastic diffuser and end caps included. Field cuttable.




4' Deep Recessed Channel

**NATL2-C25A**

Aluminum

Used to mount tape light recessed in a surface. Diffused lens, end caps and mounting hardware are included. Field cuttable.




4' Deep Channels

**NATL-C26A**

Aluminum

Used to mount tape light to various surfaces. Plastic diffuser and end caps included. Field cuttable.




4' Deep Channel

**NATL2-C26A**

Aluminum

Used to mount tape light to various surfaces. Diffused lens, end caps and mounting hardware are included. Field cuttable.




4' J-Style Channel

**NATL-C27A**

Aluminum

Used to mount tape light to various surfaces. Field cuttable.



4' Corner Channels

**NATL-C28A**

Aluminum

**NATL-C28B**

Black

**NATL-C28W**

White

Plastic diffuser and End caps included. Field cuttable

# NUTP4 Series

12V Standard Silicone Encapsulated LED Tape Light Drivers & Accessories

Type

Project

Catalog No.

Notes



Direct Plug-In LED Driver

**NAPK-524W/12** 12V 24W

**Input Voltage:** 120V  
**Cable Length:** 6 Feet



Direct Plug-In LED Driver

**NAPK-560W/12** 12V 60W

**Input Voltage:** 120V  
**Input Wire:** 4' Cord and Plug  
**Output Wire:** 4' Power line connector



Class II Hardwire LED Driver  
0-10V dimming

**NATL-5060-12-HWD10** 12V 60W

**Input Voltage:** 120-277V  
**Dimming:** 0-10V  
**Includes:** 10' Power Line Connector



Class II Hardwire LED Driver  
ELV dimming

**NAPKED-5040HW** 12V 35W  
**NAPKED-5060HW** 12V 60W

**Input Voltage:** 120V  
**Dimming:** Triac or ELV  
**Includes:** 10' Power Line Connector



Class II Hardwire LED Driver  
with Breakers, MLV dimming

**NMT-244/12C2D1** 120V/12V  
**NMT-244/12C2D1** 277V/12V


**Input Voltage:** 120V or 277V  
**Dimming:** Magnetic Low Voltage  
**Breakers:** (4) 60W  
**Note:** Power Line Connector(s) not included



Class II Hardwire LED Driver  
with Regulator, MLV dimming

**NMTD-40/12D** 12V 40W  
**NMTD-60/12D** 12V 60W

**Input Voltage:** 120-277V  
**Dimming:** Magnetic Low Voltage  
**Regulator:** Integral regulator for constant current and voltage  
**Includes:** 10' Power Line Connector



NEXUS® All-in-One LED Driver and  
Dimmer

**NATL-SWEX60/12A** 12V 60W

**Input Voltage:** 120V  
**Dimming:** Integral Dimmer  
**Description:** Eliminates the driver and allows 120V input and 12V output from a single gang box. 100-5% dimming and on/off switch.




Power Line Connector

**NALT-10** 10' Power Line  
**NALT-30** 30' Power Line

For use with Class II drivers. Carries output from driver, requires power line interconnectors.

**NATL-302W** 5" Splitter

Splits power line connector into two separate leads, requires power line cable.



Touch Dimmer with Memory

**NATL-518W**

72W max., no power fail memory, touch on/off and hold to dim.



Low Voltage Splice Box

**NATL-415W**

Use to join low voltage lead to power line connector.



Terminal/Splitter Block

**NATL-407** 4-Way

2-3/8"L x 1-1/8"W x 3/8"D

**NATL-408** 8-Way

4"L x 1-1/8"W x 3/8"D



Wire Clip, Plastic - 10pk

**NATL-404W**

**NATL-405W**

**NATL-406W**

J-Clip  
Over the Wire  
Square Clip



2' Wire Raceway

**NATL-422B**

**NATL-422W**

Black  
White

Field-cutable plastic. Includes wire channel with double faced tape and cover.