

Specification Submittal Data / Panasonic Ventilation Fan

Description:

The WhisperVent™ Wall Cap shall be designed for use with WhisperComfort® 60 ERV and Intelli-Balance® 100 Series ERV. The optional Exterior Wall Cap accessory shall allow both exhaust and supply airflow through a single 7.5" hole in the building envelope. The dividers inside the bottom portion of the unique Y shape chamber and the wall cap shall prevent cross contamination. Air flow shall be rated up to 100 CFM per side.

Material:

The material composition shall be EPS (Expanded Polystyrene) for the duct, and PP (Polypropylene) for the cap.

Dimensions:



The duct length shall be 26-7/8"; the center to center "Y" measurement shall be 8-3/8" and shall have overall width 15 9/16"; the cap height shall be 10-3/8" and depth of 4-15/16".

Warranty:

The warranty shall be 3 years.

Arch specifications:

The WhisperVent™ Wall Cap shall be designed for use with WhisperComfort® 60 ERV and Intelli-Balance® 100 Series ERV. The optional Exterior Wall Cap accessory shall allow both exhaust and supply airflow through a single 7.5" hole in the building envelope. The dividers inside the bottom portion of the unique Y shape chamber and the wall cap shall help prevent cross contamination. Air flow shall be rated up to 100 CFM per side. The material composition shall be EPS (Expanded Polystyrene) for the duct, and PP (Polypropylene) for the cap. The duct length shall be 26-7/8"; the center to center "Y" measurement shall be 8-3/8" and shall have overall width 15 9/16"; the cap height shall be 10-3/8" and depth of 4-15/16".

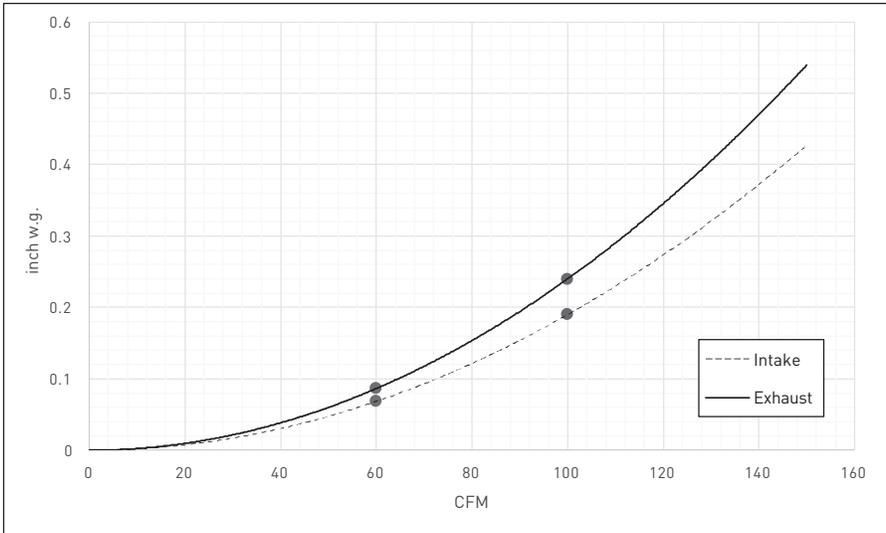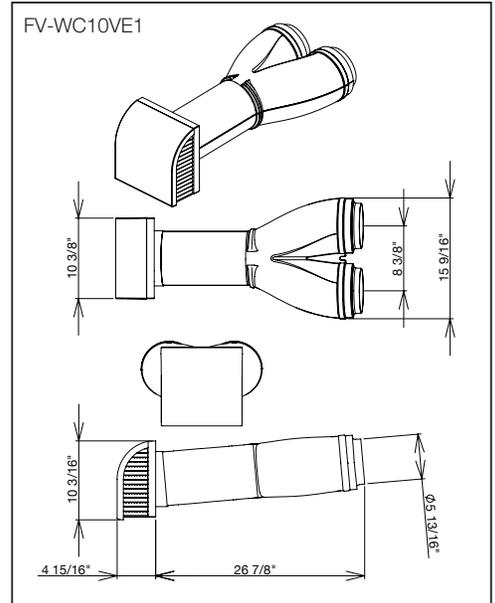

Panasonic		
Model No.	FV-WC10VE1	
Pressure drops intake (inch w.g.)*	60	0.07
	100	0.19
Pressure drops exhaust (inch w.g.)*	60	0.09
	100	0.24

*measured value

Panasonic
IAQ Division
Two Riverfront Plaza
Newark, NJ 07102

na.panasonic.com/us/iaq



IAQ23090ST