

Project: Type:

Prepared By: Date:

UPC: 192552007368

Weight: 0.0 lbs

Technical Specifications

Performance

Product Type:

Decorative

Input Wattage:

5W

Lumens (Nominal):

450lm

Efficacy:

90lm/W

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:

40W Incandescent

Compliance

UL Listed:

Suitable for wet locations. Suitable for use in enclosed fixtures.

Enclosed Fixtures:

Suitable for use in enclosed fixtures

LED Characteristics

Color Temperature:

2700K

Color Accuracy (CRI):

>90 CRI

Electrical

Power Factor:

>0.7

Dimmable:

Yes, down to 10%

Flicker:

<30%

Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

Input Voltage:

120V

Operating Frequency:

60 Hz

Construction

Bulb Shape:

A15

Base Type:

E26 Edison

Endcap Material:

Aluminum

Enclosure Material:

Glass

Optical

Beam Angle:

360°

Other

Warranty:


RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	9	6.8	5
PALLET	0	0	0	0

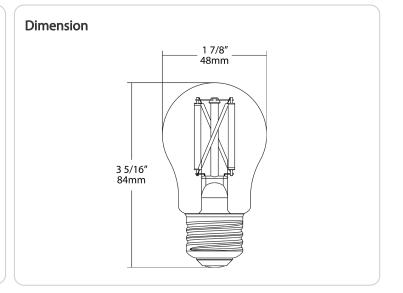

Features

Replacement for conventional decorative lamps

Filament LED construction gives a unique traditional look and feel for decorative and ambient applications

Produces rich and vibrant colors, >90CRI

Rated for use in enclosed and open fixtures in dry and damp locations

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

ENERGY STAR Compliant, UL Listed

Smooth uniform dimming down to 10% (See Dimmer Compatibility List)

Ordering Matrix

