



Color: Bronze

Weight: 24.2 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

Type	Constant Current	Watts	375/300/240W
120V	3.01A/2.41A/1.93A	Color Temp	3000/4000/5000K
208V	1.74A/1.39A/1.11A	Color Accuracy	82-84 CRI
240V	1.57A/1.25A/1.00A	L70 Lifespan	100,000 Hours
277V	1.40A/1.12A/0.90A	Lumens	38,363-58,208 lm
Input Watts	236.8-374W	Efficacy	151.6-166.4 lm/W

**Technical Specifications****Compliance****UL Listed:**

Suitable for wet locations

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: S-GHTX3W (Outdoor Pole/Arm-Mounted Area and Roadway Luminaires)S-VPRKNT (Architectural Flood and Spot Luminaires)

**Electrical****Driver:**

375W: Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 3.01A, 208V: 1.74A, 240V: 1.57A, 277V: 1.40A  
 300W: Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 2.41A, 208V: 1.39A, 240V: 1.25A, 277V: 1.12A  
 240W: Constant Current, Class 1, 120-277V, 50/60 Hz, 120V: 1.93A, 208V: 1.11A, 240V: 1.00A, 277V: 0.90A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

**Surge Protection:**

6kV

**Performance****Lifespan:**

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**Construction****IES Classification:**

The Type IV distribution (also known as a Forward Throw) is especially suited for mounting on the sides of buildings and walls, and for illuminating the perimeter of parking areas. It produces a semicircular distribution with essentially the same candlepower at lateral angles from 90° to 270°.

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

**Lens:**

Polycarbonate lens

**Housing:**

Die-cast aluminum housing, lens frame and mounting arm

**Vibration Rating:**

3G vibration rating per ANSI C136.31

**Technical Specifications (continued)****Effective Projected Area (Without Shield):**

1 Fixture: 0.8 ft<sup>2</sup>  
 2 Fixtures at 90°: 1.18 ft<sup>2</sup>  
 2 Fixtures at 180°: 1.6 ft<sup>2</sup>  
 3 Fixtures at 90°: 1.98 ft<sup>2</sup>  
 4 Fixtures at 90°: 1.98 ft<sup>2</sup>

**Effective Projected Area (With Shield):**

1 Fixture: 0.84 ft<sup>2</sup>  
 2 Fixtures at 90°: 1.59 ft<sup>2</sup>  
 2 Fixtures at 180°: 1.68 ft<sup>2</sup>  
 3 Fixtures at 90°: 2.43 ft<sup>2</sup>  
 4 Fixtures at 90°: 2.43 ft<sup>2</sup>

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**LED Characteristics****LEDs:**

Long-life, high-efficiency, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Installation****Mounting:**

Universal mounting arm compatible for hole spacing patterns from 1" to 5 1/2" center to center. Round Pole Adaptor plate included as a standard. Easy slide and lock to mount fixture with ease. Round pole diameter must be >4" to mount fixtures at 90° orientation.

**Optical****BUG Rating:**

B5 U0 G5

**Other****5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Lightcloud****Lightcloud Blue:**

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - N1XMLOEATBA (Interior);  
 NHCZ2BIA17L (Exterior)

Learn more at [www.lightcloud.com](http://www.lightcloud.com).

**Gateway Required:**

No

**Communication Protocol:**

Bluetooth Mesh

**Range:**

Indoor: Up to 60 feet between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction; Up to 200 feet clear line of sight.

Outdoor: Up to 60 feet clear line of sight; Up to 18 feet around corners

**Spacing Criteria:**

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

**Sensor Settings****Sensor Connection Type:**

Pogo pin

**Max Mounting Height:**

50 ft

**Detection Range:**

50 ft diameter mounted at 50 ft

**Sensor Technology:**

Microwave (MVS)

**Default Setting:**

Uncommissioned State:  
 Motion Sensitivity: High  
 Brightness when triggered: 100%  
 Hold time: 20 minutes  
 Standby to dim: 20%  
 Standby time: 1 minute  
 When vacant: Off

**Commissioned State:**

Once paired, the sensor will default to disabled.  
 Once enabled the following settings apply:  
 Motion Sensitivity: High  
 Brightness when triggered: Last on status  
 Hold time: 20 minutes  
 Standby time: 1 minute  
 When vacant: Off

**Adjustable Sensor Settings?:**

Yes, using the Lightcloud Blue mobile app

**Sensing Type:**

Occupancy or Vacancy (option to disable or set as an independent sensor)

**Occupied Actions:**

On or On at a Dim Level

**Vacant Actions:**

Off or On at a Dim Level

**Occupancy Timeout:**

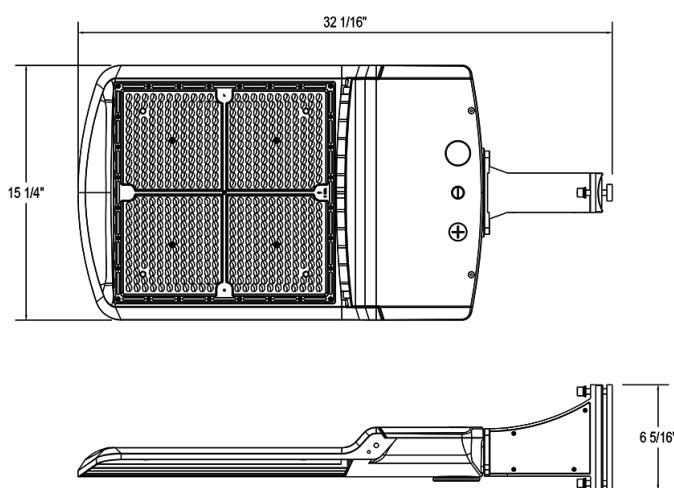
1 minute to 240 minutes

**Daylight Sensing:**

The sensor will determine to trigger the light(s) on or off based on the daylight threshold level set in the Lightcloud Blue mobile app.

**Daylight Threshold:**

150 lux to 1500 lux

**Dimensions****Features**

0-10V Dimming, standard  
100,000-hour LED lifespan  
5-Year, limited warranty

**Ordering Matrix**

Family	Distribution	Wattage/Lumens	Mounting	Color Temp	Finish	Driver	Options
A17	-	4T	375				/LCBS
		<b>4T = Type IV</b> <b>5T = Type V</b> <b>3T = Type III</b>	<b>70 = 70/60/50W</b> <b>100 = 100/80/60W</b> <b>150 = 150/120/100W</b> <b>200 = 200/180/160W</b> <b>300 = 300/240/200W</b> <b>375 = 375/300/240W</b> <b>480 = 480/400/320W</b>	<b>SF = Slipfitter (Factory installed SF available in 150W)</b> <b>Blank = Universal Pole Mount</b>	<b>Blank = 3000/4000/5000K CCT Adjustable</b>	<b>Blank = Bronze</b>	<b>Blank = 120-277V, 0-10V Dimming</b> <b>/480 = 480V, 0-10V Dimming<sup>1</sup></b>
							<b>Blank = No Option</b> <b>/3PRS = 3-pin Receptacle and Shorting Cap</b> <b>/7PRS = 7-pin Receptacle and Shorting Cap</b> <b>/MVS = Microwave Motion Sensor</b> <b>/LCBS = Lightcloud Blue w/PIR Sensor</b> <b>/LCBS/MVS = Lightcloud Blue w/MVS Sensor</b>

<sup>1</sup> 480V driver available standard on 150W and 300W and by special order on 100, 240 and 375W. Not available on 70W or 200W models.

Type II distribution available as special order

Wall mount and adjustable universal pole mount available as optional field-installed accessories