

INSTRUCTIONS


A17 FA AREA LIGHT REVERSIBLE SHIELD INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com



RHS1 for 70/100/150W Models

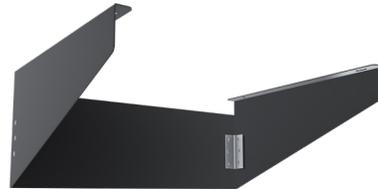

RHS2 for 200/240/300/375W Models

IMPORTANT


READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture.

INSTALLATION

1. Unfold **Shield** as shown in Fig. 1 & 2.
2. Slide the **Shield** onto bottom of **Fixture** as shown in Fig. 3.
3. Secure **Shield** on **Fixture** with (4) **Screws** (*provided*) as shown in Fig. 4.
4. For street side mount option, mount the **Shield** on **Fixture** as shown in Fig. 5.
5. Secure the **Shield** with (4) **Screws** (*provided*) as shown in Fig. 6.

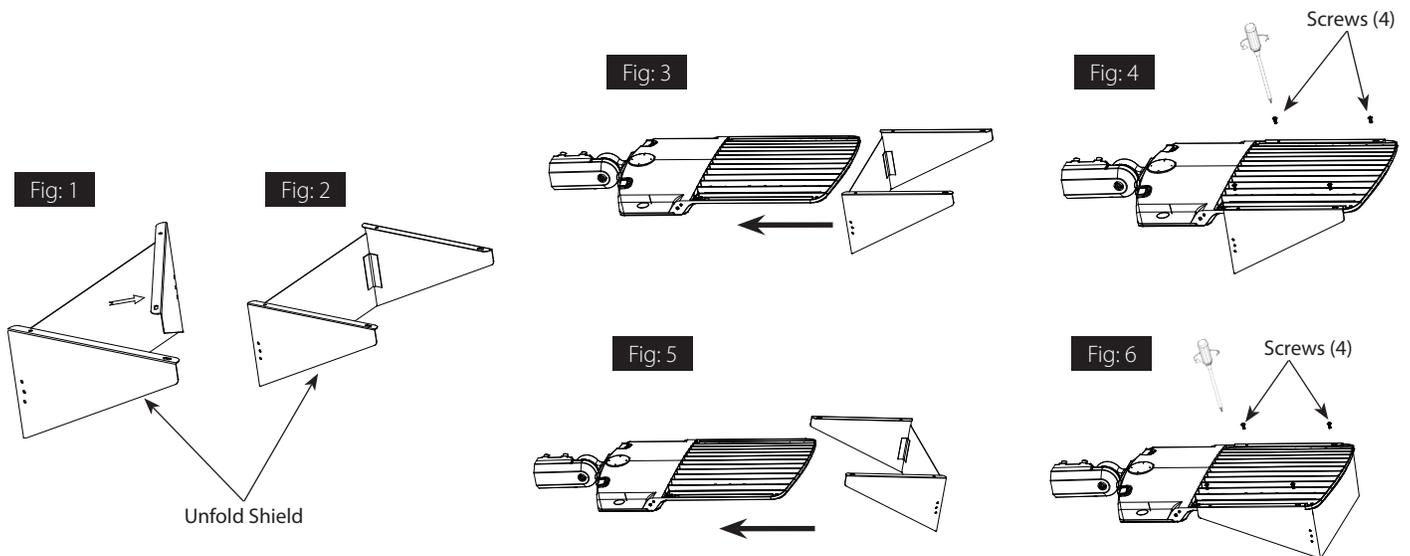

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.



© 2021 RAB LIGHTING Inc.
A17 FA Shield IN-0521
73716-RAB

Easy Answers

rablighting.com
Visit our website for product info

Tech Help Line
Call our experts: 888 722-1000

e-mail
Answered promptly - sales@rablighting.com

Free Lighting Layouts
Answered online or by request