



UPC: 019813700588

Color: White Weight: 0.6 lbs

Project: <input type="text"/>	Type: <input type="text"/>
Prepared By: <input type="text"/>	Date: <input type="text"/>

Technical Specifications

Performance

Product Type:

A-line Contractor Series

Description:

Economical contractor grade A-lamps in convenient pack sizes that eliminate excess waste at the right price.

Wattage Equivalency:

60W Incandescent

Input Wattage:

8.5W

Lumens:

800lm

Efficacy:

94lm/W

L70 Lifespan:

15,000-Hour LED lifespan based on IES LM-70 results

Electrical

THD:

≤20%

Power Factor:

>0.5

Dimmable:

No

Input Voltage:

120V

Operating Frequency:

60 Hz

Input Current @ 120V (mA):

166mA

Operating Temperature:

-4°F to 113°F (-20°C to 45°C)

LED Characteristics

Beam Angle:

230°

Color Temperature:

3000K

Color Accuracy (CRI):

≥80 CRI

R9 Value:

High color performance with R9 no greater than 0

Color Consistency:

<7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Installation

Base Type:

E26 Edison

Construction

Finish:

White

Shape:

A19

Endcap Material:

Metal

Enclosure Material:

Plastic

Lens Finish:

Frosted

Compliance

Listings:

UL Listed

Environment:

Suitable for use in dry and damp environments

Fixture Rating:

Suitable for use in enclosed fixtures

Technical Specifications (continued)

T20 Compliant:
Not compliant

California Title 24 JA8 Compliant:
Not Compliant

California Energy Commission (CEC) Status:
Not Lawful for Sales in California

RoHS:
Mercury and UV free. RoHS-compliant components.

FCC:
Complies with Part 15B of the FCC Rules


Other

3-Year, No-Compromise Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	24	13.5	9.4	5
PALLET	2	42.13	39.37	40.94

Dimension

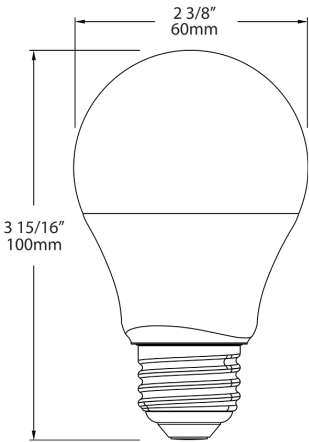

Features

- Energy-efficient replacement for incandescent and halogen lamps
- Durable plastic construction reduces risk of breakage
- Rated for use in enclosed and open fixtures in dry or damp locations
- Frosted lens produces smooth diffuse light
- 6-pack makes it convenient for contractors

Ordering Matrix

Family		Wattage		Base Type		CRI/Color Temp	Dimmable	Pack	Driver
A19	–	8.5	–	E26	–	830	ND	6PK	
		8.5 = 8.5W 10 = 10W 13.5 = 13.5W			E26 = E26 Base	840 = 80 CRI, 4000K 830 = 80 CRI, 3000K 850 = 80 CRI, 5000K	ND = Non-Dimmable DIM = Dimmable	6PK = 6 Pack	Blank = 120V