

Project:	Туре:
Prepared By:	Date:

# **Technical Specifications**

#### Performance

### **Product Type:**

A-Line

#### Input Wattage:

9W

### Wattage Equivalency:

60W Incandescent

# Lumens (Nominal):

840lm

### Efficacy:

80lm/W

#### L70 Lifespan:

15,000 Hours

### Construction

**Bulb Shape:** 

A19

#### **Base Type:**

GU24

### For Use Outdoors in Open Fixtures:

No

## **LED Characteristics**

#### **Color Temperature:**

4000K Cool White

#### Color Accuracy (CRI):

80 CRI

### **Electrical**

### **Power Factor:**

≥0.7

#### **Operating Temperature:**

-20°C to 45°C (-4°F to 113°F)

#### Dimmable:

Yes, down to 10%

## Input Voltage:

120V

## **Operating Frequency:**

60 Hz

#### Optical

### Beam Angle:

230°

## Other

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

# Compliance

## **Energy Star Approved:**

This product is ENERGY STAR® Version 2.0 Certified

#### **Energy Star ID:**

2329337


# California Energy Commission (CEC) Status:

Not Lawful for Sales in California


# **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	15.4	5.2	5
PALLET	2268	47.2	39.4	45.7

# Dimension

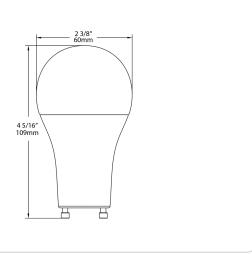



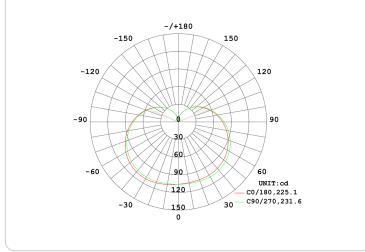

# **Features**

Replacement for High-output Incandescent or lower wattage metal halide and high pressure sodium lamps

Rated for use in enclosed and open fixtures in dry or damp locations

Ideal for post top, bollards, and outdoor corridor lighting

Suitable for use in a base-up or base-down position

# Ordering Matrix

mily	Wattage	Base Type	CRI/Color Temp	Dimmable
.19 -	- 9 -	- GU24 -	- 840 -	- DIM
	<b>5 =</b> 5W	<b>E26</b> = E26 Base	<b>850</b> = 80 CRI, 5000K	<b>DIM</b> = Dimmable
	<b>9 =</b> 9W	<b>GU24</b> = GU24 Base	840 = 80 CRI, 4000K	DIM 120V = Dimmable
	<b>10</b> = 10W		835 = 80 CRI, 3500K	
	<b>13 =</b> 13W		830 = 80 CRI, 3000K	
	<b>15 =</b> 15W		827 = 80 CRI, 2700K	
	<b>16 =</b> 16W			
	<b>23 =</b> 23W			