
A19-9-GU24-930-DIM

RAB Residential

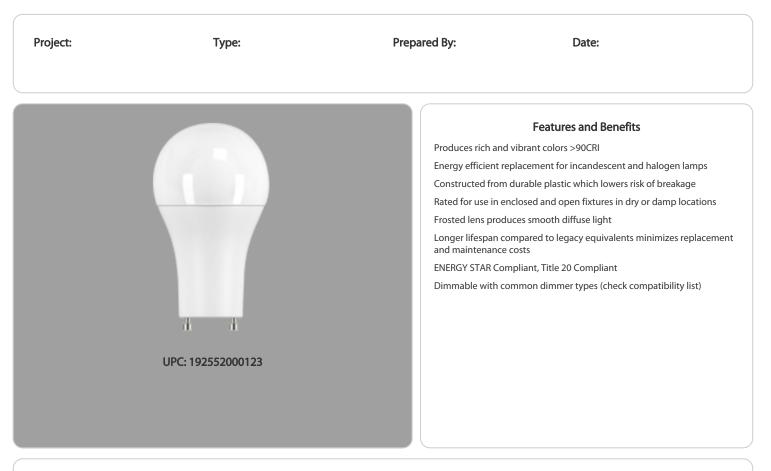

Technical Specifications

Performance

Product Type: A-Line 90CRI Dimmable T20

Description:

Replace conventional general purpose bulbs. Dimmable, 90CRI, enclosed fixture rated and Title 20 compliant.

Wattage Equivalency: 60W Incandescent

Input Wattage: 9W

Lumens (Nominal): 800lm

Efficacy: 89lm/W

L70 Lifespan: 15,000-Hour LED lifespan based on IES LM-70 results

Electrical

Power Factor: >0.9

Dimmable: Yes

Dimming Type: See Dimmer Compatibility List

Input Voltage: 120V

Operating Frequency: 60 Hz

Input Current @ 120V (mA): 85mA

Operating Temperature: -4°F to 113°F (-20°C to 45°C)

Optical Beam Angle: 230° LED Characteristics

Color Temperature: 3000K

Color Accuracy (CRI): ≥90

R9 Value: High color performance with R9 no less than 50

Color Consistency: <4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Construction

Base Type: GU24 Bipin

Finish: White

Bulb Shape: A19

Endcap Material: Nickel-Aluminum

Need help? Tech help line: **(888) 722-1000** Email: **sales@rablighting.com** Website: **www.rablighting.com** Copyright © 2023 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

A19-9-GU24-930-DIM

Technical Specifications (continued)

Enclosure Material:

Plastic

Lens Finish: Frosted

Compliance

Listings: UL Listed

Environment: Suitable for use in dry and damp environments

Fixture Rating: Suitable for use in enclosed fixtures

Energy Star Approved: This product is ENERGY STAR[®] Version 2.2 Certified.

Energy Star ID: 2366071

T20 Compliant:

Can be used to conform with the requirements of California Title 20

California Title 24 JA8 Compliant:

Can be used to conform with the requirements of California Title 24 Part 6

California Energy Commission (CEC) Status:

Lawful for Sales in California

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15B of the FCC Rules

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u>

Note:

All values are typical (tolerance +/- 10%)

A19-9-GU24-930-DIM

RAB[®] Residential

Minimum Compartment Size

| Length x Width x Height [in] | Lamp Quantity | |
|------------------------------|---------------|--|
| 8 | 1 | |

Case and Pallet Dimensions

| | QTY | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE | 0 | 0 | 0 | 0 |
| PALLET | 2160 | 0 | 0 | 0 |

