

INSTRUCTIONS

ALED® (S&M) ROADWAY ARM INSTALLATION



RAB Lighting is committed to creating high-quality, affordable, well-designed and energy-efficient LED lighting and controls that make it easy for electricians to install and end users to save energy. We'd love to hear your comments. Please call the Marketing Department at 888-RAB-1000 or email: marketing@rablighting.com



IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

RAB fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.





CAUTION: For proper weatherproof function all gaskets must be seated properly and all screws inserted and tightened firmly.

ROADWAY ARM MOUNTING

1. The ROADWAY ARM fits a 1", 1.25", 1.5" and 2" Pole Tenon.
2. Unlatch the Arm Door and place the appropriate Pole Mounting Clamp in the Roadway Arm as shown in Fig. 1. The tenon diameter is marked on the Pole Mounting Clamp(s). Slide the Roadway Arm on the Pole Tenon while guiding the wires into the Splice Box (Fig. 2).
3. Secure the Roadway Arm on the pole by tightening the Pole Mounting Clamp with Bolts (provided).

ASSEMBLE THE FIXTURE TO THE ARM

1. Line up the Roadway Arm with the Fixture (Fig. 3) and feed wires from the Fixture into the Splice Box (Fig. 3 and 4). Slide the Fixture onto the Roadway Arm while ensuring wiring is not pinched between Roadway Arm and the Fixture (Fig. 3).
2. Assemble the Lock Washer to the Mounting Bolt and place into Mounting Hole. Secure by tightening the Mounting Bolt (Fig. 3).
3. Make the necessary wire connections inside the Splice Box and knot the wires for strain relief. Push the Arm Door closed to latch.

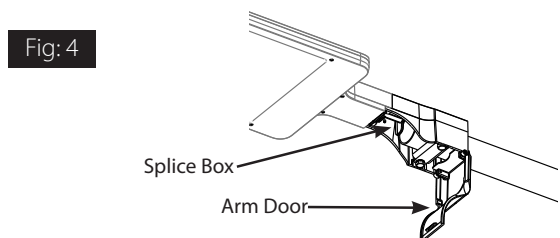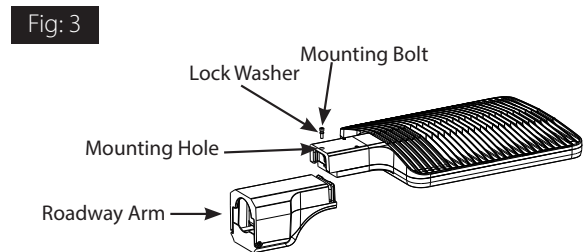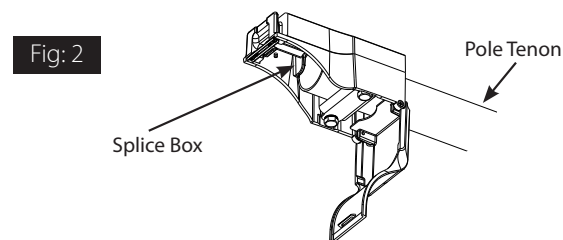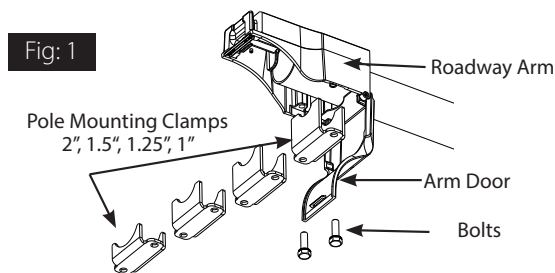

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.



© 2024 RAB LIGHTING Inc.
ALED-RW ARM - IN 0324
P-100903

Easy Answers

rablighting.com
Visit our website for product info

RAB WARRANTY: RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Tech Help Line
Call our experts: 888 722-1000

e-mail
Answered promptly - sales@rablighting.com

Free Lighting Layouts
Answered online or by request