



Color: Black

Weight: 13.2 lbs

|                     |              |
|---------------------|--------------|
| <b>Project:</b>     | <b>Type:</b> |
| <b>Prepared By:</b> | <b>Date:</b> |

| Driver Info |                  | LED Info       |                |
|-------------|------------------|----------------|----------------|
| Type        | Constant Current | Watts          | 60/40W         |
| 120V        | 0.67A            | Color Temp     | Amber          |
| 208V        | 0.40A            | Color Accuracy | N/A            |
| 240V        | 0.34A            | L70 Lifespan   | 100,000 Hours  |
| 277V        | 0.30A            | Lumens         | 4,854/3,770 lm |
| Input Watts | 58.4/40.5W       | Efficacy       | 83.1/93.1 lm/W |

## Technical Specifications

### Field Adjustability

#### Field Adjustable (Wattage):

Field adjustable light output in 2 discrete steps:  
Small Housing: 60W/40W (factory default 60W)

### Compliance

#### UL Listed:

Suitable for wet locations

### IP Rating:

Ingress protection rating of IP66 for dust and water

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, discrete, surface-mount LEDs

### Electrical

#### Driver:

40W: Constant Current, Class 2, 120-277V, 50/60 Hz,  
120V: 0.34A, 208V: 0.20A, 240V: 0.17A, 277V: 0.15A

60W: Constant Current, Class 2, 120-277V, 50/60 Hz,  
120V: 0.50A, 208V: 0.30A, 240V: 0.25A, 277V: 0.22A

80W: Constant Current, Class 2, 120-277V, 50/60 Hz,  
120V: 0.67A, 208V: 0.40A, 240V: 0.34A, 277V: 0.30A

### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

### THD:

3.8% at 120V, 8.07% at 277V

### Power Factor:

99.8% at 120V, 93.3% at 277V

### Surge Protection:

Line to Line: 10kV  
Line to Ground: 6kV

### Performance

#### Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### Wattage Equivalency:

Equivalent to 250W Metal Halide

### Construction

#### IES Classification:

Car Dealership optics have a wide distribution with an intentional hot spot that helps to deliver eye-catching light to the front row of cars in a dealership lot while also minimizing "backspill" (light that is thrown back towards the street).

### Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

### Ambient Temperature :

Max Power Temp Rating: 40°C (104°F)  
Middle Power Temp Rating: 52°C (125°F)  
Low Power Temp Rating: 58°C (137°F)

### Housing:

Die-cast aluminum

### Reflector:

Aluminum reflector with white polycarbonate

### Vibration Rating:

3G vibration rating per ANSI C136.31

### Effective Projected Area:

EPA = 0.32

### Gaskets:

High-temperature silicone gaskets

### Finish:

Formulated for high durability and long-lasting color

### Green Technology:

Mercury and UV free. RoHS-compliant components.

**Technical Specifications (continued)**

**Installation**

**Mounting:**

Wall mount

**Optical**

**BUG Rating:**

BUG Rating 80W: B2 U0 G1

BUG Rating 60W: B2 U0 G1

Bug Rating 40W: B1 U0 G1

**Other**


**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of ten (10) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

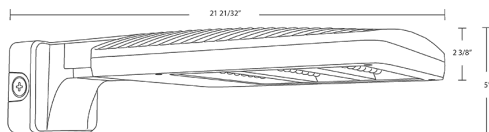

**Features**

- Wildlife-friendly amber light
- 0-10V dimmable standard
- IP66 Rated
- 100,000-Hour LED lifespan
- 10-Year, No-Compromise Warranty

## Ordering Matrix

| Family | Housing Size  | Distribution   | Mounting  | Wavelength        | Finish  | Voltage  | Options  |
|--------|---|--|---|-------------------|---|--|--|
| ALED   | S   | AT   | WM  | YA                | B   |  |  |
|        | <b>S</b> = Small (60W/40W)<br><b>M</b> = Medium (90W/78W) | <b>2T</b> = Type II <sup>1</sup><br><b>3T</b> = Type III<br><b>4T</b> = Type IV <sup>1</sup><br><b>5T</b> = Type V<br><b>AT</b> = Auto Dealership Optic <sup>1</sup> | <b>Blank</b> = Universal Pole Mount<br><b>SF</b> = Slipfitter<br><b>WM</b> = Wall Mount | <b>YA</b> = Amber | <b>Blank</b> = Bronze<br><b>W</b> = White <sup>1</sup><br><b>B</b> = Black <sup>1</sup> | <b>Blank</b> = 120-277V, 0-10V Dimming<br><b>/480</b> = 480V, 0-10V Dimming <sup>2</sup> | <b>/7PR</b> = 7 Pin Twistlock Receptacle<br><b>Blank</b> = No Option |

<sup>1</sup> Special order.

<sup>2</sup> 480V is only available in ALED Medium.