



## Technical Specifications (continued)

### Surge Protection:

2.5kV

For areas prone to surges, upgrade to 10kV surge protection available

### Other

#### Replacement:

Replaces 6-lamp T8, 4-lamp T5HO, or 250W MH


#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

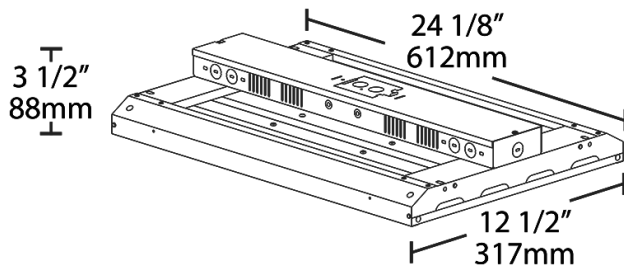

## Features

- High efficiency. Low price.
- Ideal for industrial warehouse spaces
- 100,000 hour LED lifespan
- 5-Year, limited warranty

## Ordering Matrix

Family	Length	Wattage	Color Temp	Voltage	Control Options	Emergency Options	Other Options
ARBAY	2	-	120		/LC		/8CP
	2 = 2 ft	<b>95</b> = 95W <b>120</b> = 120W <b>145</b> = 145W <b>160</b> = 160W	<b>Blank</b> = 5000K Cool <b>N</b> = 4000K Neutral	<b>Blank</b> = 120-277V, 0-10V Dimming <b>/480</b> = 480V, 0-10V Dimming	<b>Blank</b> = No Options <b>/PIR</b> = 120-277V, Passive Infrared Occupancy Sensor <b>/LC</b> = Lightcloud® Control <b>/LCS</b> = 120-277V, Lightcloud® Motion Sensor	<b>Blank</b> = No Options <b>/E2</b> = 120-277V, Battery <sup>1</sup>	<b>Blank</b> = No Options <b>/SP10</b> = 10kV Surge Protection <b>/8C</b> = 8' Cord only <sup>2</sup> <b>/8CP</b> = 8' Cord, Straight Blade Plug 120V, NEMA 5-15P <sup>3</sup> <b>/8CP2</b> = 8' Cord, Straight Blade Plug 277V, NEMA 7-15P <sup>3</sup> <b>/8CPT</b> = 8' Cord, Twistlock Plug 120V, NEMA L5-15P <sup>3</sup> <b>/8CPT2</b> = 8' Cord, Twistlock Plug 277V, NEMA L7-15P <sup>3</sup> <b>/8CPT4</b> = 8' Cord, Twistlock Plug 480V, NEMA L8-20P <sup>3</sup>

<sup>1</sup> For battery backup models with cord and plug dimming is not possible

<sup>2</sup> For cord only (8C) models, a 5 conductor cable will be used to make dimming possible

<sup>3</sup> For cord and plug (8CP, 8CP2, 8CPT, 8CPT2, 8CPT4) models 0-10V dimming is not possible