

| Project: | Туре: |
|--------------|-------|
| Prepared By: | Date: |

| Driver Info |) | LED Info | | |
|-------------|------------------|----------------|---------------|--|
| Type | Constant Current | Watts | 315W | |
| 120V | 2.56A | Color Temp | 5000K (Cool) | |
| 208V | N/A | Color Accuracy | 83 CRI | |
| 240V | N/A | L70 Lifespan | 100,000 Hours | |
| 277V | N/A | Lumens | 45,467 lm | |
| Input Watts | 316W | Efficacy | 143.9 | |
| | | | | |
| | | | | |

Technical Specifications

Compliance

UL Listed:

Suitable for damp locations

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PRV9T2IH

Construction

Operating Temperature:

-20°C (-4°F) to 50°C (122°F)

Housing:

22 gauge die formed with white powder coat finish. Y Hooks included for easy chain or cable mounting.

Reflector:

White painted, reflective, die formed painted steel

Lens:

Polycarbonate lens

Mounting:

V hooks and optional pendant mounting. AEROBAY® comes with two 42" chains.

Cord & Plug:

8 ft cord and NEMA L5-15P twistlock plug for 120V only.

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

LED Characteristics

LEDs:

Multi-chip, high-output, long-life LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Lightcloud

Lightcloud Sensor Installed:

Occupancy, vacancy, and closed loop daylight harvesting in one versatile sensor. In addition control any fixture in your Lightcloud integrated/embedded networked lighting luminaire-level control system. LLLC - capable of switching, 0-10Vdimming, power/energy monitoring. Can also be used to extend the range of the Lightcloud mesh network communication protocols.

DLC system - N1XMLOEATBA Learn more about Lightcloud.

Electrical

Driver:

Class 2, Constant Current, 120-277V, 50/60 Hz, 120V: 2.56A, 208V: 1.50A, 240V: 1.30A, 277V: 1.13A

THD:

3.34% at 120V, 6.82% at 277V

Power Factor:

99.9% at 120V, 96% at 277V

Surge Protection:

2.5kV

For areas prone to surges, upgrade to 10kV surge protection available



Technical Specifications (continued)

Other

Replacement:


Replaces 750W MH

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty.</u>

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

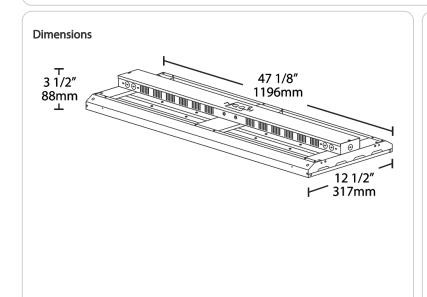

Features

High efficiency. Low price.

Ideal for industrial warehouse spaces

100,000 hour LED lifespan

5-Year, limited warranty



| Ordering Matrix | | | | | | | | | | |
|-----------------|-----------------|---|--|---|---|--|---|--|--|--|
| Family | Length | | Wattage | Color Temp | Voltage | Control Options | Emergency Options | Other Options | | |
| ARBAY | 4 | - | 315 | | | /LCS | | /8CPT | | |
| | 4 = 4 ft | | 315 = 315W 360 = 360W | Blank = 5000K Cool N = 4000K Neutral | Blank = 120-277V, 0-10V Dimming /480 = 480V, 0-10V Dimming | Blank = No Options /PIR = 120-277V, Passive Infrared Occupancy Sensor /LC = Lightcloud® Control /LCS = 120-277V, Lightcloud® Motion Sensor | Blank = No Options /E2 = 120-277V, Battery ¹ | Blank = No Options /SP10 = 10kV Surge Protection /8C = 8' Cord only² /8CP = 8' Cord, Straight Blade Plug 120V, NEMA 5-15P³ /8CP2 = 8' Cord, Straight Blade Plug 277V, NEMA 7-15P³ /8CPT = 8' Cord, Twistlock Plug 120V, NEMA L5-15P³ /8CPT2 = 8' Cord, Twistlock Plug 277V, NEMA L7-15P³ /8CPT4 = 8' Cord, Twistlock Plug 277V, NEMA L7-15P³ /8CPT4 = 8' Cord, Twistlock Plug 480V, NEMA L8-20P³ | | |
| | | | 2 | | | cord and plug dimming is not po | | | | |
| | | | | | | or cable will be used to make dimi [2, 8CPT4] models 0-10V dimming | J. | | | |