



Project: <input type="text"/>	Type: <input type="text"/>
Prepared By: <input type="text"/>	Date: <input type="text"/>

Driver Info		LED Info	
Type	Constant Current	Watts	10W
120V	0.08A	Color Temp	3000K
208V	N/A	Color Accuracy	93 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	776 lm
Input Watts	9.3W	Efficacy	83.4

Technical Specifications

Compliance

UL Listed:

Suitable for dry locations

IP Rating:

IP20

LED Characteristics

LEDs:

Long-life, high-efficacy, COB (Chip on Board) LEDs

Color Temperature:

3000K

Electrical

Driver:

Constant Current, Class 2, 120V, 60 Hz, 120V: 0.10A

Dimming Driver:

120V TRIAC Dimmers

Aux Power Supply:

No

Dim to Off:

No

Surge Protection:

Ring Wave L-N:2.5 kV, LN-PE 2.5 kV

Emergency Characteristics

Cold Weather Starting w/Battery Backup:

The minimum starting temperature is -4°F (-20°C)

Construction

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Housing:

Aluminum

Reflector:

Polycarbonate

Finish:

Formulated for high durability and long-lasting color

Performance

Lifespan:

100,000-Hour LED lifespan based on IESIm-80 results and TM-21 calculations

Installation

Mounting:

Pendant Mount

Optical

Optics:


36°

Other

5-Year Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

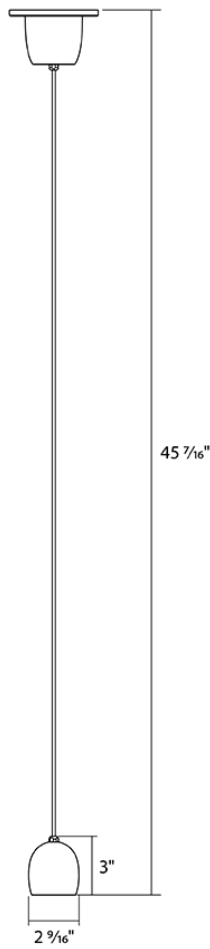

Ordering Matrix

Family	Wattage	Mounting	Color Temp	Optics	Finish	Driver
ARC		PM				
	Blank = 10W	Blank = H-Track Mount SM = Surface Mount TP = H-Track Pendant Mount PM = Pendant Mount RM = Semi-Recessed Mount	Blank = 3000K	Blank = 36°	Blank = White Housing/Gold Reflector B = Black Housing/Gold Reflector	Blank = 120V, TRIAC Dimming