



Color: Black

Weight: 0.9 lbs

Project:

Type:

Prepared By:

Date:

Driver Info		LED Info	
Type	Constant Current	Watts	10W
120V	0.08A	Color Temp	3000K
208V	N/A	Color Accuracy	93 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	785 lm
Input Watts	9.1W	Efficacy	86.3

Technical Specifications

Compliance

UL Listed:
Suitable for damp locations

IP Rating:
IP20

LED Characteristics

LEDs:
Long-life, high-efficacy, COB (Chip on Board) LEDs

Color Temperature:
3000K

Electrical

Driver:
Constant Current, Class 2, 120V, 60 Hz, 120V: 0.10A

Dimming Driver:
120V TRIAC Dimmers

Aux Power Supply:
No

Dim to Off:
No

Surge Protection:
Ring Wave L-N:2.5 kV, LN-PE 2.5 kV

Emergency Characteristics

Cold Weather Starting w/Battery Backup:
The minimum starting temperature is -4°F (-20°C)

Construction

Maximum Ambient Temperature:
Suitable for use in up to 104°F (40°C)

Housing:
Aluminum

Reflector:
Polycarbonate

Finish:
Formulated for high durability and long-lasting color

Performance

Lifespan:
100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

Installation

Mounting:
Recessed Mount


Optical

Optics:
36°

Other

5-Year Limited Warranty:
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

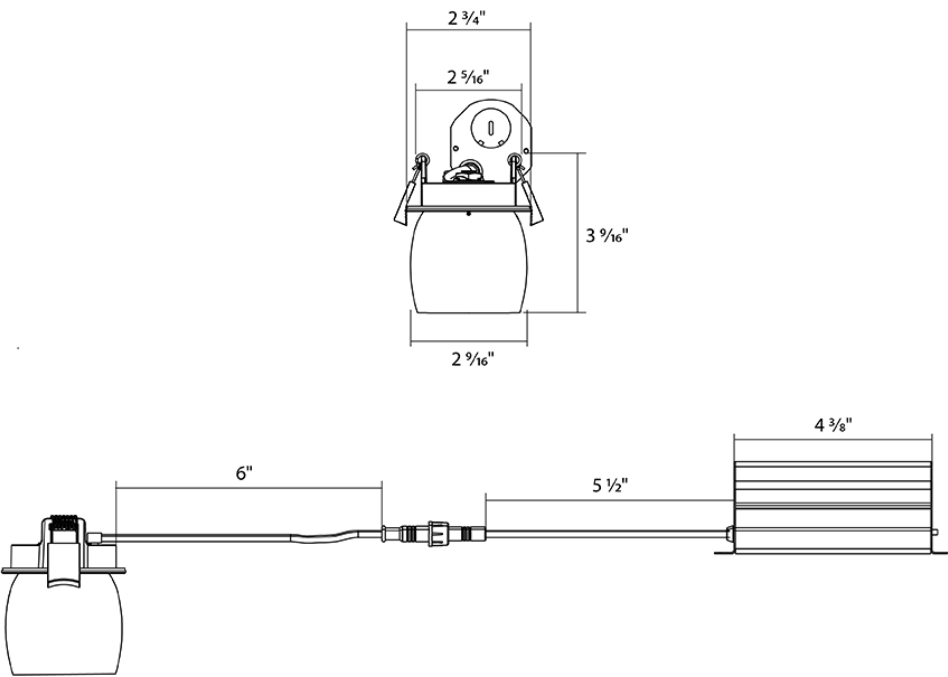

Ordering Matrix

Family	Wattage	Mounting	Color Temp	Optics	Finish	Driver
ARC		RM			B	
Blank = 10W Blank = H-Track Mount Blank = 3000K Blank = 36° Blank = White Housing/Gold Reflector Blank = 120V, TRIAC Dimming						
SM = Surface Mount B = Black Housing/Gold Reflector						
TP = H-Track Pendant Mount						
PM = Pendant Mount						
RM = Semi-Recessed Mount						