ARCTPB



Color: Black

Weight: 0.7 lbs

Project:	**Type:**
Prepared By:	**Date:**

Driver Info

Type	Constant Current
120V	0.09A
208V	N/A
240V	N/A
277V	N/A
Input Watts	10.2W

LED Info

Watts	10W
Color Temp	3000K
Color Accuracy	93 CRI
L70 Lifespan	100,000 Hours
Lumens	837 lm
Efficacy	82.1

Technical Specifications

Compliance

UL Listed:
Suitable for dry locations

IP Rating:
IP20

LED Characteristics

LEDs:
Long-life, high-efficacy, COB (Chip on Board) LEDs

Color Temperature:
3000K

Electrical

Driver:
Constant Current, Class 2, 120V, 60 Hz, 120V: 0.10A

Dimming Driver:
120V TRIAC Dimmers

Aux Power Supply:
No

Dim to Off:
No

Surge Protection:
Ring Wave L-N:2.5 kV, LN-PE 2.5 kV

Emergency Characteristics

Cold Weather Starting w/Battery Backup:
The minimum starting temperature is -4°F (-20°C)

Construction

Maximum Ambient Temperature:
Suitable for use in up to 104°F (40°C)

Housing:
Aluminum

Reflector:
Polycarbonate

Finish:
Formulated for high durability and long-lasting color

Performance

Lifespan:
100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

Installation

Mounting:
H-Track Pendant Mount

Optical


Optics:
36°

Other

5-Year Limited Warranty:
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Dimensions

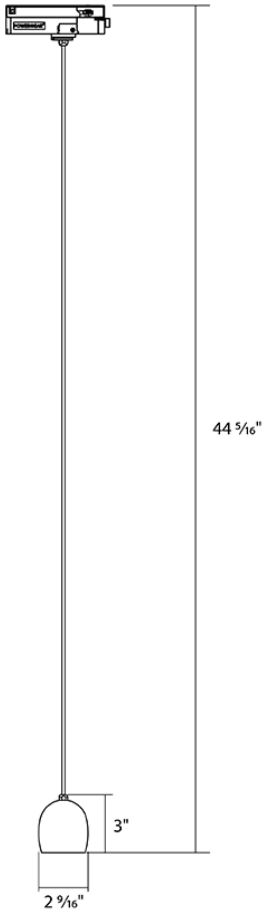

Ordering Matrix

Family	Wattage	Mounting	Color Temp	Optics	Finish	Driver
ARC		TP			B	
	Blank = 10W	**Blank =** H-Track Mount **SM =** Surface Mount **TP =** H-Track Pendant Mount **PM =** Pendant Mount **RM =** Semi-Recessed Mount	**Blank =** 3000K	**Blank =** 36°	**Blank =** White Housing/Gold Reflector **B =** Black Housing/Gold Reflector	**Blank =** 120V, TRIAC Dimming

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice