



Color: White

Weight: 0.1 lbs

Project: <input type="text"/>	Type: <input type="text"/>
Prepared By: <input type="text"/>	Date: <input type="text"/>

Technical Specifications

Performance

Product Type:

Mounting Bracket

Description:

Ceiling sensors for indoor and outdoor applications for low or high ceilings. Configure sensors for occupancy, vacancy, and daylight using the Lightcloud Blue app. Now with load switching capacity up to 8A.

Installation

Mounting:

Mounts to 1/2" knockout on junction box

Construction

Enclosure Material:

Constructed from frosted, shatter-resistant polycarbonate

Compliance

Listings:

UL Listed, UL Recognized

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

IP Rating:

IP66

DLC NLC Listed:

This system is on the Design Lights Consortium (DLC) Network Lighting Controls (NLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

DLC system - N1XMLOEATBA (Interior); NHCZ2BIA17L (Exterior)

California Title 20 Compliant:

No

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:


Complies with Part 15 of the FCC Rules

Other

5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

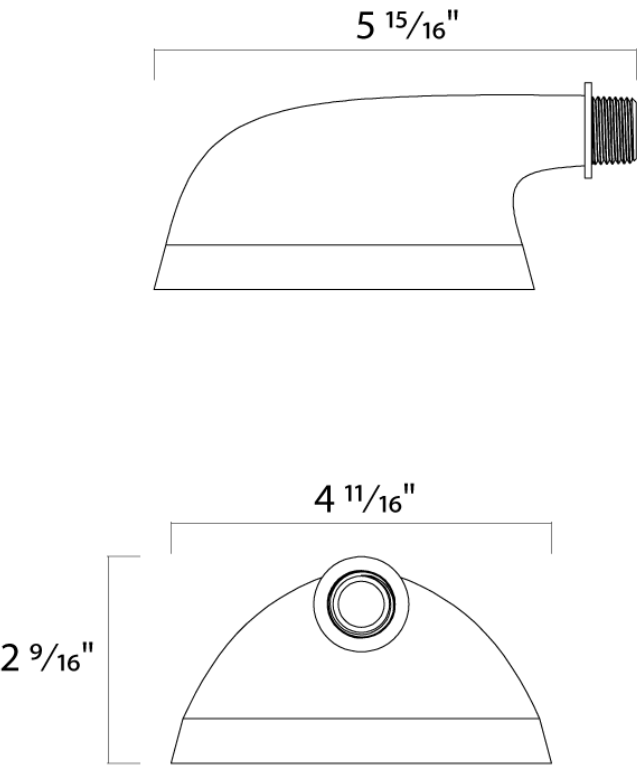

Ordering Matrix

Family	Control
ARM	/LCB

/LCB = Lightcloud Blue