
# BA11-5-E12-927-F-F

# **RAB** Residential

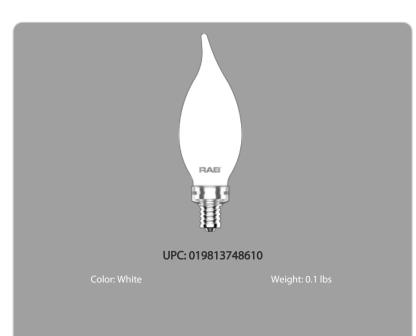

Project:	Туре:
Prepared By:	Date:

# **Technical Specifications**

### Performance Product Type:

Decorative

Input Wattage: 5W

Wattage Equivalency: 60W Incandescent

Lumens (Nominal): 500lm

Efficacy: 91lm/W

L70 Lifespan: 15,000 Hours

Construction

Bulb Shape: BA11

Finish: Frosted

Base Type: E12

For Use Outdoors in Open Fixtures: No

## LED Characteristics

Color Temperature: 2700K Soft White

Color Accuracy (CRI): 90 CRI

# Electrical

Power Factor: 0.7

**Operating Temperature:** -20°C to 45°C (-4°F to 113°F)

Dimmable: Yes, down to 10%

Input Voltage: 120V

Flicker: <30%

Optical Beam Angle: 360°

# Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <u>rablighting.com/warranty</u>.

#### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

#### Compliance

ETL Qualified: Yes

#### **Energy Star Approved:** This product is ENERGY STAR<sup>®</sup> Version 2.0 Certified

Energy Star ID: 2330351

California Energy Commission (CEC) Status: Lawful for Sales in California


# **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.9	5
PALLET	3180	38.4	46.3	37.2

±180°

90

# Dimension



## Features

Replacement for conventional decorative lamps

Filament LED construction gives a unique traditional look and feel for decorative and ambient applications

Produces rich and vibrant colors, >90CRI

Rated for use in enclosed and open fixtures in dry and damp locations

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs


Title 20 Compliant, ENERGY STAR Compliant, UL Listed

Smooth uniform dimming down to 10% (check dimmer compatibility list)

**Light Distribution** 

-120

-90°



0