

Technical Specifications (continued)

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Electrical

Driver:

Constant Current, Class 2, 100-277V, 50/60 Hz, 4kV Surge Protection, 700mA, 120V: 0.24A, 208V: 0.18A, 240V: 0.15A, 277V: 0.12A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.


THD:

8.22% at 120V, 7.85% at 277V

Power Factor:

98.98% at 120V, 94.6% at 277V

Dimensions

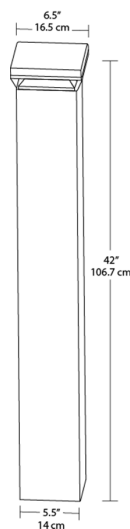

Features

- Patented base mount design for super sturdy installation
- Durable construction and frosted vandal-resistant polycarbonate lens
- 4 configurations to provide 360°(24W), 270°(18W), 180°(12W) or 90°(12W) lighting pattern
- Precision-engineered optics deliver maximum downward lighting without glare
- Four leveling screws provided for easy installation
- 100,000-hour LED lifespan

Ordering Matrix

Family	Wattage	Color Temp	Finish		Distribution	Voltage	Dimming	Backup
BLED	18	Y	W	-			/D10	
	12 = 12W 18 = 18W 24 = 24W	Blank = 5000K Cool N = 4000K Neutral Y = 3000K Warm	Blank = Bronze W = White K = Black		Blank = Standard 180 = 180 degrees (12W only)	Blank = No Option (120-277V) /480 = 480V (24W only)	Blank = None (Standard) /D10 = 0-10V Dimming	Blank = No Battery Backup /E = Battery Backup (24W only) /EC = Battery Backup Cold Weather (24W only)