



Upscale design, high-end performance, undeniable value. BOA is designed with proprietary optics that deliver maximum lumens and conceal the LED light sources behind the lens to create a pleasing dimensional illuminance with soft blended beam edges. Mounting hardware included.

Color: White

Weight: 1.8 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| | |
|-------------|------------------|
| Type | Constant Current |
| 120V | 0.08A |
| 208V | 0.06A |
| 240V | 0.05A |
| 277V | 0.05A |
| Input Watts | 9.6W |

LED Info

| | |
|----------------|---------------|
| Watts | 10W |
| Color Temp | 3000K (Warm) |
| Color Accuracy | 86 CRI |
| L70 Lifespan | 100,000 Hours |
| Lumens | 700 lm |
| Efficacy | 72.9 lm/W |

Technical Specifications

Compliance

UL Listed:

Suitable for damp locations. Recommended for indoor use only.

IESNA LM-79 & lm-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA lm-79 and lm-80

Electrical

Drivers:

120 - 277V, 0 - 10V dimming down to 10%, 93.7% power factor, 1 kV surge protection

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

Electrical Connection:

Includes 5 conductor 300V rated 12' long electrical cable

Optical

Reflector:

40° reflector

Aperture:

2.5"

Construction

Housing:

Precision extruded aluminum

Lens:

High-transmission, microprismatic acrylic lens for smooth light distribution and uniformity

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Mounting:

12' of aircraft cable provided with cable grippers for easy adjustment after installation

LED Characteristics

LEDs:

Discrete LEDs on PCB board

Color Consistency:

3-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Other


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

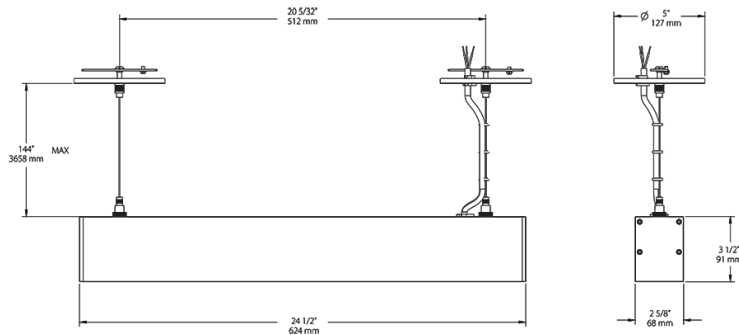

Features

All mounting hardware included:

12 foot aircraft cables, ceiling canopies and height adjusting cable grippers.

3-step binning for color consistency

0-10V dimming, standard

100,000-Hour LED lifespan

Ordering Matrix

| Family | Length | Mounting | Wattage (5W/ft or 10W/ft) | Driver | Optics | Color Temp | Finish | Lightcloud | Battery Backup | | | | | | |
|--------|-----------------------|-------------|---------------------------|-------------|-----------|------------|--------------------|-------------|----------------|---|---|---|---|--|--|
| BOA | - | 2 | P | - | 10 | D10 | - | 40 | - | Y | - | W | - | | |
| | 2 = 2 ft | S = Surface | 10 = 2FT | D10 = 0-10V | 40 = 40 | N = 4000K | W = | Blank = No | Blank = No | | | | | | |
| | 4 = 4 ft | P = Pendant | 5W/FT | Dimming | degrees | Neutral | Matte | Lightcloud® | Battery | | | | | | |
| | 6 = 6 ft ¹ | | 20 = 2FT | | reflector | YN = | White | /LC = | Backup | | | | | | |
| | 8 = 8 ft | | 10W/FT or | | | 3500K | S = | Lightcloud® | /E2 = | | | | | | |
| | 10 = 10 ft | | 4FT 5W/FT | | | Warm | Matte | Controller | Battery | | | | | | |
| | ₁ | | 30 = 6FT | | | Neutral | Silver | | Backup | | | | | | |
| | 12 = 12 ft | | 5W/FT | | | Y = 3000K | B = | | | | | | | | |
| | ₁ | | 40 = 4FT | | | Warm | Matte | | | | | | | | |
| | | | 10W/FT or | | | | Black ² | | | | | | | | |
| | | | 8FT 5W/FT | | | | | | | | | | | | |
| | | | 50 = 10FT | | | | | | | | | | | | |
| | | | 5W/FT | | | | | | | | | | | | |
| | | | 60 = 6FT | | | | | | | | | | | | |
| | | | 10W/FT or | | | | | | | | | | | | |
| | | | 12FT 5W/FT | | | | | | | | | | | | |
| | | | 80 = 8FT | | | | | | | | | | | | |
| | | | 10W/FT | | | | | | | | | | | | |
| | | | 100 = 10FT | | | | | | | | | | | | |
| | | | 10W/FT | | | | | | | | | | | | |
| | | | 120 = 12FT | | | | | | | | | | | | |
| | | | 10W/FT | | | | | | | | | | | | |

¹ 6, 10 and 12 foot lengths available by special request.

² Matte Black finish color available by special request.