



Color: White

Weight: 0.0 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	30/21/18/15/8W
120V	N/A	Color Temp	3000/3500/4000K
208V	N/A	Color Accuracy	93-94 CRI
240V	N/A	L70 Lifespan	100,000 Hours
277V	N/A	Lumens	1,011-3,897 lm
Input Watts	7.9-29.6W	Efficacy	123.3-139.9 lm/W

Technical Specifications

Field Adjustability

Field Adjustable:

Field Adjustable Light Output:
30W/21W/18W/15W/8W (factory default 30W)
Color Temperature Selectable:
3000K, 3500K and 4000K (factory default 4000K)

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: S-NWP6Z5

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60 Hz:
30W: 120V: 0.25A, 208V: 0.15A, 240V: 0.13A, 277V: 0.12A
21W: 120V: 0.18A, 208V: 0.11A, 240V: 0.10A, 277V: 0.09A
18W: 120V: 0.15A, 208V: 0.09A, 240V: 0.09A, 277V: 0.08A
15W: 120V: 0.13A, 208V: 0.08A, 240V: 0.07A, 277V: 0.07A
7.5W: 120V: 0.07A, 208V: 0.05A, 240V: 0.05A, 277V: 0.05A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

3.67% at 120V, 7.76% at 277V

Power Factor:

99.6% at 120V, 93.5% at 277V

Surge Protection:

2 kV

Continuous Runs:

Maximum wattage for a continuous run should not exceed 600W

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Performance Data:

[Click here for the BOA3 performance data](#)

Construction

Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

Maximum Ambient Temperature:

Suitable for use in up to 104°F (40°C)

Housing:

Aluminum

Technical Specifications (continued)

Lens:
Polycarbonate reflective louvers lens

Reflector:
Polyethylene Terephthalate (PET)

Finish:
Formulated for high durability and long-lasting color

Green Technology:
Mercury and UV free. RoHS-compliant components.

Installation
Mounting:
Trimless design for a clean and seamless appearance

Sensor Settings
Brightness:
0%-100%/Quick setting: 70%/80%/90%/100%
(Factory Setting: 100%)

Hold Time:
10s/1min/10min/30min (Factory Setting: 1 Minute)

Daylight Threshold:
10Lux/30Lux/50Lux/100Lux/Disable (Factory
Setting: Disabled)

Sensitivity:
100%

Stand-by Dimming Level:
10%/20%/30%/50% (Factory Setting: 20%)

Stand-By Time:
1min/30min/60min/+∞ (Factory Setting: 1 Minute)

Operating Voltage:
12 ± 2V DC

Operating Current:
30mA

Output:
DIM 0-10V

Stand-By Power:
<0.5W

Lux On-Off:
Adopted dual PD technology


Height:
Max 20ft/6M (ceiling mounted)

Detection Range:
Max 26ft/8M (ceiling mounted) Max 20ft/6m (wall
mounted)

Operating Temperature:
-30°C to 60°C (-22°F to 140°F)

Other
5-Year Limited Warranty:
The RAB 5-year, limited warranty covers light output,
driver performance and paint finish. RAB's warranty
is subject to all terms and conditions found at
rablighting.com/warranty.

Dimensions

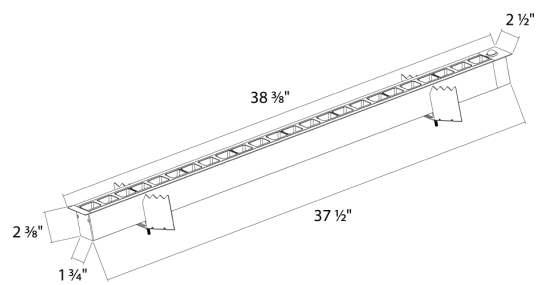

Features

- 100,000-Hour LED lifespan
- 0-10V dimming
- 5-Year, limited warranty

Ordering Matrix

Family	Size (Wattage)	Mount	Lens	Light Output	Color Temp	Driver	Finish	Options
BOA	3	R	L					/PIR
	3 = 3 ft (30/21/18/15/8W) 4 = 4 ft (40/28/24/20/10W) 8 = 8 ft (80/56/48/40/20W) 2 = 2 ft (20/14/12/10/5W)	R = Recessed	Blank = Flat L = Louvers	Blank = Downlight	Blank = 3000/3500/4000K CCT Adjustable	Blank = 120-277V, 0-10V Dimming	Blank = White	Blank = No Option /MVS = Microwave Occupancy Sensor /PIR = Passive Infrared Occupancy Sensor /LCBS = Lightcloud Blue w/PIR Sensor /LCBS/MVS = Lightcloud Blue w/MVS Sensor /E = Battery Backup ² /MVS/E = Microwave Occupancy Sensor w/Battery Backup ² /PIR/E = Passive Infrared Occupancy Sensor w/Battery Back Up ² /LCBS/E = Lightcloud Blue w/PIR Sensor and Battery Backup ² /LCBS/MVS/E = Lightcloud Blue w/MVS Sensor and Battery Backup ²

¹ Only available on 4 ft and 8 ft models only