# BOAS8LB/LCBS/MVS/E



Color: Black

Weight: 0.0 lbs

| | |
|---|---|
| **Project:** | **Type:** |
| **Prepared By:** | **Date:** |

### Driver Info

| | |
|---|---|
| Type | Constant Current |
| 120V | 0.68A |
| 208V | 0.39A |
| 240V | 0.34A |
| 277V | 0.30A |
| Input Watts | 80.7-81.2W |

### LED Info

| | |
|---|---|
| Watts | 80W |
| Color Temp | 2700-6500K |
| Color Accuracy | N/A |
| L70 Lifespan | 100,000 Hours |
| Lumens | 8978-9971 lm |
| Efficacy | 110.8-123.5 lm/W |

## Technical Specifications

### Lightcloud

**Gateway Required:**
No

**Communication Protocol:**
Bluetooth

**SmartShift:**
SmartShift Ready to easily configure automated lighting profiles to automatically adjust brightness and color temperature for circadian and aesthetic needs.

**Light Shows:**
No, this product is not compatible with dynamic color changing Light Shows. Contact RAB for more information.

**Range:**
Indoor: Up to 60 feet between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction; Up to 200 feet clear line of sight.

Outdoor: Up to 60 feet clear line of sight; Up to 18 feet around corners

**Spacing Criteria:**
Lightcloud Blue devices should be placed within the specified range to communicate within the network. Building materials such as brick, concrete, and steel construction or heavy vegetation, bushes or trees may require additional Lightcloud Blue devices to extend around an obstruction.

### Sensor Settings

**Remote Control Accessory:**
Yes, with additional devices, sold separately. Small projects use Nano to link with Amazon Alexa or Google Home for wireless control using those apps. Larger projects require one XDIM Bridge per Area plus a Gateway for full remote access via Lightcloud web portal or mobile app.

**Sensor Connection Type:**
Intergrated

**Max Mounting Height:**
8 to 12 feet

**Detection Range:**
20 ft diameter at 9 ft mounting height

**Sensor Technology:**
Microwave (MVS)

**Default Setting:**
Default:
Motion Sensitivity: High
Brightness when triggered : 100%
Hold time: 20 minutes
Standby to dim: 20%
Standby time: 1 minute
When vacant: Off
Once paired to Lightcloud Blue, the sensor will be disabled. Sensor settings can be adjusted using the mobile app.

**Adjustable Sensor Settings?:**
Yes, using the Lightcloud Blue mobile app

**Sensing Type:**
Sensors can be configured for Occupancy, Vacancy, Daylight Harvesting and Photocell.

**Daylight Harvesting:**
Continuous: Dim levels will continuously adjust based on the Target Light Level set in the Lightcloud Blue mobile app.

**Photocell:**
Yes, configurable using Lightcloud Blue mobile app

### Product Overview

**Product Type:**
Architectural Linear Light, SmartShift Ready


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

## Technical Specifications (continued)

### Performance

**Description:**
Modern linear lighting with indirect distribution and tunable white color temperature. Easily create circadian or aesthetic lighting profiles with preset schedules that automatically adjust light levels and color temperature throughout the day, with flexible configurations, colors, and lengths.

**Wattage Equivalency:**
(6) F32T8; (3) F96T8

**Input Wattage:**
80W

**Lumens (Nominal):**
9,600lm

**Efficacy:**
120lm/W

**L70 Lifespan:**
100,000-Hour LED lifespan based on IES LM-70 results

### Electrical

**Driver:**
Constant Current, Class 2 120-277 50/60; 120V: 670mA; 208V: 390mA; 240V: 350mA; 277V: 310mA

**THD:**
<25%

**Power Factor:**
>0.87

**Dimmable:**
Yes, up & down light is dimmable down to 5% with Lightcloud Blue mobile app and devices.
This product will not operate properly when connected to a standard TRIAC/ELV or 0-10V dimmer or dimming control.

**Operating Temperature:**
-4°F to 104°F (-20 to 40°C)

**Flicker:**
<30%

### Emergency

**Emergency Operation:**
90 minutes
Does not meet UL924 requirements

### LED Characteristics

**Beam Angle:**
110°±5°

**Light Distribution:**
Up, Down or Up/Down
Selectable via the Lightcloud Blue mobile app.

**Color Temperature:**
Default: 4000K
Adjustable using the Lightcloud Blue mobile app
Tunable White 2700K - 6500K

**Color Tuning:**
No

**Color Accuracy (CRI):**
>90 CRI

**Natural Spectrum:**
No

**R9 Value:**
High color performance with R9 greater than 50

**Color Consistency:**
<5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

### Installation

**Mounting:**
Suspended pendant

**Continuous Run:**
No, for continuous runs consider the BOA Field-Adjustable Linear models with Lightcloud Blue.

### Construction

**Length:**
8 ft

**Endcap Material:**
Polycarbonate and aluminum

**Enclosure Material:**
Aluminum

**Lens Finish:**
Frosted

**Lens:**
Louver

### Compliance

**Listings:**
UL Listed, UL Classified

**Environment:**
Suitable for use indoors in dry and damp environments.

**IC Rated:**
No

**Air Tight:**
No

**Energy Star Approved:**
No

**DLC Listed:**
No

**DLC NLC Listed:**
This system is on the Design Lights Consortium (DLC) Network Lighting Controls (NLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.
DLC system - N1XMLOEATBA (Interior); NHCZ2BIA17L (Exterior)

**Certification Model Number:**
BOAS8LB/LCBS/MVS/E

**California Title 20 Compliant:**
No

**California Title 24 JA8 Compliant:**
No

**California Energy Commission (CEC) Status:**
Lawful for Sales in California

**IESNA LM-79 & LM-80 Testing:**
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**RoHS:**
Mercury and UV free. RoHS-compliant components.

**FCC:**
Complies with Part 15 of the FCC Rules

### Other

**Compatible Products:**
Compatible with other Lightcloud Blue products. to expand system features.


**Compatible Accessories:**
BOAS-WM
Wall Mount Kit


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

## Technical Specifications (continued)

**5-Year Limited Warranty:**
The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

## Dimensions

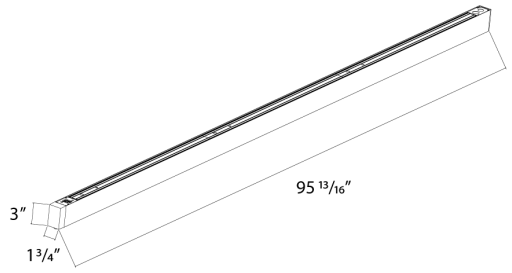


## Features

- Available in 2', 3', 4', 8' with up/down light
- Suspended mount with optional flat or louver lens
- Wireless communication via Bluetooth Mesh with Lightcloud Blue
- SmartShift Ready for circadian and aesthetic lighting profiles
- 5-Year, No-Compromise Warranty

## Ordering Matrix

| Family | Size/Wattage | Mount | Lens | Color Temp | Light Output | Driver | Finish | Controls | Battery Backup |
|---|---|---|---|---|---|---|---|---|---|
| BOAS | 8 | | L | | | | B | /LCBS/MVS | /E |
| | **2 =** 2 ft, 20W<br>**3 =** 3 ft, 30W<br>**4 =** 4 ft, 40W<br>**8 =** 8 ft, 80W | **Blank =** Pendant Mount | **Blank =** Flat<br>**L =** Louvers | **Blank =** 2700-6500K Tunable White | **Blank =** Up/Down | **Blank =** 120-277V | **B =** Black<br>**S =** Silver<br>**W =** White | **/LCBS =** Lightcloud Blue w/PIR Sensor<br>**/LCBS/MVS =** Lightcloud Blue w/MVS Sensor | **Blank =** None<br>**/E =** Battery Backup |


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice