



Weight: 0.0 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

**Technical Specifications**

**Performance**

**Product Type:**

Reflectors for CD34 Cylinders

**Description :**

Field swappable lenses and pendant mount accessories.

**LED Characteristics**

**Beam Angle:**

60°

**Installation**

**Mounting:**

Twist-on

**Construction**

**Size:**

3"

**Shape:**

Round

**Compliance**

**Certification Model Number:**

CD34REF-360D

**California Title 20 Compliant:**

No

**California Title 24 JA8 Compliant:**

No

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**RoHS:**

Mercury and UV free. RoHS-compliant components.

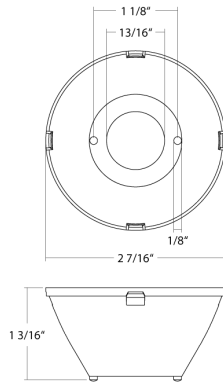
**FCC:**

Complies with Part 15 of the FCC Rules

**Other**

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions****Features**

Aluminum extrusion housing and die-cast covers available in black, bronze, or white

Field interchangeable optics sold separately for 25°/40°/60° beam angle

Field-adjustable color temperature 3000/4000/5000K (indoor);  
2700/3000/3500/4000/5000K (outdoor).

Dimmable on 0-10V systems (indoor); integrated photocell (outdoor)