


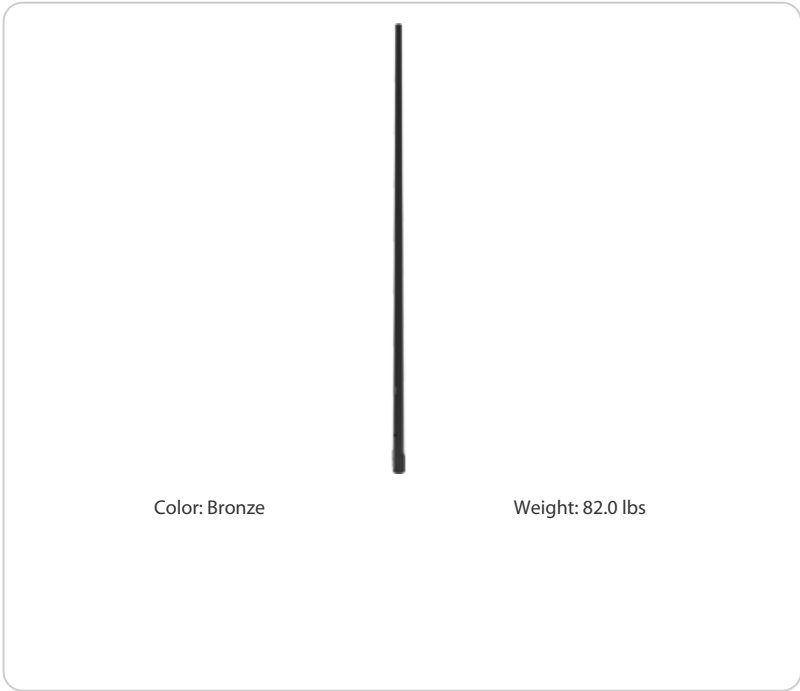

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

Technical Specifications

Compliance

Buy American Act Compliance:

This product complies with the Buy American Act

The Build America, Buy America Act (BABA):

Light poles meet The Build America, Buy America Act (BABA) (Pub. L. No. 117- 58, §§ 70901-52).

Construction

Pole Material:

Reinforced fiberglass

Maximum EPA Per Wind Zone:

- 90 mph: 10.8
- 100 mph: 7.6
- 110 mph: 5.8
- 120 mph: 4.5
- 130 mph: 3.7
- 140 mph: 3.5
- 150 mph: 2.9
- 160 mph: 2.4
- 170 mph: 1.9
- 180 mph: 1.6

Burial Height:

5 ft

Height:

25 ft

Shape:

Round Tapered

Finish:

All poles come with bronze finish and 3-layer of protection against UV degradation. The third layer is the thermally bonded outer coating.

Pole Drilling:

All poles HH covers and cable entry are factory drilled

Cable Entry:

Cable entry provided on the direct burial poles with a diameter of 2 1/4"

Hand Hole and Covers:

2 1/2" x 5" hand hole is standard for all the poles and are located at 18" above ground level. The hand hole covers are made of durable, weather resistant material.

Caps:

The plastic cap is pre-assembled to the pole before shipping

Integral Anti Rotation Flange:

Direct bury poles comes with an integral anti rotation flange

Other

2-Year Limited Warranty:

The RAB 2-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


Accessories:

Poles are shipped with pole cap. The anchor bolt kit, base covers for round poles are sold separately BOLT4/7: Anchor bolt kit for round poles. BCK-CP-R: Round composite pole base cover.

Terms of Sale:

Pole Terms of Sale is available [online](#).

Dimensions

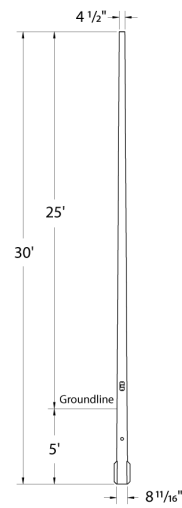

Features

- Complies with Buy America Act
- 2-Year, limited warranty

Ordering Matrix

| Family                           | Shape | Burial Height        | Height                                 | Drilled/Welded Tenon             |
|----------------------------------|-------|----------------------|----------------------------------------|----------------------------------|
| CD                               | TR    | 5                    | 25                                     | D                                |
| TR = Round Tapered<br>S = Square |       | 4 = 4 ft<br>5 = 5 ft | 15 = 15 ft<br>20 = 20 ft<br>25 = 25 ft | D = Drilled<br>WT = Welded Tenon |